TM 11-6660-204-24P-1

TECHNICAL MANUAL

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS) FOR

RECORDING SET, WEATHER DATA AN/TMQ-5C (NSN 6660-00-682-4500)

HEADQUARTERS, DEPARTMENT OF THE ARMY

J1 - MINITURE PHONE JACK
J2 THRU J6 - STANDARD PHONE JACK
R1 THRU R4 - ADJUST FOR OUTPUT STRENGTH

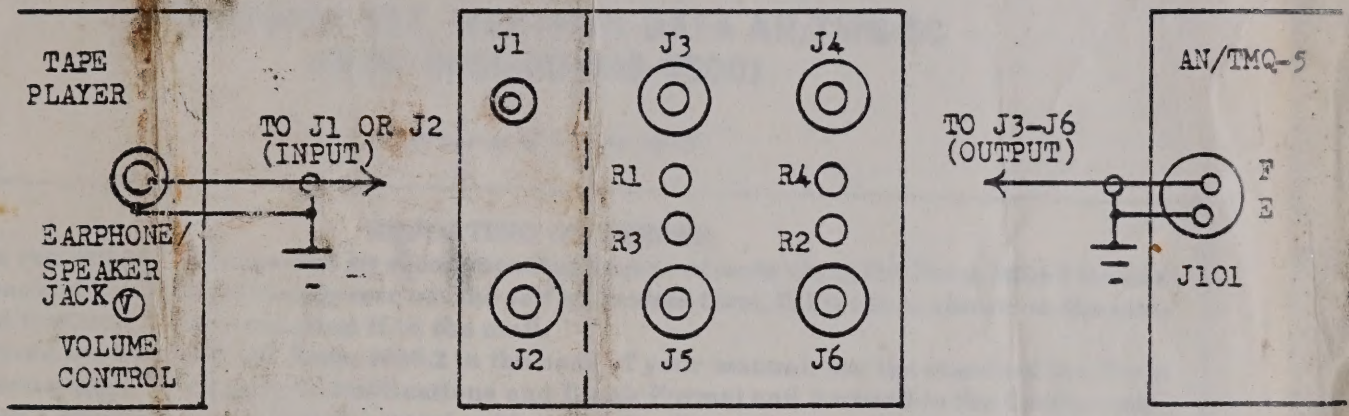

JUNCTION BOX AND SIGNAL ATTENUATOR

PREFLIGHT INSTRUCTIONS FOR TAPED MET FLIGHT

1. Using the TMQ-5 split cable CX-1493/U, install a standard phone plug on the two split leads coming from pins "F" and "E", J101 of the TMQ-5. Pin "F" is the met signal lead and pin "E" is the ground lead.

2. Setting up the equipment.

a. plug Q-5 split cable into either of J3 thru J6. Plug tape player cable into the earphone/speaker jack on the player and the other end to J1 or J2, depending on the size of the plug.

b. b. Apply power to the tape player and TMQ-5 and allow for normal warm up time.

c. Activate the tape player to play a met flight tape.

d. Adjust volume control on the tape player until signal is of sufficient strength to drive the Q-5 pen to a normal position on the chart.

e. The signal strength can also be varied by the variable resistors on the junction box.

3. Junction boxes will be forwarded to the Met Sections.

TECHNICAL MANUAL
No. 11-6660-204-24P-1

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, *30 November 1978*

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOL LISTS (INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS) FOR RECORDING SET, WEATHER DATA AN/TMQ-5C (NSN 6660-00-682-4500)

Current as of 1 June 1978

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 located in the back of the manual. Simply tear out the self addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

Table of Contents

			Page	Illus Figure
SECTION	I.	INTRODUCTION	1	
	II.	REPAIR PARTS LIST	5	
Group	00	Recording Set, Weather Data AN/TMQ-5C	5	1
	01	Cabinet, Electrical Equipment CY-1390A/TMQ-5	9	2-6
	02	Panel, Control C-834A/TMQ-5	23	7,8
	03	Converter, Signal Data CV-146A/TMQ-5	31	9-13
	04	Cabinet Subassembly, Electrical Equipment MX-1482/TMQ-5	43	14
	05	Power Supply PP-968A/TMQ-5	47	15-18
	06	Recorder, Frequency Time RD-88C/TMQ-5	59	19-34
	07	Case, Accessories CY-930/TMQ-5	107	35
	08	Computer, Humidity-Temperature CP-223C/U	109	36
	09	Cable Assembly, Special Purpose, Electrical CX-2338/U	111	37
	10	Cable Assembly, Special Purpose, Electrical CX-2339/U	113	38
	11	Cable Assembly, Power Electrical CX-1492/U (See TM 11-6660-204-25P for parts)		
	12	Cable Assembly CX-3711/TMQ-5 (See TM 11-6660-204-25P for parts)		
	13	Cable Assembly, Special Purpose, Electrical CX-2337/TMQ-5 (See TM 11-6660-204-25P for parts)		
	14	Cable Assembly CX-3712 (See TM 11-6660-204-25P for parts)		
SECTION	III.	SPECIAL TOOLS LIST (Not applicable)		
	IV.	National stock number and part number index	114	

* This manual supersedes TM 11-6660-204-24P-1, 11 April 1975.

SECTION I
INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support, and general support maintenance of the AN/TMQ-5C. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	*Definition*
PA	Item procured and stocked for anticipated or known usage.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(*a*) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	*Application/Explanation*
O	—Support item is removed, replaced, used at the organizational level.
F	—Support item is removed, replaced, used at the direct support level.
H	—Support item is removed, replaced, used at the general support level.

(*b*) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	*Application/Explanation*
O	—The lowest maintenance level capable of complete repair of the support item is the organizational level.
F	—The lowest maintenance level capable of complete repair of the support item is the direct support level.
H	—The lowest maintenance level capable of complete repair of the support item is the general support level.
D	—The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	—Non reparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability codes	*Definition*
Z	—Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
O	—Reparable item. When uneconomically reparable, condemn and dispose at organizational level.
F	—Reparable item. When uneconomically reparable,

Recoverability codes — *Definition*

condemn and dispose at the direct support level.

H —Reparable item. When uneconomically reparable, condemn and dispose at the general support level.

D —Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue will satisfy the required units of measure will be requisitoned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc).

4. Special Information

The following publications pertain to the AN/TMQ-5C and its components:

TM 11-6660-204-10, Radiosonde Recorders AN/TMQ-5, AN/TMQ-5A, AN/TMQ-5B, and AN/TMQ-5C

TM 11-6660-204-25, Radiosonde Recorders AN/TMQ-5, AN/TMQ-5A, AN/TMQ-5B, and AN/TMQ-5C

TM 11-6660-204-25P, Radiosonde Recorders AN/TMQ-5, AN/TMQ-5A, AN/TMQ-5B, and AN/TMQ-5C

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)

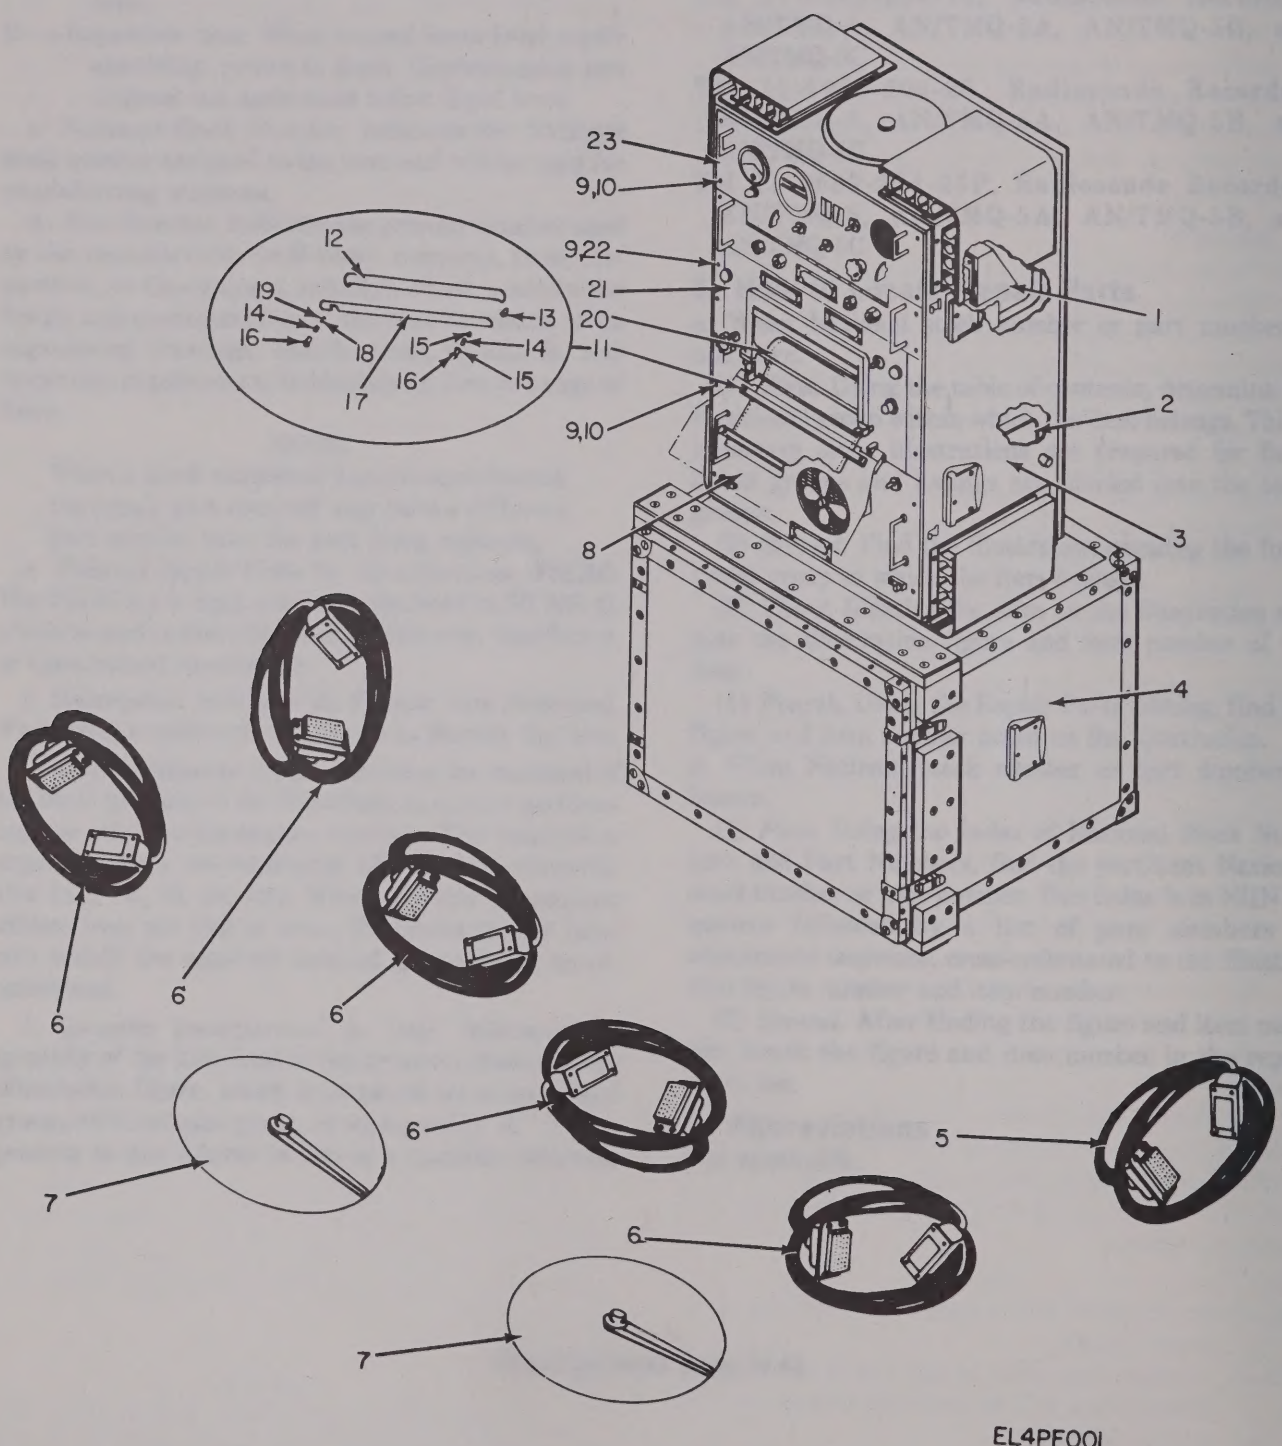

Figure 1. Recording Set, Weather Data AN/TMQ-5C.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 00 RECORDING SET, WEATHER DATA AN/TMQ-5C		
1	1	PAOFF	6660-00-503-0669	CV146ATMQ5	80058	CONVERTER,SIGNAL	EA	1
1	2	PAFFF	6660-00-553-1946	PP968ATMQ5	80058	POWER SUPPLY	EA	1
1	3	XDFDD		CY1390ATMQ5	80058	CABINET,ELECTRICAL	EA	1
1	4	PAOOO	6660-00-537-7902	CY930TM05	80058	CASE ACCESSORIES	EA	1
1	5	PAOHH	6660-00-503-0672	CX-2339/U	80058	CABLE ASSEMBLY	EA	1
1	6	PAOHH	6660-00-503-0671	CX-2338/U	80058	CABLE ASSEMBLY	EA	5
1	7	PAOOO	6660-00-179-8633	CP-223C/U	80058	COMPUTER,TMP-HUMID	EA	2
1	8	PAFFF	6660-00-614-9859	MXL482TMQ5	80058	CABINET SUBASSEMBLY	EA	1
1	9	PAFZZ	5305-00-989-7434	MS35207-263	96906	SCREW,MACHINE	EA	36
1	10	PAFZZ	5310-00-045-3296	MS35338-43	96906	WASHER,LOCK	EA	4
1	11	PAOFF	6660-00-788-2133	SCC125081	80063	PAPER WEIGHT ASSY	EA	1
1	12	XDFZZ		SCC125087	80063	BAR,CLAMPING	EA	1
1	13	XDFZZ		SCB125088	80063	PIN,STRAIGHT	EA	1
1	14	XDFZZ		SCB125086	80063	SPRING,COMPRESSION	EA	2
1	15	XDFZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	2
1	16	XDFZZ		SCB125085	80063	SCREW,THUMB	EA	2
1	17	XDFZZ	6660-00-373-2843	SCC125084	80063	BAR,CLAMPING	EA	1
1	18	XDFZZ		SCB125083	80063	SPACER	EA	1
1	19	XDFZZ		SCB125082	80063	WASHER,FLAT	EA	1
1	20	PAOZZ	6660-00-682-6510	ML432ATMQ5	80058	PAPER,GRAPH	EA	1
1	21	PAFFF	6660-00-725-7917	RD88CTMQ5	80058	RECORDER,FREQUENCY	EA	1
1	22	PAFZZ	5310-00-014-5850	MS27183-42	96906	WASHER,FLAT	EA	4
1	23	XDFFF		C834ATMQ5	80058	CONTROL PANEL	EA	1

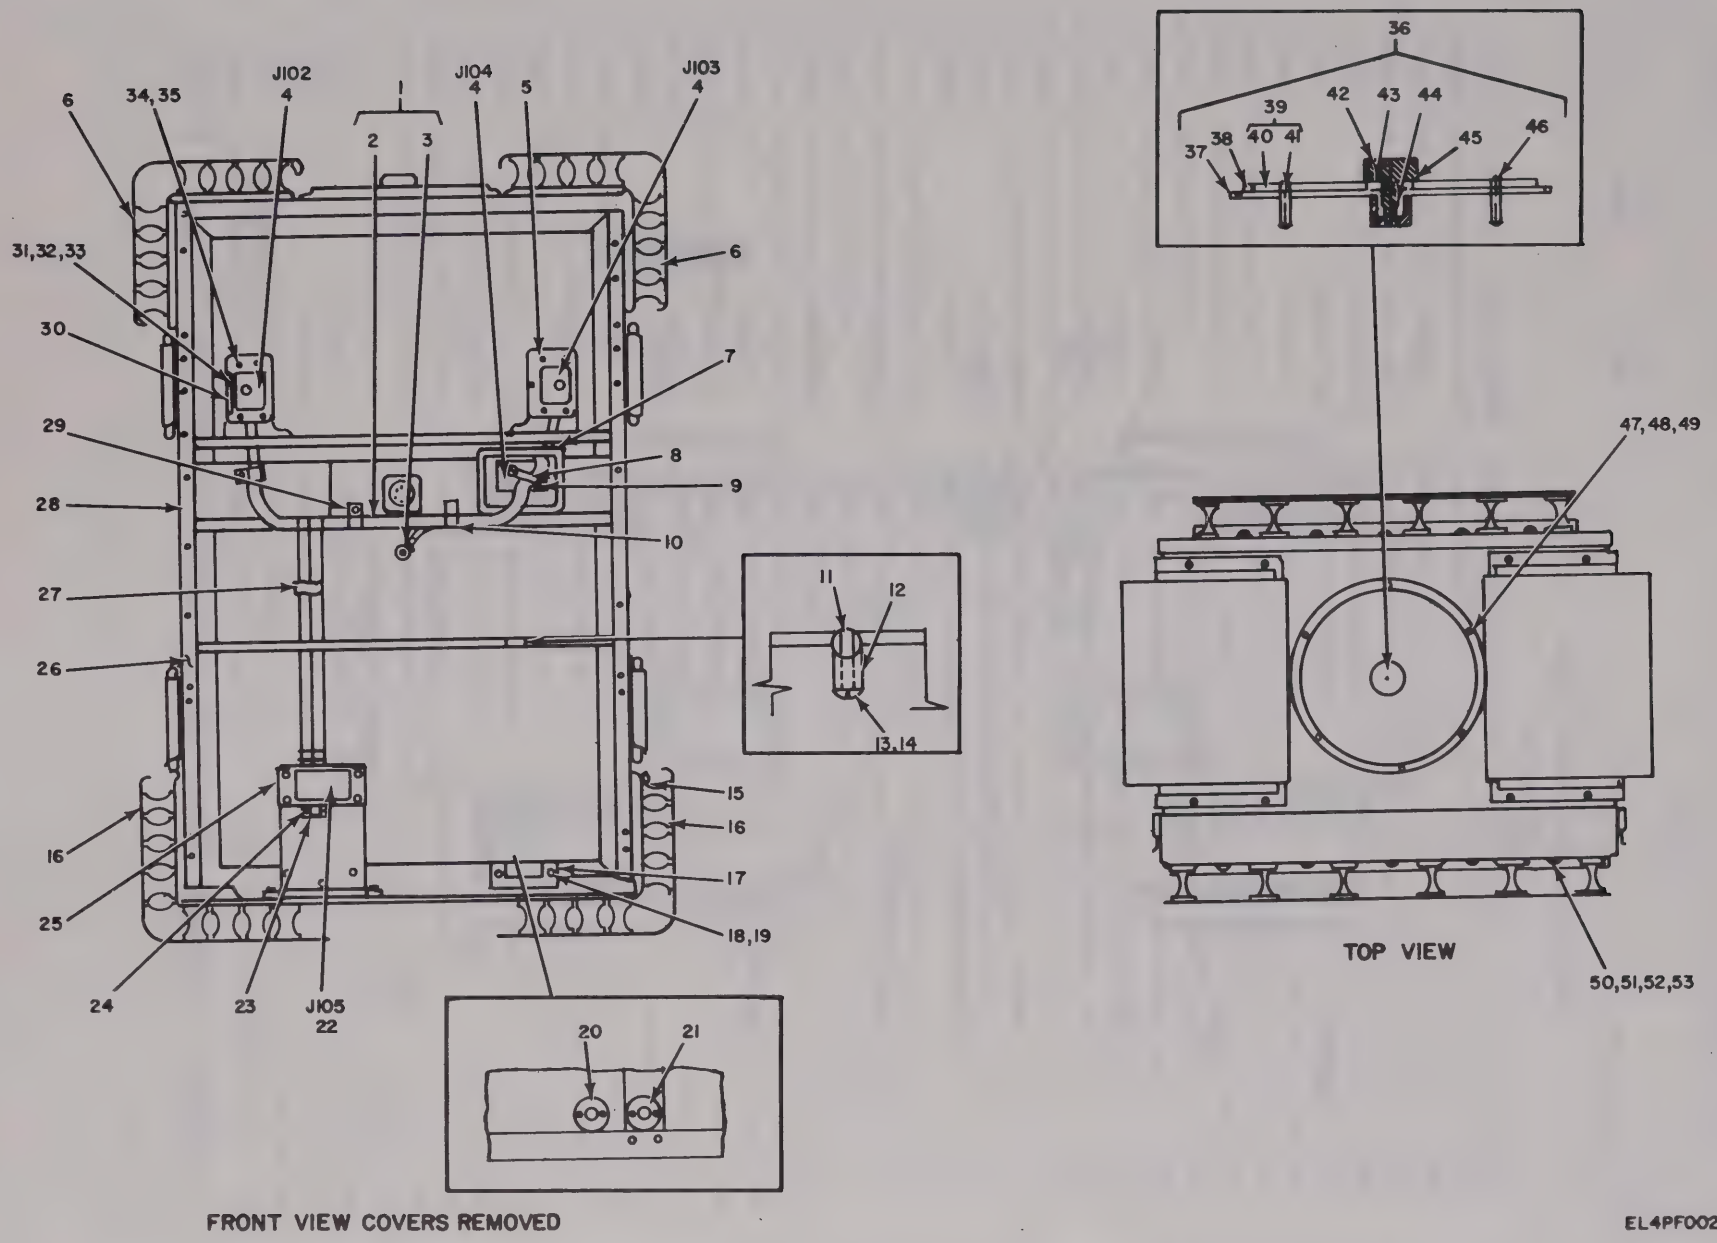

Figure 2. Cabinet, Electrical Equipment CY-1390A/TMQ-5 (Sheet 1 of 2).

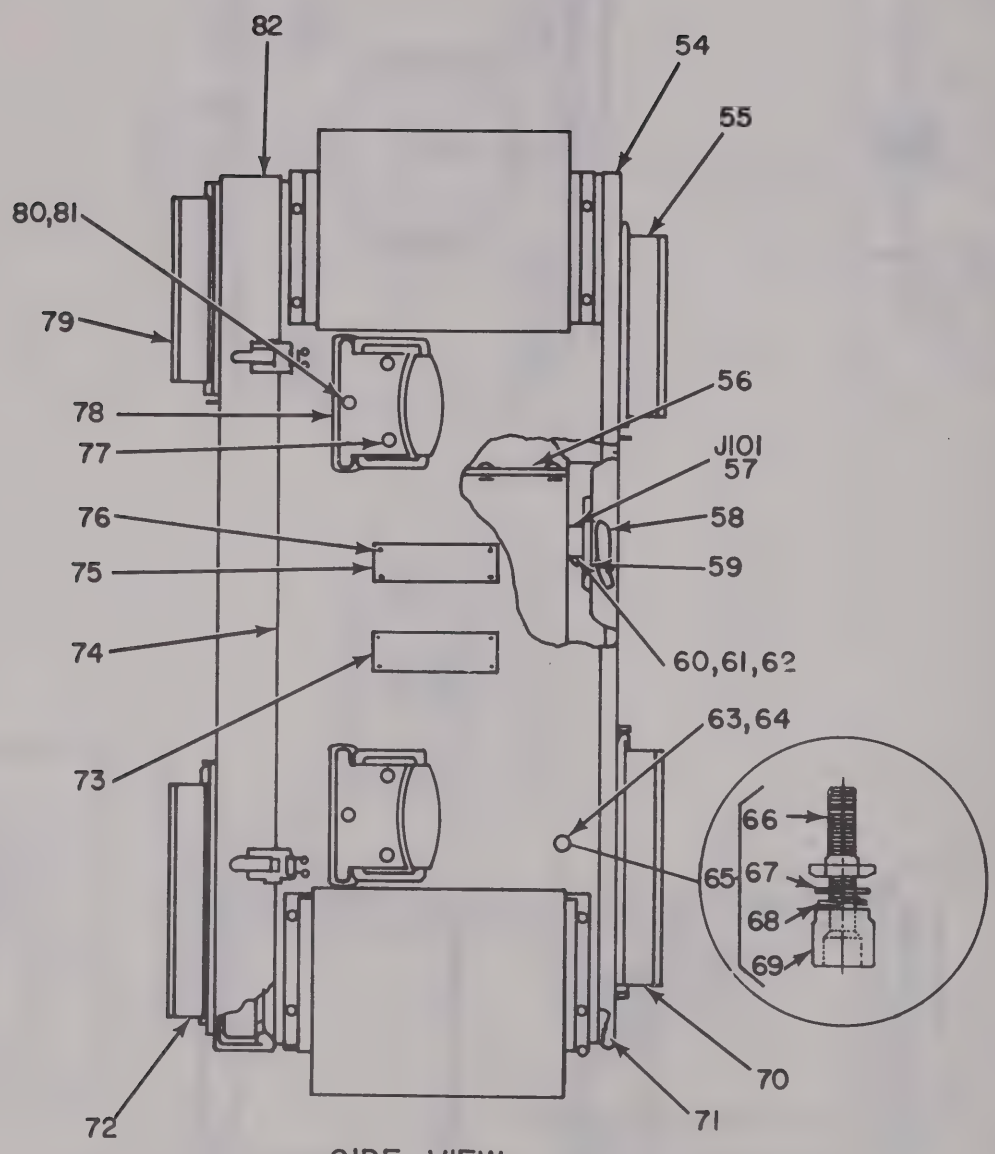

Figure 2. Cabinet, Electrical Equipment CY-1390A/TMQ-5 (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 01 CABINET, ELECTRICAL EQUIPMENT		
						CY-1390A/TMQ-5		
2	1	XDFFO		SCD125713	80063	WIRING ASSEMBLY	EA	1
2	2	PAFFF	5995-00-456-1743	SC-D-125741	80063	CABLE ASSEMBLY	EA	1
2	3	PAOZZ	5975-00-437-6719	SCB125125	80063	FERRULE	EA	2
2	4	PAFZZ	5935-00-173-5906	DP8814-33S	71468	CONNECTOR	EA	2
2	5	XDFZZ		SCC125708-2	80063	BRACKET,MOUNTING	EA	1
2	6	XDOFF		SCC125705GR1	80063	VIBRATION MOUNT	EA	2
2	7	XDFZZ		SCC125714	80063	BRACKET,MOUNTING	EA	1
2	8	PAFZZ	5340-00-200-5463	1068	71785	CLAMP	EA	1
2	9	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	3
2	10	PAFZZ	5340-00-197-8812	1069	71785	CLAMP	EA	3
2	11	PAOZZ	5330-00-492-2244	15137	82205	GASKET,RUBBER	EA	4
2	12	XDOZZ		SCB125716	80063	STRIP	EA	2
2	13	PAOZZ	5305-00-984-6195	MS35206-247	96906	SCREW,MACHINE	EA	4
2	14	PAOZZ	5310-00-559-0070	MS35333-38	96906	WASHER,LOCK	EA	4
2	15	PAOZZ	5305-00-984-6197	MS35206-249	96906	SCREW,MACHINE	EA	12
2	16	XDOFF		SCC125705GR2	80063	VIBRATION MOUNT	EA	2
2	17	XDOZZ		SCB125715	80063	BRACKET,MOUNTING	EA	1
2	18	PAOZZ	5305-00-984-7341	MS35191-273	96906	SCREW,MACHINE	EA	11
2	19	PAOZZ	5310-00-809-8546	MS27183-8	96906	WASHER,FLAT	EA	2
2	20	PAFZZ	5120-00-281-3887	SH17	72653	STRAIGHTENER	EA	1
2	21	PAFZZ	5120-00-159-8489	SCD125701-14	80063	STRAIGHTENER	EA	1
2	22	PAFZZ	5935-00-259-4102	DP888-33S	71468	CONNECTOR	EA	1
2	23	XDFZZ		SCB125712	80063	PLATE,MOUNTING	EA	1
2	24	PAFZZ	5305-00-889-3000	MS35206-230	96906	SCREW,MACHINE	EA	4
2	25	XDFZZ		SCD125711	80063	BRACKET,MOUNTING	EA	1
2	26	XDOZZ		SMD374448	80063	FRAME,WELDED	EA	1
2	27	PAFZZ	5340-00-514-0112	1070	71785	CLAMP	EA	2
2	28	XDOFF		SCC125702	80063	FRAME ASSEMBLY	EA	1
2	29	PAFZZ	5305-00-958-5453	MS35190-236	96906	SCREW,MACHINE	EA	3
2	30	XDFZZ		SCC125708-1	80063	BRACKET,MOUNTING	EA	1
2	31	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	31
2	32	PAFZZ	5310-00-045-3296	MS35338-43	96906	WASHER,LOCK	EA	31
2	33	PAFZZ	5305-00-989-7435	MS35207-264	96906	SCREW,MACHINE	EA	8
2	34	PAFZZ	5305-00-206-5281	SCB125709	80063	SCREW,MACHINE	EA	16
2	35	XDFZZ		1029S4	96906	NUT,SELF-LOCKING	EA	16
2	36	XDOFF		SCC125707	80063	AIR VENT ASSEMBLY	EA	1
2	37	PAOZZ	6660-00-392-9616	SCC125734	80063	AIR VENT	EA	1
2	38	PAOZZ	5330-00-297-5286	SCC125731	80063	GASKET	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	39	XDOFF		SCC125738	80063	CAP ASSEMBLY	EA	1
2	40	XDOZZ		SCC125739	80063	CAP	EA	1
2	41	XDOZZ		SCB125740	80063	POST,GUIDE	EA	3
2	42	XDOZZ		SCB125732	80063	SCREW,THUMB	EA	1
2	43	XDOZZ		MS16624-2087	96906	RING,RETAINING	EA	1
2	44	PAOZZ	5360-00-376-9560	SCB125733	80063	SPRING	EA	1
2	45	PAOZZ	5330-00-611-7522	143	76281	GASKET,FIBRE	EA	1
2	46	XDOZZ		MS16624-2025	96906	RING,RETAINING	EA	3
2	47	PAOZZ	5305-00-059-4553	MS35190-238	96906	SCREW,MACHINE	EA	6
2	48	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	16
2	49	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	16
2	50	PAOZZ	5305-00-984-6194	MS35206-246	96906	SCREW,MACHINE	EA	64
2	51	PAOZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	72
2	52	PAOZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	76
2	53	PAOZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	60
2	54	XDOFF		SCD125704	80063	REAR COVER ASSEMBLY	EA	1
2	55	XDOFF		SCC125706GR3	80063	VIBRATION MOUNT	EA	1
2	56	PAFZZ	5940-00-057-2805	213	79963	TERMINAL,LUG	EA	1
2	57	XDFZZ		AN3102A20-7P	81349	CONNECTOR	EA	1
2	58	PAFZZ	5935-00-636-5983	2209-7	71468	CAP,DUST	EA	1
2	59	PAFZZ	5310-00-298-6545	SCB125710	80063	GASKET	EA	2
2	60	PAFZZ	5305-00-889-2998	MS35206-216	96906	SCREW,MACHINE	EA	4
2	61	PAFZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	4
2	62	PAFZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	4
2	63	PAFZZ	5310-00-582-5965	MS35338-44	96906	WASHER,LOCK	EA	1
2	64	PAFZZ	5310-00-826-5217	MS35690-4010-401	96906	NUT,PLAIN,HEXAGON	EA	1
2	65	XDFFF		SMB133934	80063	STUD ASSY,GROUNDING	EA	1
2	66	XDFZZ		SMB133935	80063	STUD,GROUNDING	EA	1
2	67	PAFZZ	5310-00-045-5210	MS15795-910	96906	WASHER,FLAT	EA	1
2	68	PAFZZ	5310-00-184-8970	MS35338-101	96906	WASHER,LOCK	EA	1
2	69	PAFZZ	5310-00-765-2194	SMB133936	80063	NUT,THUMB	EA	1
2	70	XDOFF		SCC125706GR4	80063	VIBRATION MOUNT	EA	1
2	71	XDFZZ		X207	70485	GASKET	EA	10
2	72	XDOFF		SCC125706GR2	80063	VIBRATION MOUNT	EA	1
2	73	XDOZZ		SMC133951	80063	PLAT	EA	1
2	74	XDOZZ		SMD374449	80063	COVER	EA	1
2	75	XDOZZ		SMC145653	80063	PLAT	EA	1
2	76	PAOZZ	5305-00-253-5607	MS21318-8	96906	SCREW,DRIVE	EA	8
2	77	PAOZZ	5305-00-957-2635	MS35191-277	96906	SCREW,MACHINE	EA	4
2	78	XDOZZ		SS12168	57068	HANDLE,CHEST	EA	4

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
2	79	XBOFF		SCC125706GR1	80063	VIBRATION MOUNT	EA	1
2	80	PAOZZ	5305-00-984-7343	MS35191-276	96906	SCREW,MACHINE	EA	8
2	81	PAFZZ	5310-00-045-5202	MS15795-903	96906	WASHER,FLAT	EA	4
2	82	XBOFF		SCD125703	80063	FRONT COVER	EA	1

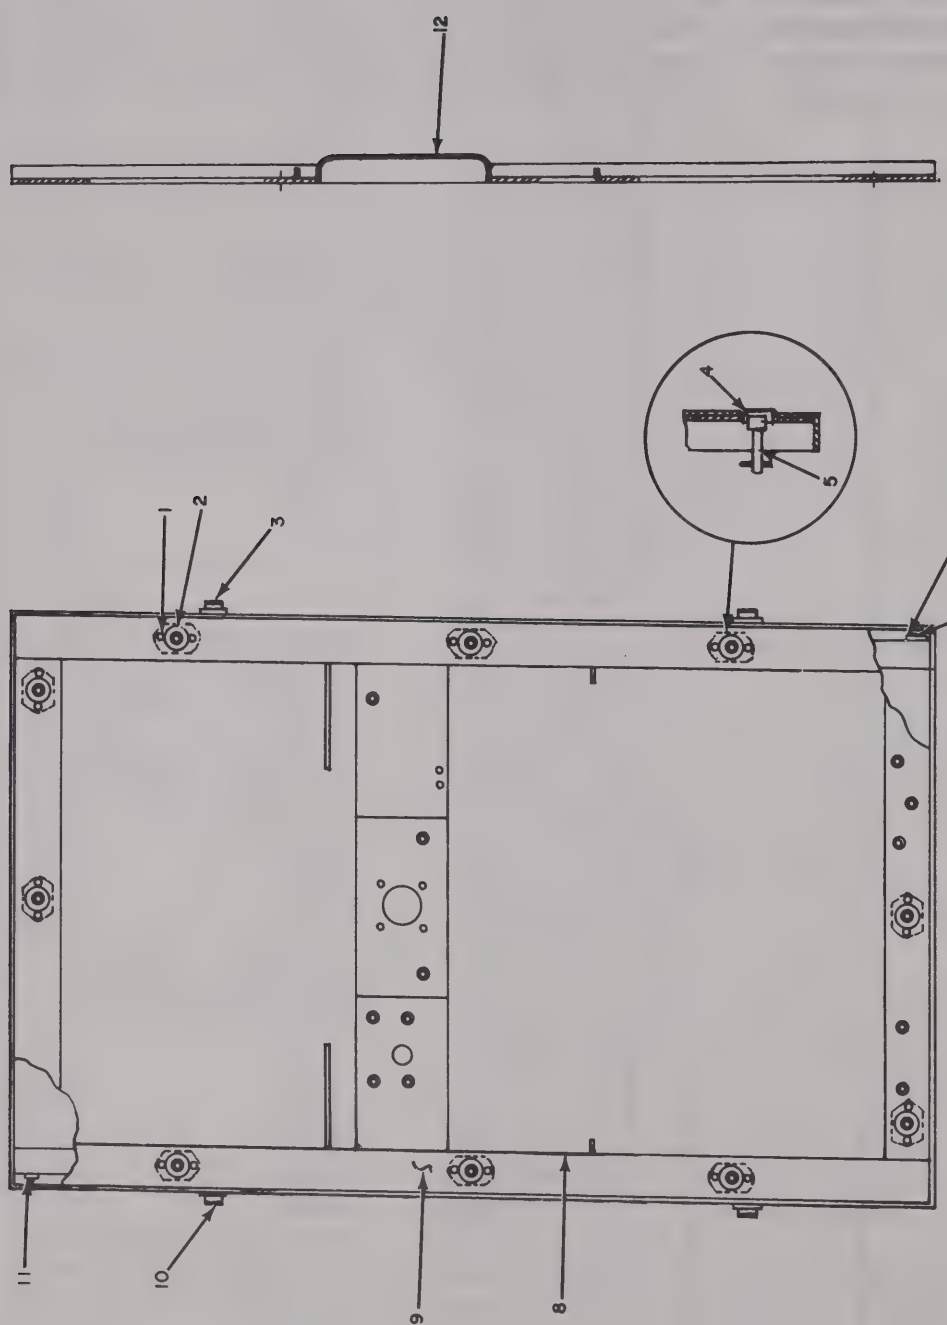

Figure 3. Cabinet, Electrical Equipment CY-1390A/TMQ-5, Rear Cover and Frame Assemblies.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
3	1	PAFZZ	5320-00-855-0842	MS16536-33	96906	RIVET	EA	24
3	2	XDOZZ		244-16	71286	FASTENER	EA	12
3	3	PAOZZ	5340-00-860-1088	SCD20650-30	80063	CATCH,TOP	EA	4
3	4	PAFZZ	5325-00-806-8448	4002P3187	71286	GROMMET	EA	12
3	5	XDOZZ		4002-14	71286	STUD ASSEMBLY	EA	12
3	6	XDOZZ		SMB374455	80063	STRIP,FLOWER	EA	1
3	7	PAFZZ	5320-00-055-3209	38-504-07-13	94222	RIVET	EA	10
3	8	XDOZZ		SMD374464	80063	COVER	EA	1
3	9	XDOZZ		SMD374461	80063	FRAME ASSEMBLY	EA	1
3	10	PAFZZ	5320-00-117-7294	MS20426D4-6	96906	RIVET	EA	32
3	11	XDOZZ		SMB374454	80063	STRIP,RUBBER	EA	1
3	12	XDOZZ		SCC125720	80063	COVER,CONNECTOR	EA	1

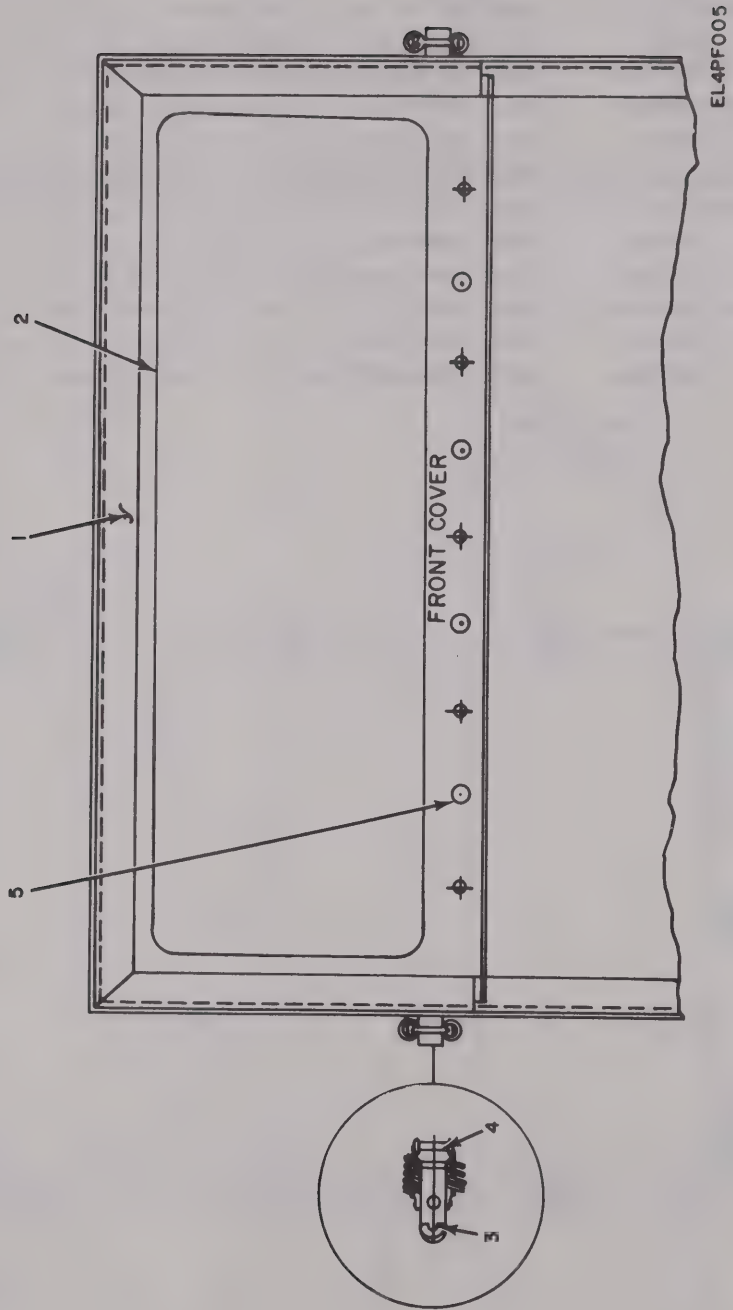

Figure 4. Cabinet, Electrical Equipment CY-1390A/TMQ-5, Front Cover Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
4	1	XDOZZ		SMD374456	80063	FRAME ASSEMBLY	EA	1
4	2	XDOZZ		SM0374457	80063	COVER	EA	1
4	3	XDFZZ		MS2047004-8	96906	RIVET	EA	16
4	4	PAFZZ	5340-00-205-5159	SCD20648	80063	CATCH	EA	4
4	5	PAFZZ	5320-00-855-0842	MS16536-33	96906	RIVET	EA	39

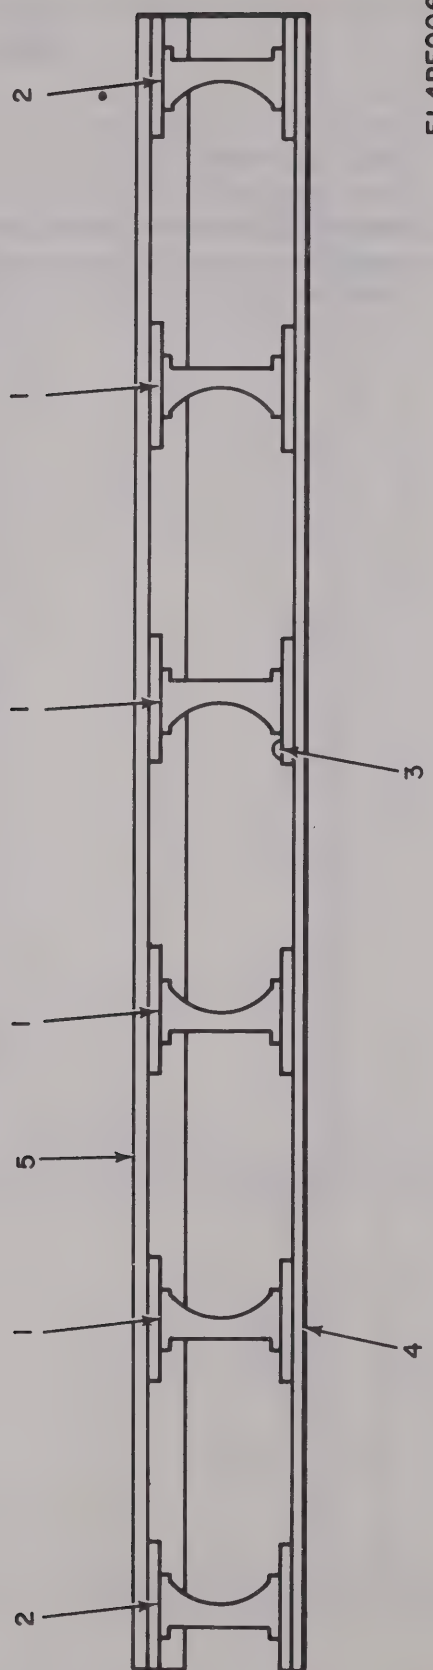

Figure 5. Cabinet, Electrical Equipment CY-1390A/TMQ-5, Vibration Mount Assemblies SCC125706GRPI through GRPIV.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
5	1	XDOZZ		SCC125724-1	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNTS SCC125706GRI AND SCC125706GRIII.....	EA	4
5	1	XDOZZ		SCC125724-2	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNTS SCC125706GRII AND SCC125706GRIV.....	EA	4
5	2	XDOZZ		SCC125724-4	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNT SCC125706GRI.....	EA	2
5	2	XDOZZ		SCC125724-6	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNT SCC125706GRII.....	EA	2
5	2	XDOZZ		SCC125724-5	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNT SCC125706GRIII.....	EA	2
5	2	XDOZZ		SCC125724-7	80063	MOUNT,VIBRATION USED ON VIBRATION MOUNT SCC125706GRIV.....	EA	2
5	3	PAFZZ	5320-00-117-7294	MS20426D4-6	96906	RIVET,SOLID.....	EA	48
5	4	XDOZZ		SCC125729-1	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125706GR1.....	EA	1
5	4	XDOZZ		SCC125729-2	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125706GRII.....	EA	1
5	4	XDOZZ		SCC125730-1	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125706GRIII.....	EA	1
5	4	XDOZZ		SCC125730-2	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125706GRIV.....	EA	1
5	5	XDOZZ		SCC125725	80063	PLATE,INNER USED ON VIBRATION MOUNT SCC125706GRI.....	EA	1
5	5	XDOZZ		SCC125726	80063	PLATE,INNER USED ON VIBRATION MOUNT SCC125706GRII.....	EA	1
5	5	XDOZZ		SCC125727	80063	PLATE,INNER USED ON VIBRATION MOUNT SCC125706GRIII.....	EA	1
5	5	XDOZZ		SCC125728	80063	PLATE,INNER USED ON VIBRATION MOUNT SCC125706GRIV.....	EA	1

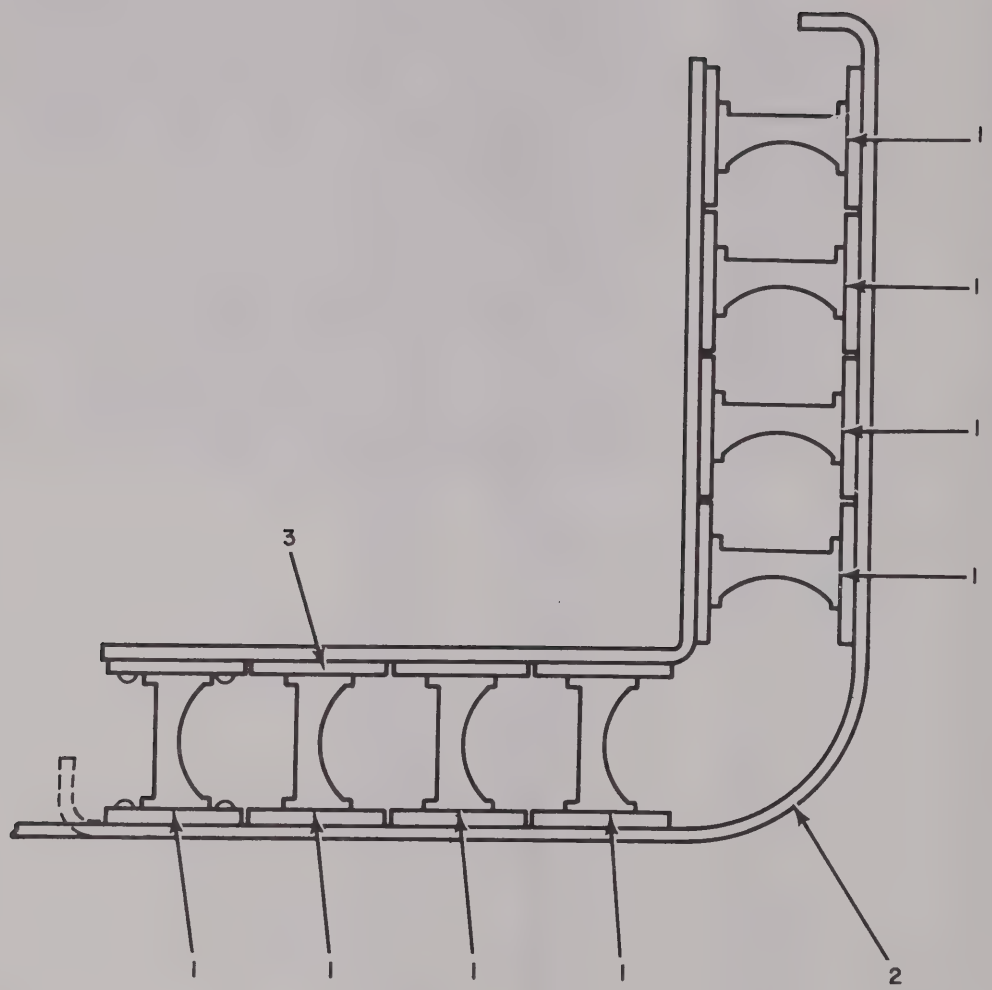

Figure 6. Cabinet, Electrical Equipment CY-1390A/TMQ-5, Vibration Mount Assemblies SCC125705GRPI and GRPII.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
6	1	XDOZZ		SCC125724-3	80063	MOUNT,VIBRATION	EA	8
6	2	XDOZZ		SCD125722	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125705GRI	EA	1
6	2	XDOZZ		SCD125721	80063	PLATE,OUTER USED ON VIBRATION MOUNT SCC125705GRII	EA	1
6	3	XDOZZ		SCD125723	80063	PLATE,INNER	EA	1

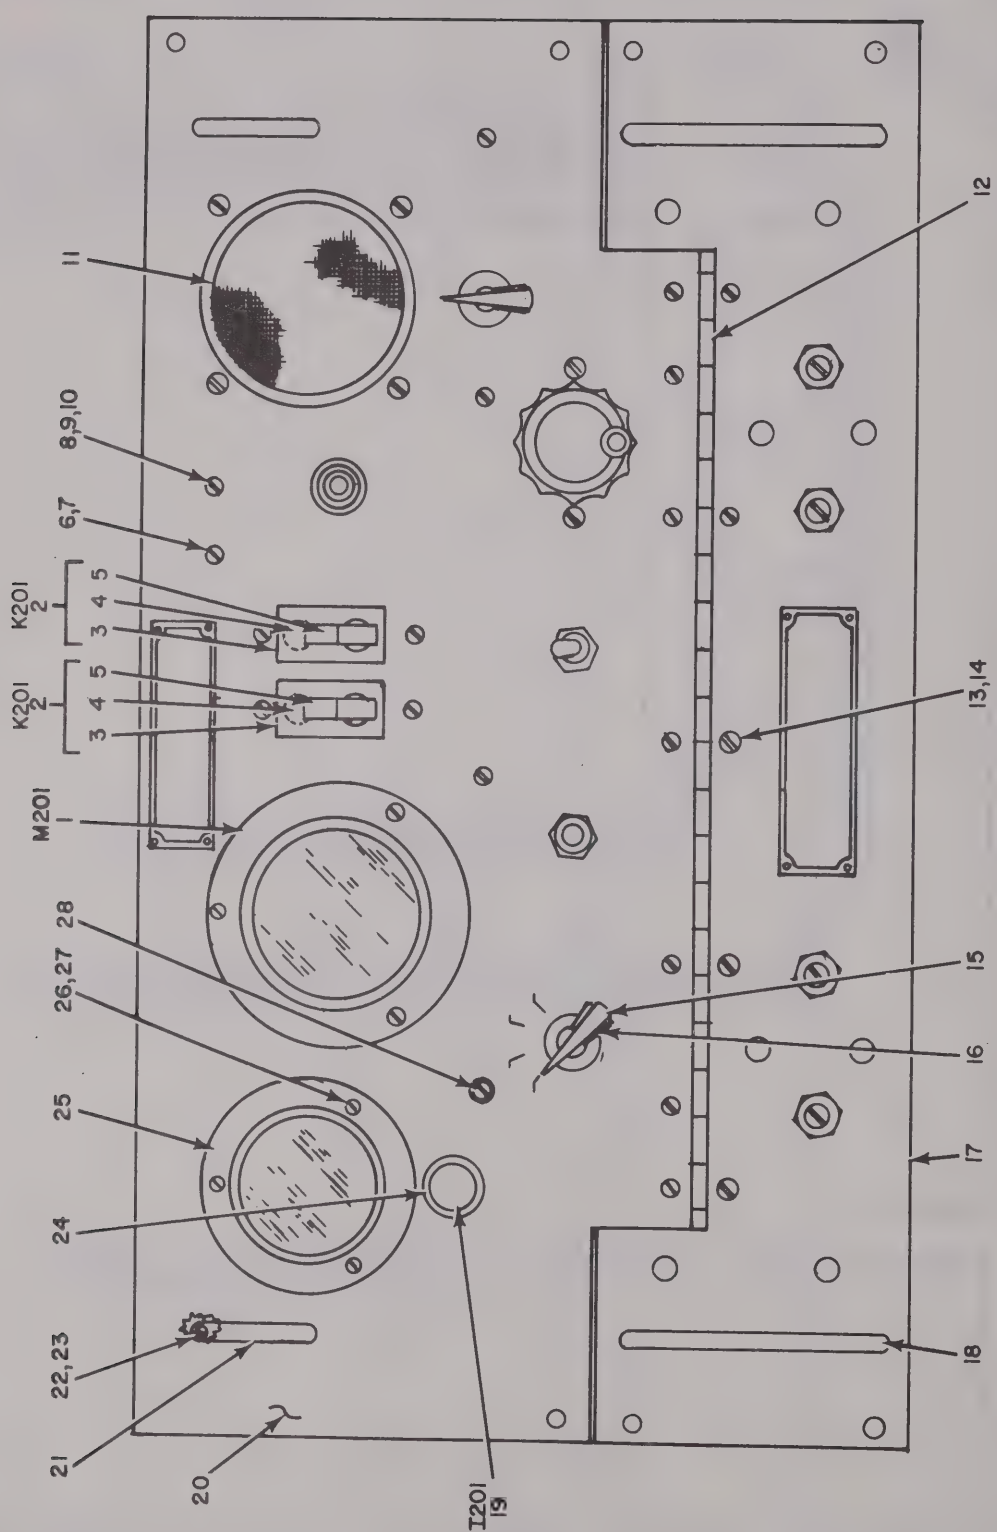

Figure 7. Panel, Control C-834A/TMQ-5 (Sheet 1 of 3).

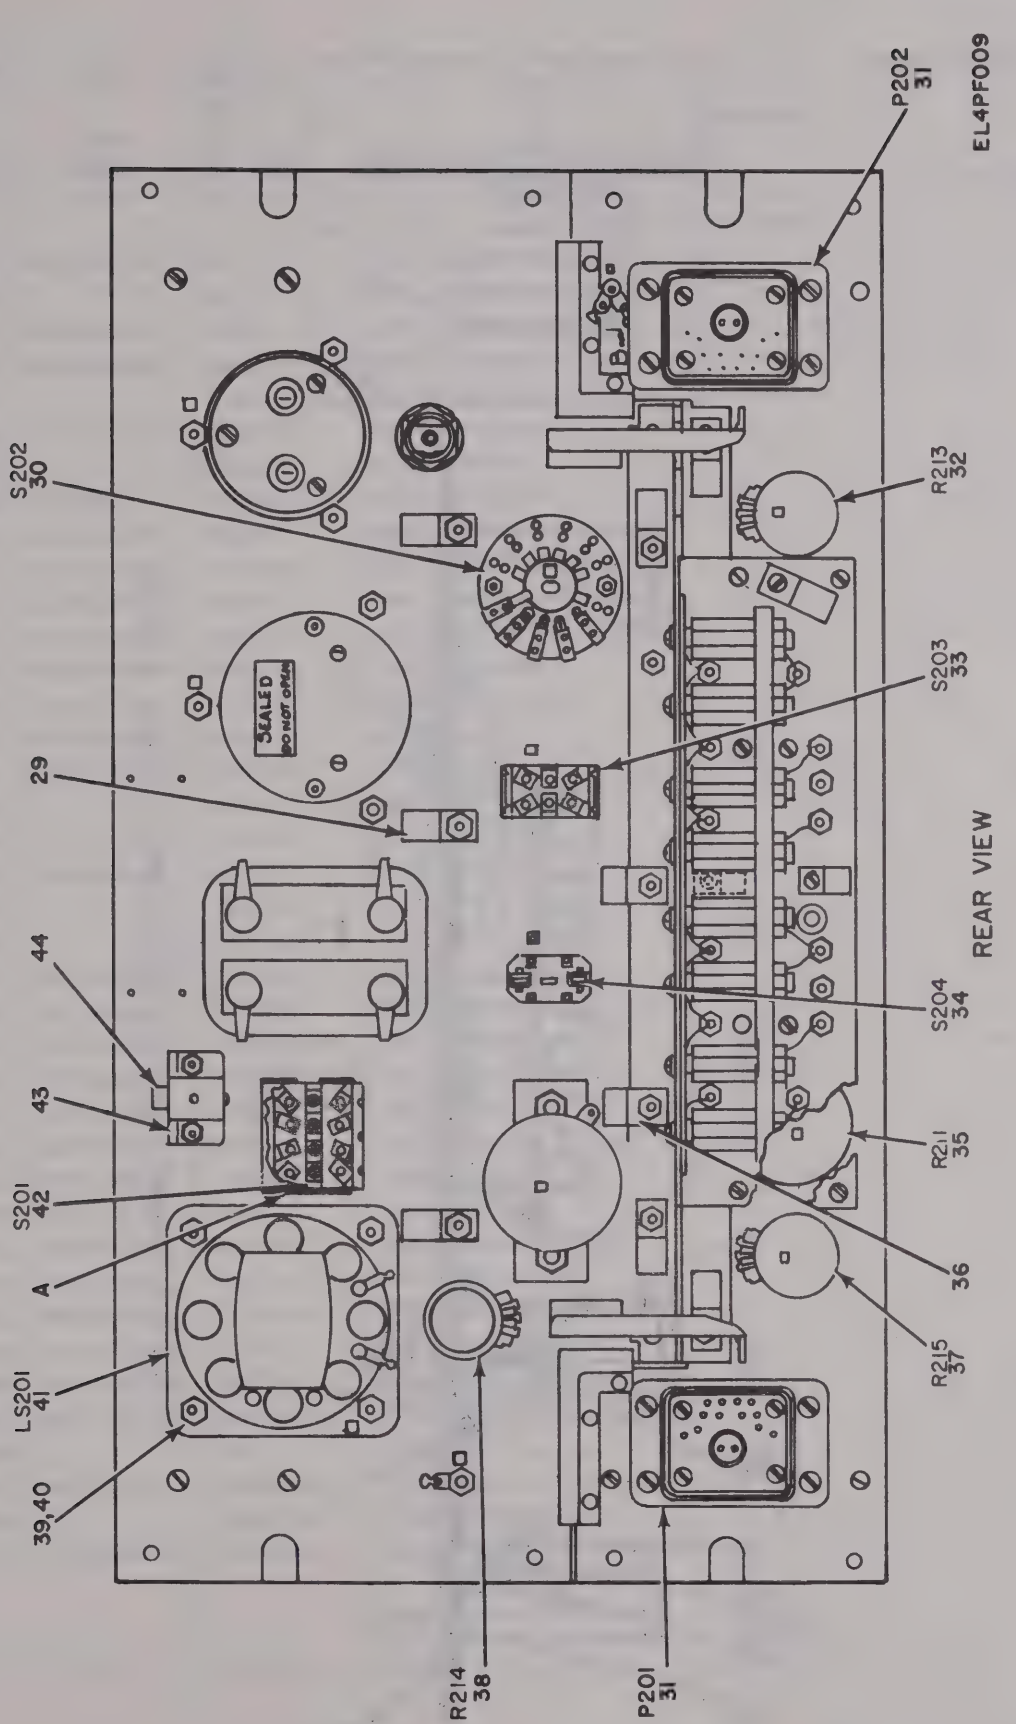

Figure 7. Panel, Control C-834A/TMQ-5 (Sheet 2 of 3).

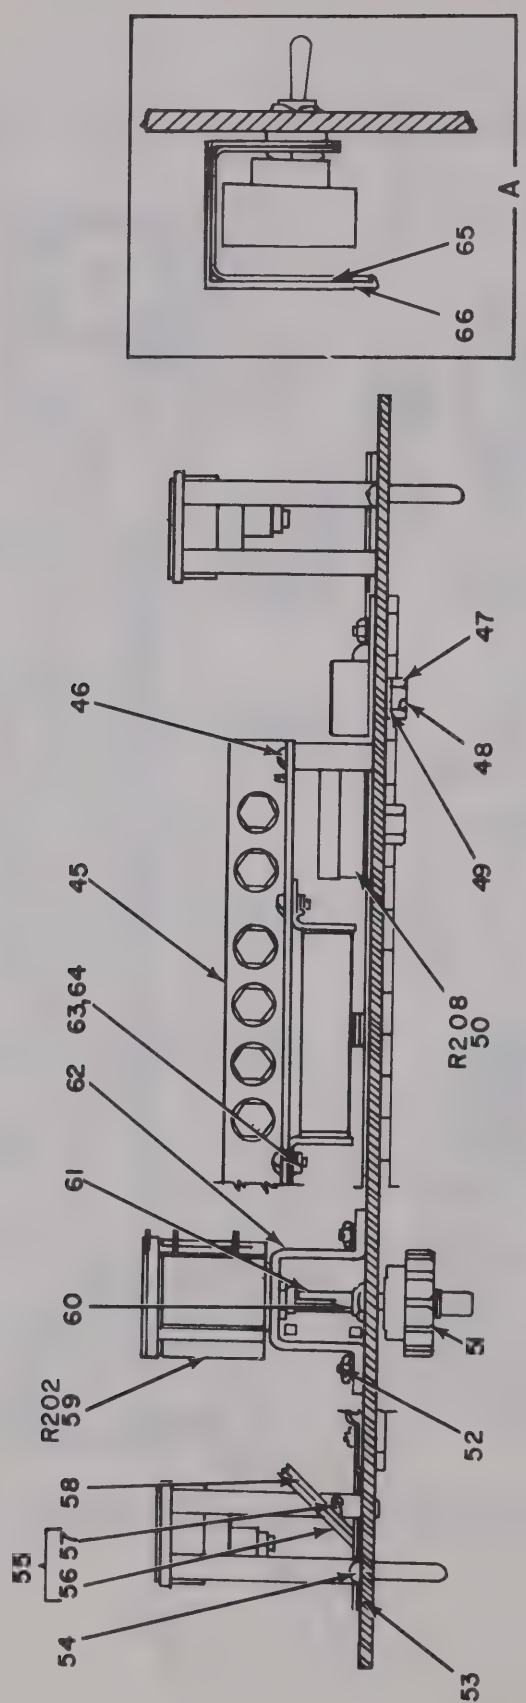

Figure 7. Panel, Control C-834A/TMQ-5 (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 02 PANEL, CONTROL C-834A/TMQ-5		
7	1	PAOZZ	6625-00-809-7334	369S	57737	FREQUENCY METER	EA	1
7	2	XDFFF		SMB125129	80063	CIRCUIT BREAKER	EA	2
7	3	PAFZZ	5930-00-987-8593	AM12-4	74193	CIRCUIT BREAKER	EA	2
7	4	PAFZZ	5940-00-050-7021	2118-10-10	78189	SOLDERING LUG	EA	4
7	5	XDFZZ		SCB125132	80063	CAP,INSULATOR	EA	2
7	6	PAOZZ	5305-00-984-4984	MS35206-227	96906	SCREW,MACHINE	EA	4
7	7	XDFZZ		MS35333-20	96906	WASHER,LOCK	EA	49
7	8	PAOZZ	5305-00-958-5457	MS35190-226	96906	SCREW,MACHINE	EA	2
7	9	PAOZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	2
7	10	PAOZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	5
7	11	PAOZZ	5965-00-377-0087	SCB125114	80063	GRILL	EA	1
7	12	PAFZZ	5340-00-209-7541	SCB125113	80063	HINGE,BUTT	EA	1
7	13	PAFZZ	5305-00-059-4553	MS35190-238	96906	SCREW,MACHINE	EA	31
7	14	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	53
7	15	PAOZZ	5355-00-160-7105	SCC34953	80063	KNOB	EA	2
7	16	PAOZZ	5305-00-899-3995	MS51029-29	96906	SETSCREW	EA	2
7	17	XDFZZ		SCD125102	80063	PANEL ASSEMBL	EA	1
7	18	XDOZZ		SCB125108-1	80063	HANDLE	EA	2
7	19	PAOZZ	6240-00-223-9100	NE51	81349	LAMP,GLOW	EA	1
7	20	XDFZZ		SMD125103	80063	PANEL ASSEMBLY,TOP	EA	1
7	21	XDOZZ		SCB125108-2	80063	HANDLE	EA	2
7	22	PAOZZ	5305-00-984-6193	MS35206-245	96906	SCREW,MACHINE	EA	8
7	23	PAFZZ	5310-00-559-0070	MS35333-21	96906	WASHER,LOCK	EA	14
7	24	PAFZZ	6210-00-053-8387	53-0408-0993-341	72619	LIGHT,INDICATOR	EA	1
7	25	PAOZZ	6625-00-668-9516	MR26W150ACVVR	81349	VOLTMETER	EA	1
7	26	PAOZZ	5305-00-984-4977	MS35206-220	96906	SCREW,MACHINE	EA	3
7	27	PAOZZ	5310-00-193-7577	MS35333-19	96906	WASHER,LOCK	EA	7
7	28	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	7
7	29	PAFZZ	5340-00-197-8812	1069	71785	CLAMP	EA	7
7	30	PAFZZ	5930-00-549-0280	SCA125107	80063	SWITCH,ROTARY	EA	1
7	31	PAFZZ	5935-00-283-7104	DPBB14-34P1G	71468	CONNECTOR	EA	2
7	32	PAFZZ	5905-00-518-5609	RV4LAYSA105A	81349	RESISTOR,VARIABLE	EA	1
7	33	PAFZZ	5930-00-615-9376	MS35059-21	96906	SWITCH,TOGGLE,ST52P	EA	1
7	34	PAFZZ	5935-00-655-1517	MS35058-26	96906	SWITCH,TOGGLE,ST42F	EA	1
7	35	PAFZZ	5905-00-702-1789	RA25NASA201AK	81349	RESISTOR,VARIABLE	EA	1
7	36	XDFZZ		1036	71785	CLAMP	EA	3
7	37	PAFZZ	5905-00-552-2093	RV4LAYSA254A	77764	RESISTOR,VARIABLE	EA	1
7	38	XDFZZ		RU4NAYFD103A	77764	RESISTOR,VARIABLE	EA	1
7	39	PAOZZ	5305-00-984-6194	MS35206-246	96906	SCREW,MACHINE	EA	4

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
7	40	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	6
7	41	PAOZZ	5965-00-678-6925	SCB125106	80063	SPEAKER	EA	1
7	42	PAFZZ	5930-00-615-7883	7663K5	15605	SWITCH,TOGGLE	EA	1
7	43	PAOZZ	5365-00-922-1692	SCB125123	80063	SPACER	EA	1
7	44	PAOZZ	5340-00-616-5067	61-332-7T	42689	CATCH	EA	1
7	45	XDFFF		SMC133900	80063	RESISTOR ASSEMBLY	EA	1
7	46	PAFZZ	5305-00-889-3002	MS35206-242	96906	SCREW	EA	4
7	47	XDFZZ		SCB125117	80063	RESISTOR MOUNTING	EA	4
7	48	PAFZZ	5330-00-580-2278	MS9021-010	96906	PACKING,PREFORMED	EA	4
7	49	PAFZZ	5310-00-820-3015	Z25	90201	WASHER,FLAT	EA	4
7	50	PAFZZ	5905-00-686-7667	RA25NASA101AK	81349	RESISTOR,VARIABLE	EA	1
7	51	PAOZZ	5355-00-472-9090	116-266-2	74970	KNOB	EA	1
7	52	PAFZZ	5305-00-958-5477	MS35190-254	96906	SCREW,MACHINE	EA	2
7	53	PAFZZ	5330-00-378-5329	SCB125115	80063	GASKET	EA	2
7	54	PAOZZ	5305-00-984-4993	MS35206-233	96906	SCREW,MACHINE	EA	3
7	55	XDFFD		SCD125118	80063	WIRING ASSEMBLY	EA	1
7	56	PAFZZ	5995-00-456-1297	SC-D-125138	80063	CABLE ASSEMBLY	EA	1
7	57	PAOZZ	5975-00-437-6719	SCB125125	80063	FERRULE	EA	2
7	58	PAFZZ	5995-00-456-1744	SMD125137	80063	CABLE ASSEMBLY	EA	1
7	59	XDFZZ		AR2KL5	73138	RESISTO	EA	1
7	60	PAFZZ	5365-00-036-8104	UB241	90201	BUSHING	EA	1
7	61	PAFZZ	6660-00-392-8224	SCB125109	80063	SHAFT	EA	1
7	62	XDFZZ		SCB125110	80063	BRACKET	EA	1
7	63	PAFZZ	5940-00-258-2359	2120-08-00	78189	TERMINAL,LUG	EA	3
7	64	PAOZZ	5310-00-082-1404	MS27183-6	96906	WASHER,FLAT	EA	2
7	65	XDFZZ		SCB125127	80063	PLATE,INSULATOR	EA	1
7	66	PAFZZ	6660-00-172-5768	SCB125128	80063	COVER	EA	1

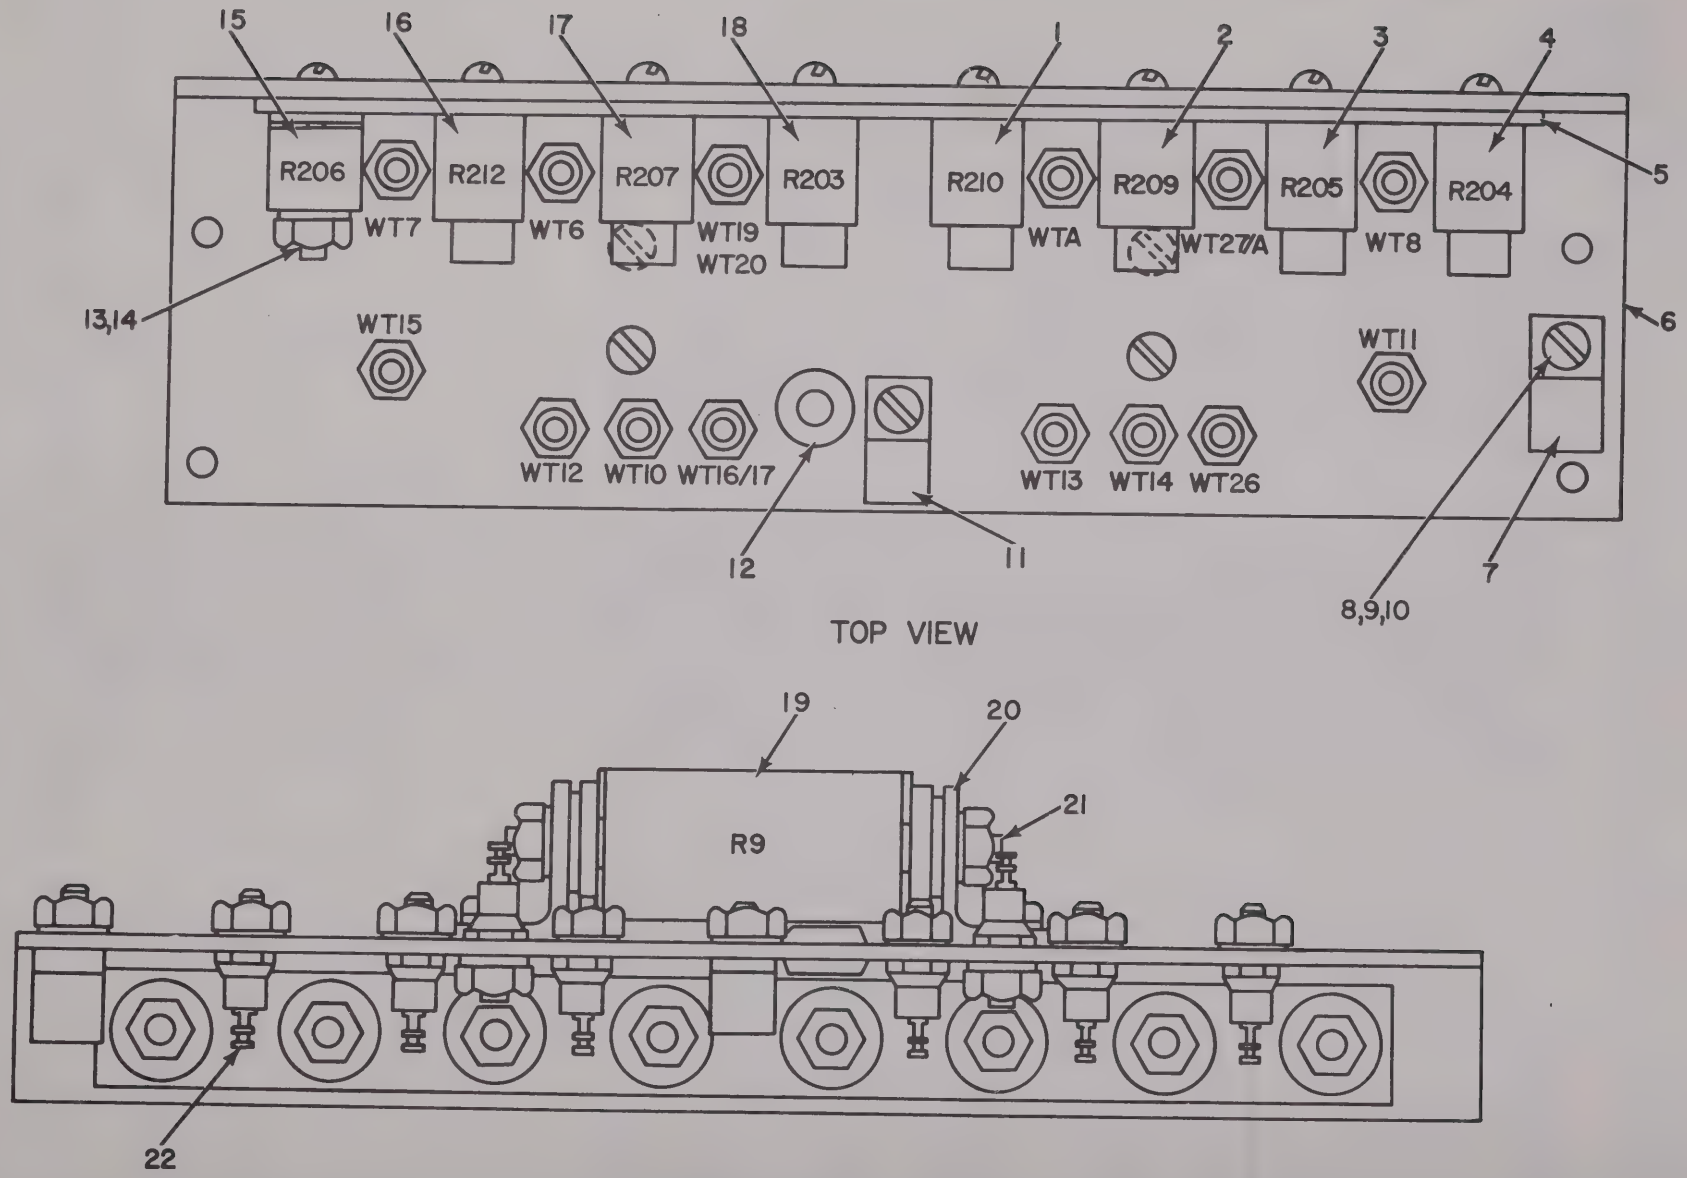

Figure 8. Panel, Control C-834A/TMQ-5, Resistor Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
8	1	PAFZZ	5905-00-815-3417	RB16CE150R0F	81349	RESISTOR,FXD,WW	EA	1
8	2	PAFZZ	5905-00-857-5542	RB16AE121R0F	81349	RESISTOR,FXD,WW	EA	1
8	3	PAFZZ	5905-00-857-6531	RB16CE28700F	81349	RESISTOR,FXD,WW	EA	1
8	4	PAFZZ	5905-00-857-6911	RB16CE10001F	81349	RESISTOR,FXD,WW	EA	1
8	5	PAFZZ	5970-00-307-9261	SMB133897	80063	PLATE,INSULATOR	EA	1
8	6	XDFZZ		SMC133893	80063	PLATE,MOUNTING	EA	1
8	7	PAFZZ	5340-00-197-8812	1069	71785	CLAMP	EA	8
8	8	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	6
8	9	XDFZZ		MS35333-20	96906	WASHER,LOCK	EA	1
8	10	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	1
8	11	PAFZZ	5340-00-200-5463	1068	71785	CLAMP	EA	1
8	12	PAFZZ	5325-00-174-5317	AN931-3-5	81349	GROMMET	EA	1
8	13	PAFZZ	5305-00-984-6222	MS35206-235	96906	SCREW,MACHINE	EA	7
8	14	PAFZZ	5310-00-763-0280	SMB133896	80063	WASHER	EA	9
8	15	PAFZZ	5905-00-857-6514	RB16CE24900F	81349	RESISTOR,FXD,WW	EA	1
8	16	PAFZZ	5905-00-665-5364	RB16AE35600F	81349	RESISTOR,FXD,WW	EA	1
8	17	PAFZZ	5905-00-059-9871	RB16AE4R600F	81349	RESISTOR,FXD,WW	EA	1
8	18	XDFZZ		RB16AE385R0F	81349	RESISTOR,FXD,WW	EA	1
8	19	PAFZZ	5905-00-059-8104	RB19AE41702F	81349	RESISTOR,FXD,WW	EA	1
8	20	XDFZZ		SMB133895	80063	BRACKET	EA	2
8	21	XDFZZ		SMB133894	80063	ROD,TIE	EA	1
8	22	PAFZZ	5940-00-926-0037	1942-2-05	71279	TERMINAL,STUD	EA	14

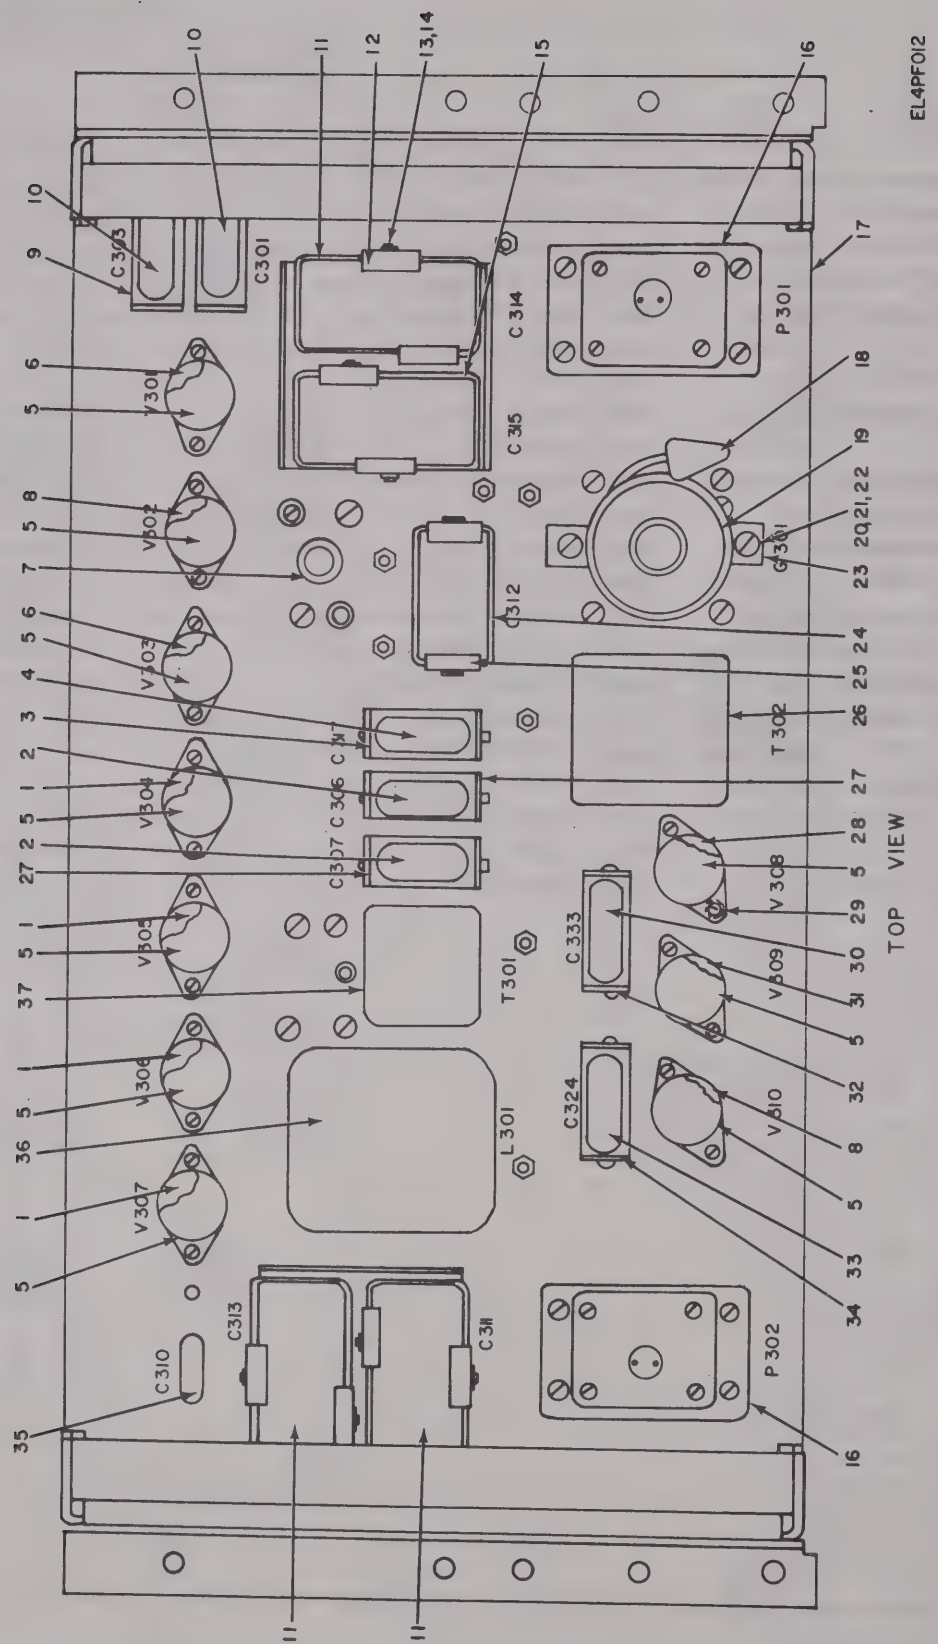

Figure 9. Converter, Signal Data CV-146A/TMQ-5 (Sheet 1 of 3).

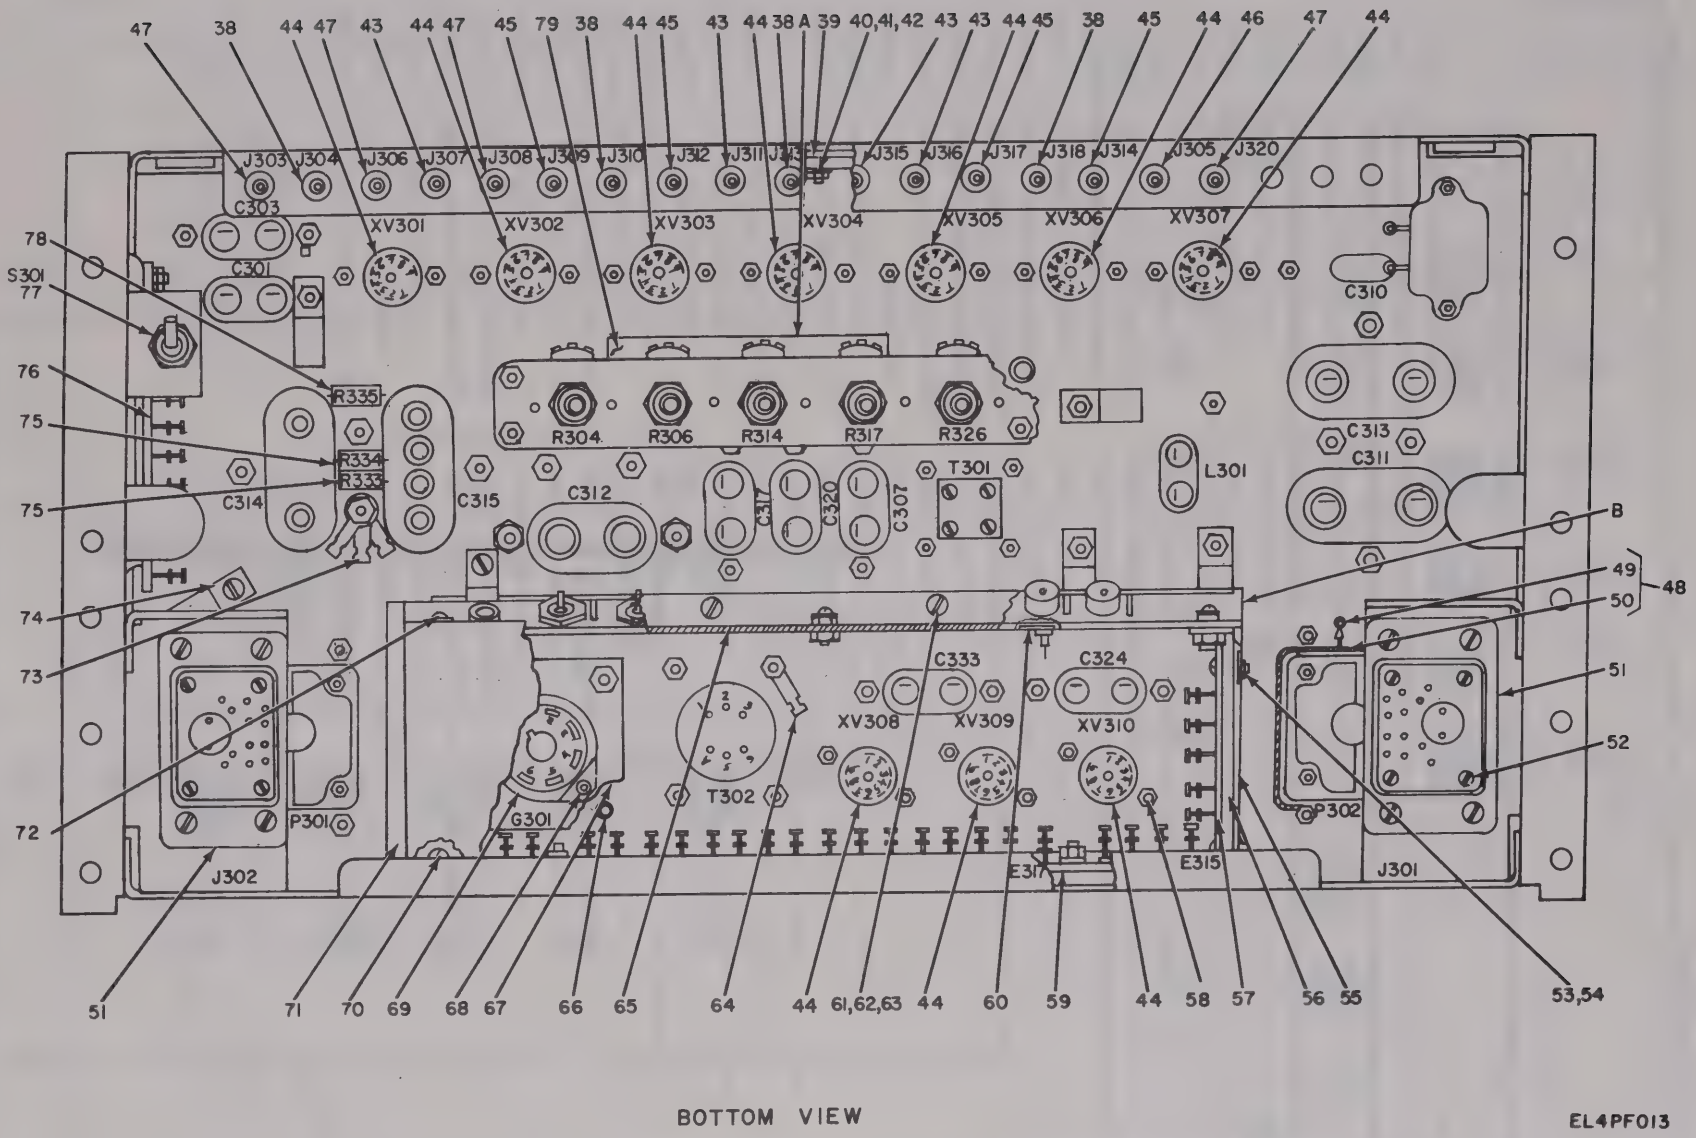

BOTTOM VIEW

EL4PF013

Figure 9. Converter, Signal Data CV-146A/TMQ-5 (Sheet 2 of 3).

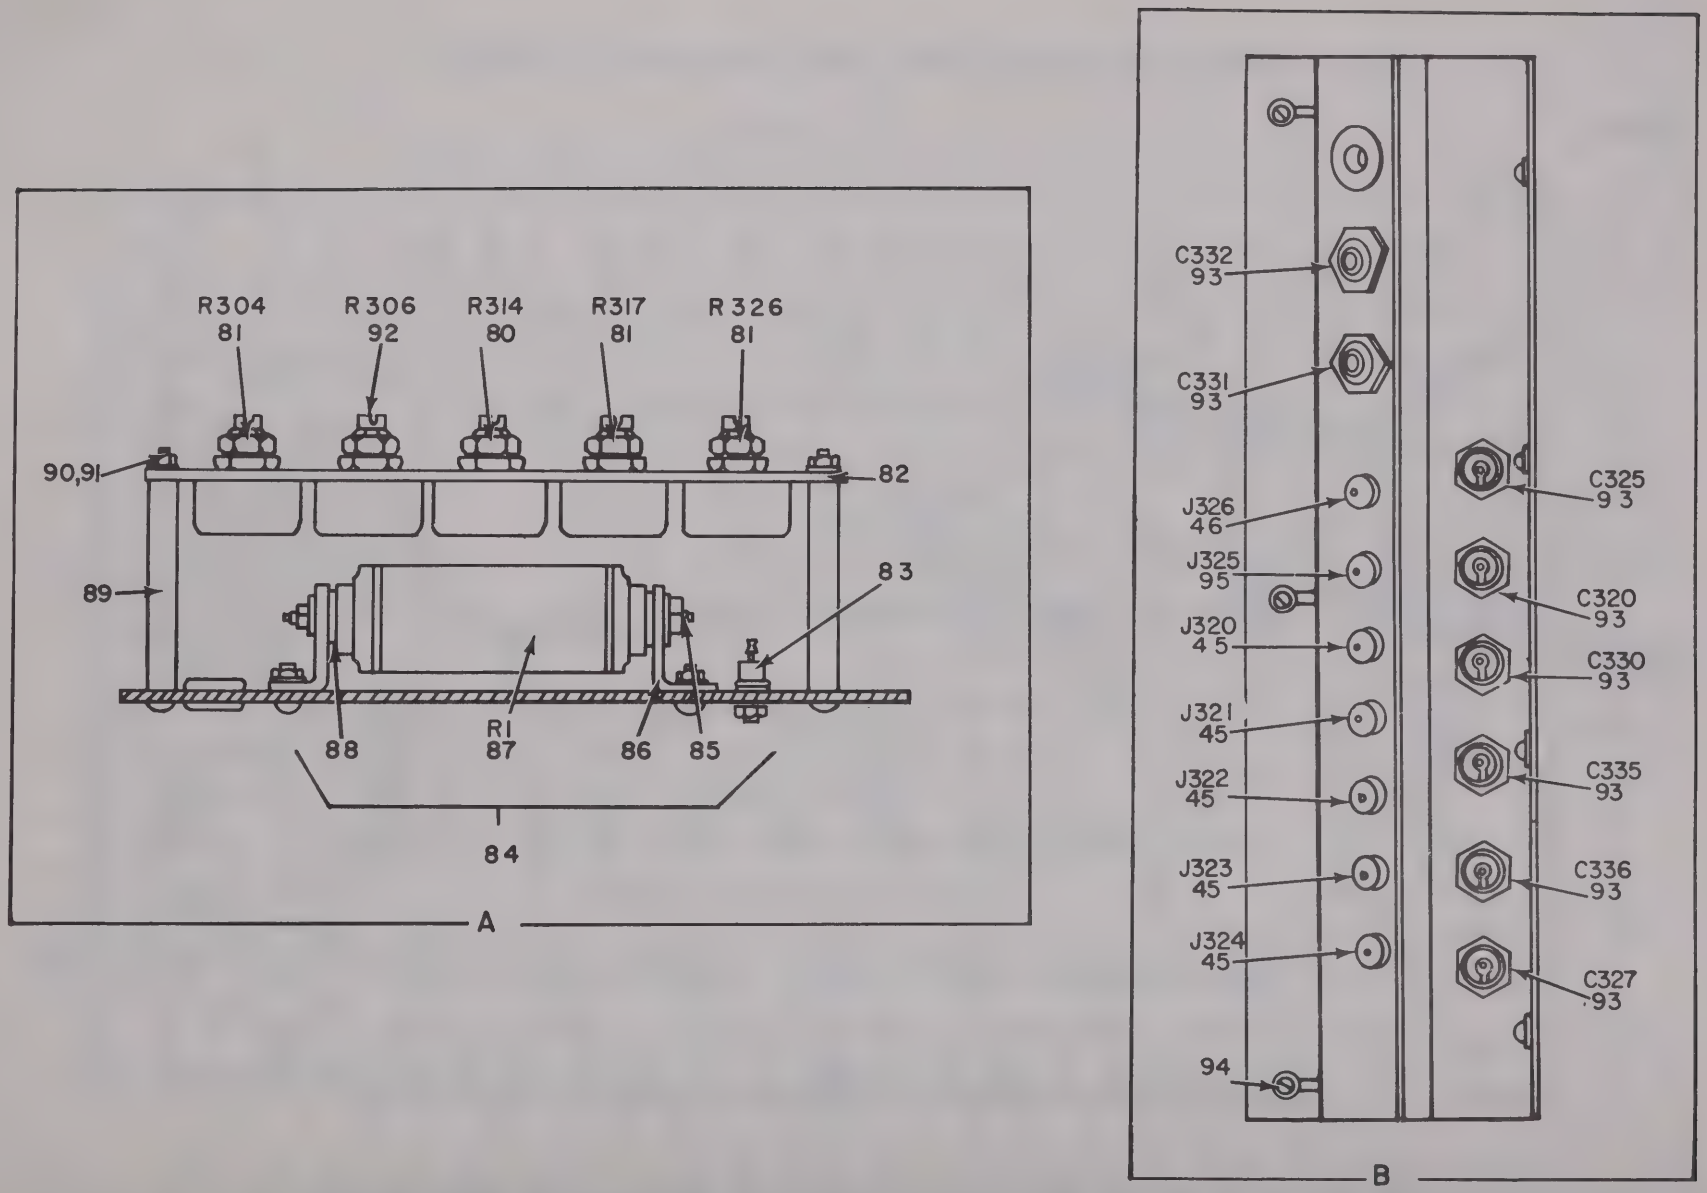

SECTIONS "A" AND "B"

EL4PF014

Figure 9. Converter, Signal Data CV-146A/TMQ-5 (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 03 CONVERTER,SIGNAL DATA		
						CV-146A/TMQ-5		
9	1	PAFZZ	5960-00-262-0167	12ATWA	95303	ELECTRON TUBE	EA	4
9	2	PAFZZ	5910-00-615-0340	CP61B1EF503K	81349	CAPACITOR,FXD,PAPER	EA	2
9	3	XDFZZ		CP06SA4	81349	BRACKET	EA	1
9	4	PAFZZ	5910-00-543-0772	CP61B1EF504K	81349	CAPACITOR,FXD,PAPER	EA	1
9	5	PAFZZ	5960-00-264-3004	TS109U02	80058	SHIELDED TUBE	EA	10
9	6	PAFZZ	5960-00-262-0210	5814A	95303	ELECTRON TUBE	EA	2
9	7	PAFZZ	5325-00-682-2168	72002	70485	GROMMET	EA	2
9	8	PAFZZ	5960-00-082-4139	5751	95303	ELECTRON TUBE	EA	2
9	9	XDFZZ		CP09183	00656	BRACKET	EA	2
9	10	PAFZZ	5910-00-581-0009	CP91BIEF254K1	81349	CAPACITOR,FXD,PAPER	EA	2
9	11	PAFZZ	5910-00-262-8532	SC8125337	80063	CAPACITOR,ELCTLT	EA	3
9	12	PAFZZ	5910-00-913-7445	CP07SB6	00656	BRACKET	EA	8
9	13	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	10
9	14	PAFZZ	5310-00-576-3752	MS35333-39	96906	WASHER,LOCK	EA	10
9	15	PAFZZ	5910-00-280-8195	SC-8-125338	80063	CAPACITOR,ELCTLT	EA	1
9	16	PAFZZ	5935-00-283-7104	DPB814-34P1G	71468	CONNECTOR	EA	2
9	17	XDFFO		SC0125303	80063	CHASSIS ASSEMBLY	EA	1
9	18	PAFZZ	5340-00-197-8812	1049	71785	CLAMP	EA	2
9	19	PAFZZ	6130-00-330-9728	SMD133906-4	80063	INVERTER,STD	EA	1
9	20	PAFZZ	5305-00-984-6196	MS35225-43	96906	SCREW,MACHINE	EA	2
9	21	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	6
9	22	PAFZZ	5310-00-559-0070	MS35333-38	96906	WASHER,LOCK	EA	6
9	23	PAFZZ	5960-00-264-9519	926E3	07387	CLAMP	EA	1
9	24	PAFZZ	5910-00-262-8533	SC8125340	80063	CAPACITOR,ELCTLT	EA	1
9	25	PAFZZ	5910-00-160-4918	CP07SA4	81349	BRACKET	EA	3
9	26	PAFZZ	5950-00-646-3108	SC8125333	80063	TRANSFORMER,AUDIO	EA	1
9	27	XDFZZ		C0091B1	00656	BRACKET	EA	2
9	28	PAFZZ	5960-00-475-4950	12AY7	95303	ELECTRON TUBE	EA	1
9	29	PAFZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	20
9	30	PAFZZ	5910-00-578-1368	CP61B1EF105K	81349	CAPACITOR,FXD,PAPER	EA	1
9	31	PAFZZ	5960-00-827-8782	12AX7	95303	ELECTRON TUBE	EA	1
9	32	XDFZZ		CP09186	00656	BRACKET	EA	1
9	33	PAFZZ	5910-00-825-1842	CP91BIEG104K	81349	CAPACITOR,FXD,PAPER	EA	1
9	34	XDFZZ		CP09182	00656	BRACKET	EA	1
9	35	PAFZZ	5910-00-264-8352	24-2-0-11	35529	CAPACITOR,FXD,MICA	EA	1
9	36	PAFZZ	5950-00-482-3060	SC8125335	80063	REACTOR,AUDIO	EA	1
9	37	PAFZZ	5950-00-518-1174	SC8125334	80063	TRANSFORMER,AUDIO	EA	1
9	38	PAFZZ	5935-00-257-7042	105607I	74970	CONNECTOR	EA	4

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	39	XDFFF		SMD125332	80063	TERMINAL BOARD	EA	1
9	40	PAFZZ	5305-00-984-4989	MS35206-229	96906	SCREW,MACHINE	EA	14
9	41	PAFZZ	5310-00-457-1541	15129	82205	WASHER,STEEL	EA	18
9	42	PAFZZ	5310-00-543-5060	MS35337-39	96906	WASHER,LOCK	EA	10
9	43	PAFZZ	5935-00-357-2938	105-609-1	74970	CONNECTOR	EA	4
9	44	PAFZZ	5935-00-812-4936	TS105P01	73690	SOCKET,TUBE	EA	10
9	45	PAFZZ	5935-00-549-9278	105-605-1	74970	CONNECTOR	EA	9
9	46	PAFZZ	5935-00-685-9396	105-601-1	74970	CONNECTOR	EA	2
9	47	PAFZZ	5935-00-257-7041	105-610-1	74970	CONNECTOR	EA	4
9	48	PAFFF	5995-00-456-1286	SC-D-125321	80063	CABLE ASSEMBLY	EA	1
9	49	PAFZZ	5975-00-437-6719	SCB125125	80063	FERRULE	EA	2
9	50	XDFZZ	6660-00-765-5419	SCB125342	80063	CABLE	FT	V
9	51	PAFZZ	5935-00-173-5906	DP8814-335	71468	CONNECTOR	EA	2
9	52	PAFZZ	5305-00-059-4553	MS35190-238	96906	SCREW,MACHINE	EA	16
9	53	PAFZZ	5310-00-056-8519	22NC2193-3-62	72962	NUT,CLINCH	EA	3
9	54	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	8
9	55	PAFZZ	6660-00-238-4367	SCB125322-1	80063	SHIELD,AMPLIFIER	EA	1
9	56	PAFZZ	5970-00-464-0443	SCB125324	80063	PLATE,INSULATOR	EA	1
9	57	XDFFF		SCC125330	80063	TERMINAL BOARD	EA	1
9	58	PAFZZ	5305-00-993-0190	MS35206-214	96906	SCREW,MACHINE	EA	20
9	59	XDFFF		SCD125329	80063	TERMINAL BOARD	EA	1
9	60	PAFZZ	5310-00-627-6128	MS35335-35	96906	WASHER,LOCK	EA	17
9	61	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	16
9	62	PAFZZ	5310-00-193-7577	MS35333-36	96906	WASHER,LOCK	EA	20
9	63	PAFZZ	5310-00-905-8451	MS20364-632	96906	NUT,PLAIN,HEXAGON	EA	16
9	64	PAFZZ	5940-00-258-2109	2120-06-00	78189	TERMINAL,LUG	EA	I
9	65	XDFZZ		SCD125302	80063	WIRING ASSEMBLY	EA	I
9	66	PAFZZ	5305-00-855-3249	NAS601-408	80205	SCREW,MACHINE	EA	4
9	67	XDFZZ		SCB125314	80063	PLATE	EA	I
9	68	PAFZZ	5305-00-984-4984	MS35206-227	96906	SCREW,MACHINE	EA	4
9	69	PAFZZ	5935-00-129-9358	TS101P02	80058	SOCKET,TUBE	EA	I
9	70	PAFZZ	6660-00-176-0098	SMC125310	80063	SCREW,MACHINE	EA	I
9	71	PAFZZ	6660-00-238-4366	SCB125322-2	80063	SHIELD,AMPLIFIER	EA	I
9	72	PAFZZ	5305-00-885-3000	MS35206-230	96906	SCREW	EA	I
9	73	PAFZZ	5940-00-050-7021	2118-10-10	78189	LUG,TERMINAL	EA	I
9	74	PAFZZ	5340-00-514-0112	1070	71785	CLAMP	EA	I
9	75	PAFZZ	5905-00-171-2009	RC20GF222K	81349	RESISTOR,FXD,CMPSN	EA	I
9	76	XDFFF		SCC125331	80063	TERMINAL BOARD	EA	I
9	77	PAFZZ	5930-00-108-6980	ST42D	04009	SWITCH,TOGGLE	EA	I
9	78	PAFZZ	5905-00-171-1985	RC20GF822K	81349	RESISTOR,FXD,CMPSN	EA	I

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
9	79	PAFZZ	6660-00-176-0088	SCC125311	80063	PLATE	EA	1
9	80	PAFZZ	5905-00-501-5814	RV4LAYSA503A	81349	RESISTOR,VARIABLE	EA	1
9	81	PAFZZ	5905-00-552-2093	RV4LAYSA254A	81349	RESISTOR,VARIABLE	EA	3
9	82	XDFZZ		SCB125312	80063	PLATE	EA	1
9	83	PAFZZ	5940-00-926-0037	1942-2-05	71279	TERMINAL,STUD	EA	3
9	84	XDFFF		SMB133901	80063	RESISTOR ASSEMBLY	EA	1
9	85	XDFZZ		SMB133894	80063	ROD,TIE	EA	1
9	86	XDFZZ		SMB133892	80063	BRACKET	EA	2
9	87	PAFZZ	5905-00-857-5527	RB19CE10002F	81349	RESISTOR,FXD,WW	EA	1
9	88	PAFZZ	5310-00-763-0280	SMB133896	80063	WASHER,FLAT	EA	2
9	89	PAFZZ	5365-00-004-3488	SCB125315-2	80063	SLEEVE,SPACER	EA	4
9	90	PAFZZ	5310-00-579-0079	MS35333-37	96906	WASHER,LOCK	EA	50
9	91	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	63
9	92	PAFZZ	5905-00-552-3481	RV4LAYSA255A	81349	RESISTOR,VARIABLE	EA	1
9	93	PAFZZ	5910-00-284-4043	SCB125336	80063	CAPACITOR,FXD,MICA	EA	8
9	94	PAFZZ	5365-00-004-3487	SCB125315	80063	SLEEVE,SPACER	EA	4
9	95	PAFZZ	5395-00-501-5487	105-602-5	74970	CONNECTOR	EA	1

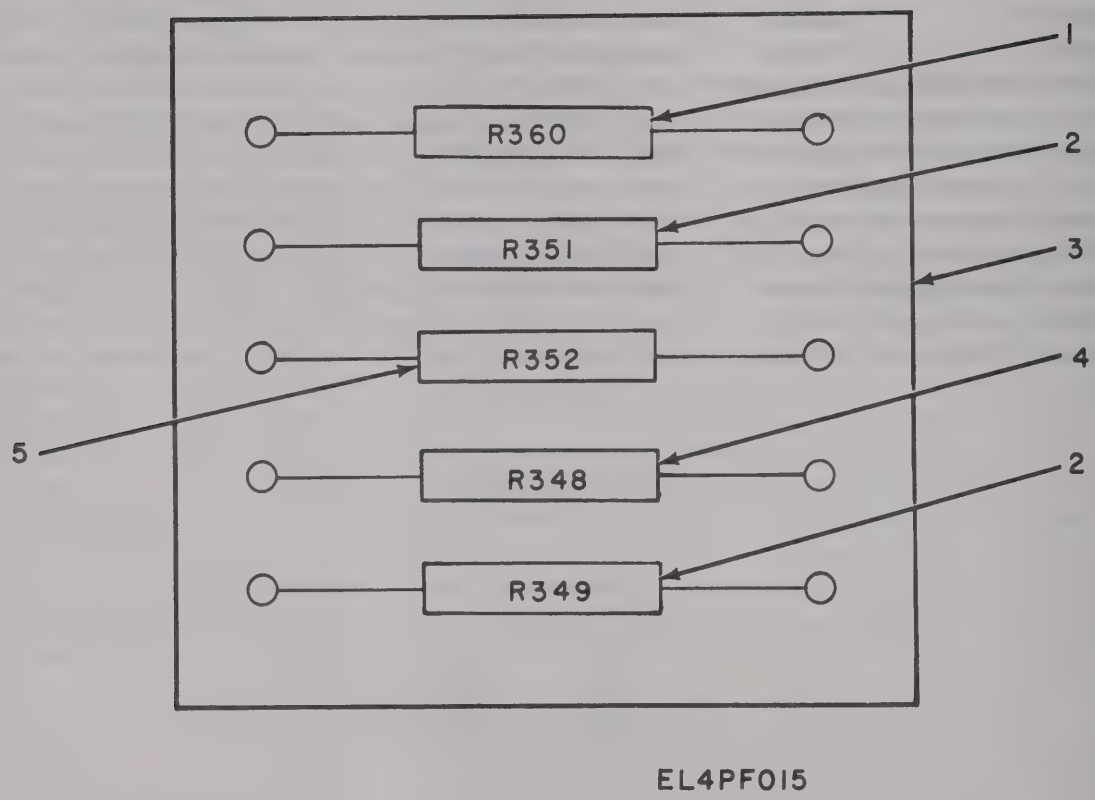

Figure 10. Converter, Signal Data CV-146A/TMQ-5, Terminal Board Assembly E315.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
10	1	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FXD,CMPSN	EA	1
10	2	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR,FXD,CMPSN	EA	2
10	3	PAFZZ	5940-00-456-1748	SMB374440	80063	TERMINAL BOARD	EA	1
10	4	PAFZZ	5905-00-195-6741	RC20GF272K	81349	RESISTOR,FXD,CMPSN	EA	1
10	5	PAFZZ	5905-00-120-9152	RCR07C274JS	81349	RESISTOR,FXD,CMPSN	EA	1

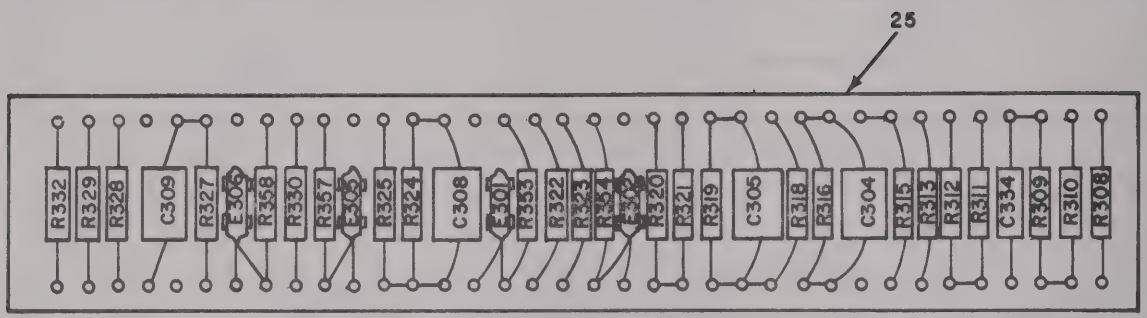

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C304	1	E305	5	R313	11	R322	18	R330	22
C305	2	E306	5	R315	12	R323	19	R332	23
C308	3	R308	6	R316	13	R324	20	R353	24
C309	1	R309	7	R318	14	R325	13	R354	24
C334	4	R310	8	R319	15	R327	19	R357	24
E301	5	R311	9	R320	16	R328	10	R358	24
E302	5	R312	10	R321	17	R329	21		

EL4PF016

Figure 11. Converter, Signal Data CV-146A/TMQ-5, Terminal Board Assembly E316.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
11	1	PAFZZ	5910-00-725-4795	CM20FD102G03	81349	CAPACITOR,FXD,MICA	EA	2
11	2	PAFZZ	5910-00-160-1158	CM200331J	81349	CAPACITOR,FXD,MICA	EA	1
11	3	PAFZZ	5910-00-984-8373	CM15FD101GP3	81349	CAPACITOR,FXD,MICA	EA	1
11	4	PAFZZ	5910-00-832-5724	CM15FD680G03	81349	CAPACITOR,FXD,MICA	EA	1
11	5	PAOZZ	6240-00-179-1811	NE2	08108	LAMP,GLOW	EA	4
11	6	PAFZZ	5905-00-114-5428	RC20GF394K	81349	RESISTOR,FXD,CMPSN	EA	1
11	7	PAFZZ	5905-00-279-1884	RC20GF335K	81349	RESISTOR,FXD,CMPSN	EA	1
11	8	PAFZZ	5905-00-141-1073	RC20GF564K	81349	RESISTOR,FXD,CMPSN	EA	1
11	9	PAFZZ	5905-00-104-8346	RC20GF334K	81349	RESISTOR,FXD,CMPSN	EA	1
11	10	PAFZZ	5905-00-279-1754	RC20GF155J	81349	RESISTOR,FXD,CMPSN	EA	1
11	11	PAFZZ	5905-00-299-2020	RC30GF273K	81349	RESISTOR,FXD,CMPSN	EA	1
11	12	PAFZZ	5905-00-249-3642	RC42GF393J	81349	RESISTOR,FXD,CMPSN	EA	1
11	13	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR,FXD,CMPSN	EA	1
11	14	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FXD,CMPSN	EA	1
11	15	PAFZZ	5905-00-185-8946	RC20GF474K	81349	RESISTOR,FXD,CMPSN	EA	1
11	16	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR,FXD,CMPSN	EA	1
11	17	PAFZZ	5905-00-106-1282	RCR20G223JS	81349	RESISTOR,FXD,CMPSN	EA	1
11	18	PAFZZ	5905-00-195-6817	RC20GF102K	81349	RESISTOR,FXD,CMPSN	EA	1
11	19	PAFZZ	5905-00-192-0450	RC42GF563K	81349	RESISTOR,FXD,CMPSN	EA	1
11	20	PAFZZ	5905-00-114-5393	RC20GF224K	81349	RESISTOR,FXD,CMPSN	EA	1
11	21	PAFZZ	5905-00-104-8350	RC20GF221K	81349	RESISTOR,FXD,CMPSN	EA	1
11	22	PAFZZ	5905-00-192-0662	RC20GF184K	81349	RESISTOR,FXD,CMPSN	EA	1
11	23	PAFZZ	5905-00-369-6923	RCR32G223JS	81349	RESISTOR,FXD,CMPSN	EA	1
11	24	PAFZZ	5905-00-171-2000	RC20GF684J	81349	RESISTOR,FXD,CMPSN	EA	4
11	25	PAFZZ	5940-00-456-1418	SMC374446	80063	TERMINAL BOARD	EA	1

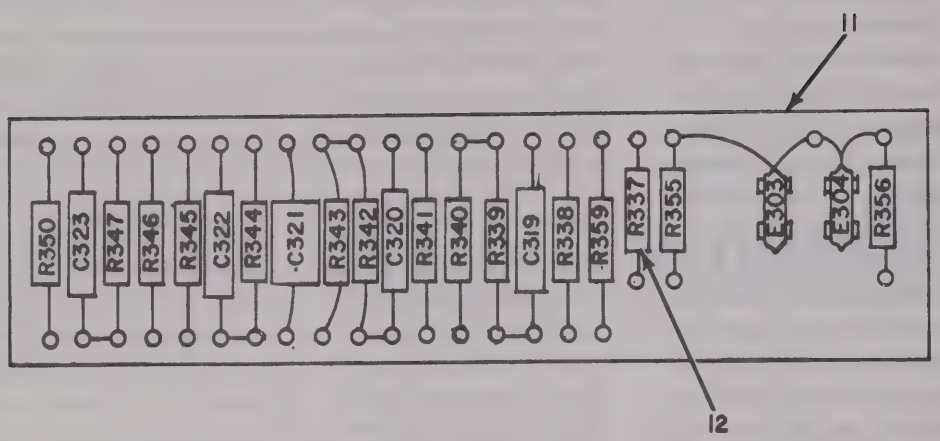

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C319	1	E304	3	R342	6	R350	6
C320	1	R337	4	R343	7	R355	10
C321	2	R338	5	R344	6	R356	10
C322	1	R339	6	R345	6	R359	5
C323	1	R340	4	R346	8		
E303	3	R341	6	R347	9		

EL4PF017

Figure 12. Converter, Signal Data CV-146A/TMQ-5, Terminal Board Assembly E317.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
12	1	PAFZZ	5910-00-840-6672	CP25AIEF103K	81349	CAPACITOR,FXD,PAPER	EA	4
12	2	PAFZZ	5910-00-725-1994	CM20C221K	81349	CAPACITOR,FXD,MICA	EA	1
12	3	PAFZZ	6240-00-179-1811	NE2	08108	LAMP,GLOW	EA	2
12	4	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FXD,CMPSN	EA	2
12	5	PAFZZ	5905-00-141-1073	RC20GF564K	81349	RESISTOR,FXD,CMPSN	EA	2
12	6	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR,FXD,CMPSN	EA	6
12	7	PAFZZ	5905-00-185-6575	RCGF292K	81349	RESISTOR,FXD,CMPSN	EA	1
12	8	PAFZZ	5905-00-279-2672	RC20GF182K	81349	RESISTOR,FXD,CMPSN	EA	1
12	9	PAFZZ	5905-00-114-5393	RC20GF224K	81349	RESISTOR,FXD,CMPSN	EA	1
12	10	PAFZZ	5905-00-171-2000	RC20GF684J	81349	RESISTOR,FXD,CMPSN	EA	2
12	11	PAFZZ	5940-00-456-1749	SMB374444	80063	TERMINAL BOARD	EA	1
12	12	XDFZZ		15143	82205	TUBING	EA	1

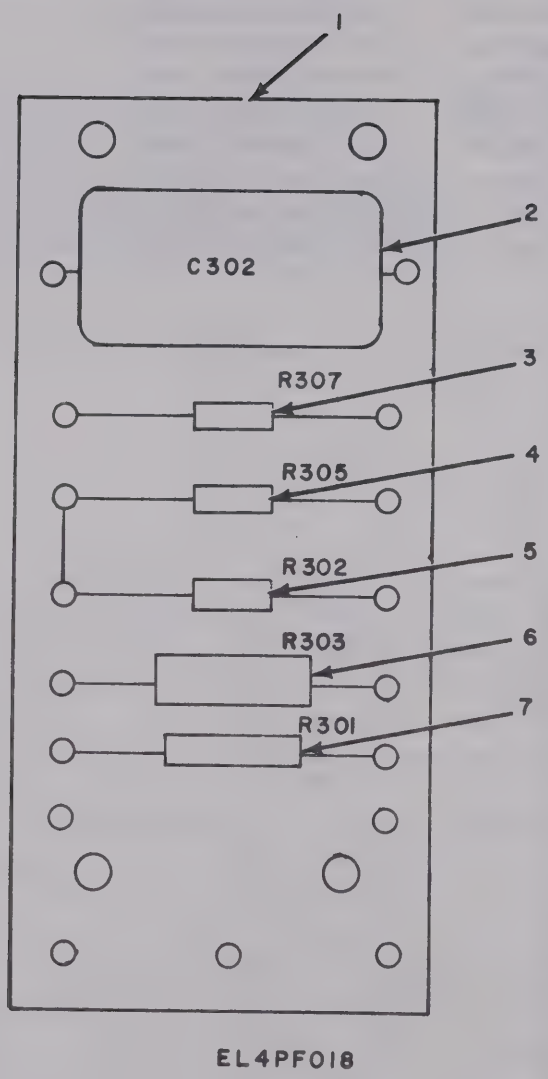

Figure 13. Converter, Signal Data CV-146A/TMQ-5, Terminal Board Assembly E318.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
13	1	PAFZZ	5940-00-456-1650	SM8374441	80063	TERMINAL BOARD	EA	1
13	2	PAFZZ	5910-00-823-1145	CP05AIKF223K3	81349	CAPACITOR,FXD,PAPER	EA	1
13	3	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR,FXD,CMPSN	EA	1
13	4	PAFZZ	5905-00-104-8330	RC20GF333K	81349	RESISTOR,FXD,CMPSN	EA	1
13	5	PAFZZ	5905-00-190-8885	RC20GF225J	81349	RESISTOR,FXD,CMPSN	EA	1
13	6	PAFZZ	5905-00-279-1943	RC42GF184J	81349	RESISTOR,FXD,CMPSN	EA	1
13	7	PAFZZ	5905-00-299-2001	RC30GF124K	81349	RESISTOR,FXD,CMPSN	EA	1

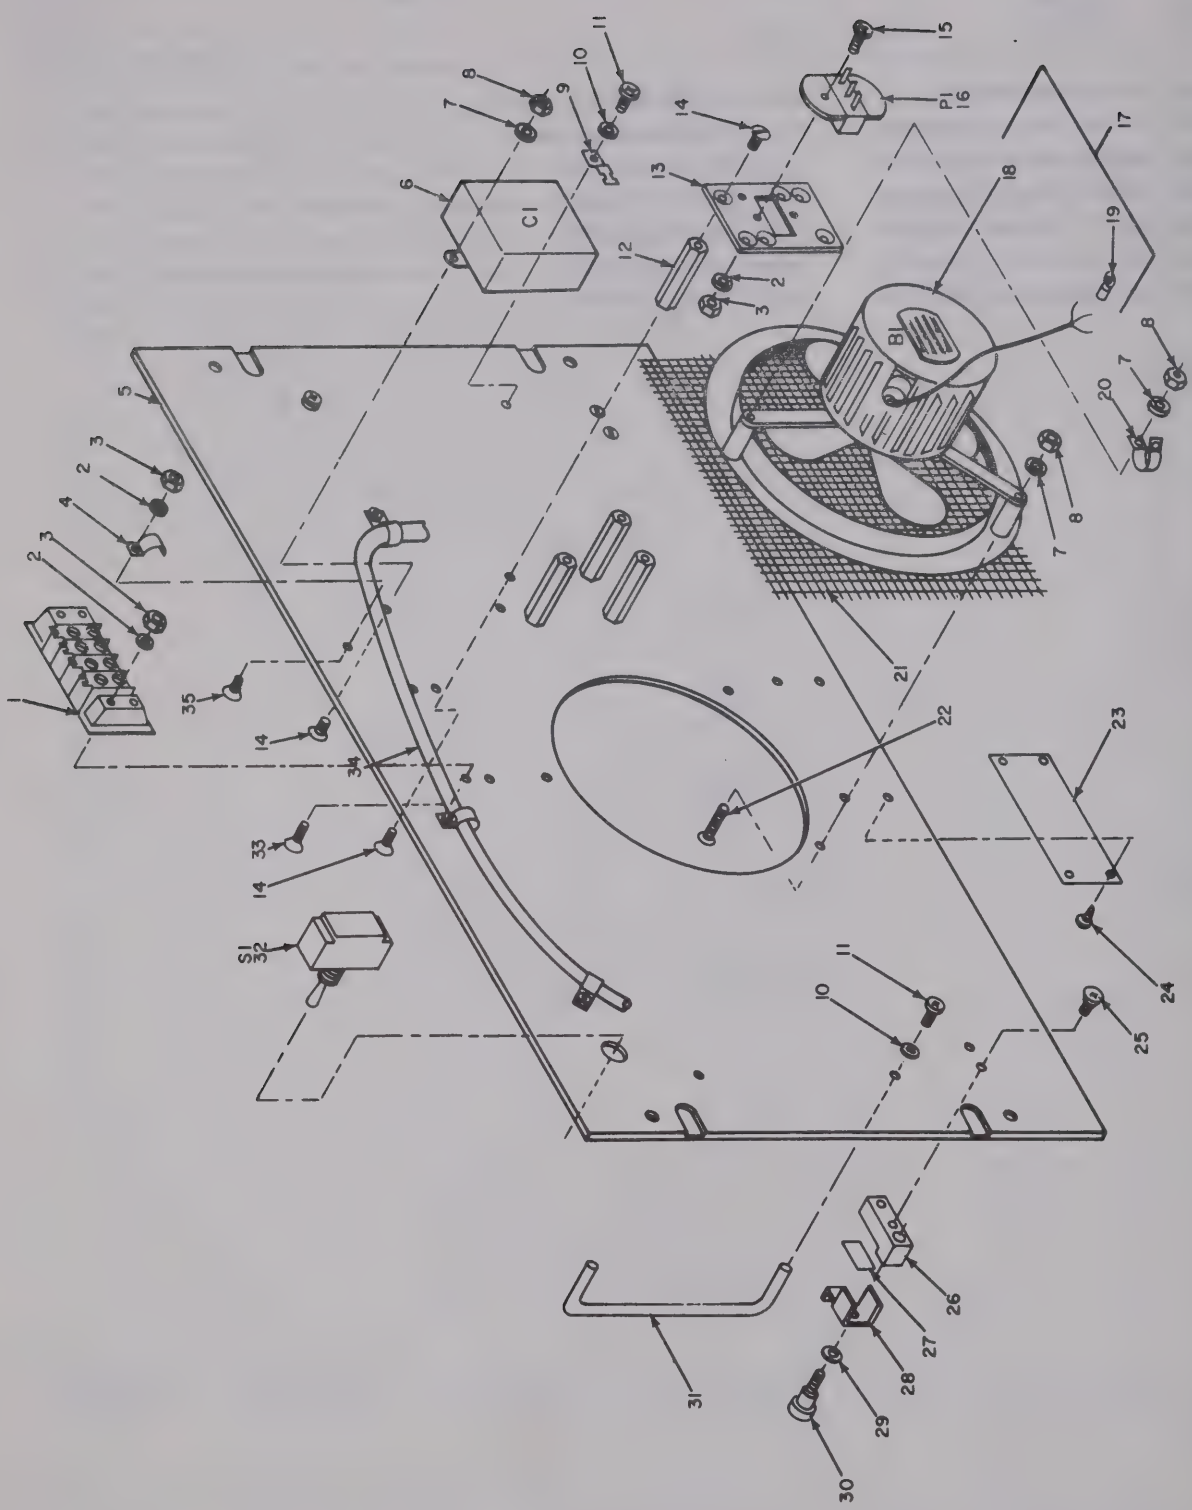

Figure 14. Cabinet Subassembly, Electrical Equipment MX-1482/TMQ-5.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 04 CABINET SUBASSEMBLY,ELECTRICAL EQUIPMENT MX-1482/TMQ-5		
14	1	PAFZZ	5940-00-983-6082	38T84	81349	TERMINAL BOARD	EA	1
14	2	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	10
14	3	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	10
14	4	XDFZZ		1036	71785	CLAMP	EA	4
14	5	XDFZZ		SCD125402	80063	PANEL	EA	1
14	6	PAFZZ	5910-00-129-6260	CP538IEF105V1	81349	CAPACITOR,FXD,PAPER	EA	1
14	7	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	9
14	8	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	9
14	9	PAFZZ	5940-00-258-2359	2120-08-00	78189	TERMINAL,LUG	EA	1
14	10	PAFZZ	5310-00-959-0070	MS35333-38	96906	WASHER,LOCK	EA	3
14	11	PAFZZ	5305-00-984-6193	MS35206-245	96906	SCREW,MACHINE	EA	4
14	12	XDFZZ		SCB125407	80063	POST	EA	4
14	13	XDFZZ		SCB125404	80063	PLATE	EA	1
14	14	PAFZZ	5305-00-059-4568	MS35190-253	96906	SCREW,MACHINE	EA	10
14	15	PAFZZ	5305-00-059-8251	MS35214-26	96906	SCREW,MACHINE	EA	2
14	16	PAFZZ	5935-00-149-3083	SCB125413	80063	CONNECTOR	EA	1
14	17	PAFFF	4140-00-376-2213	SCC125415	80063	FAN ASSEMBLY	EA	1
14	18	XDFZZ		DFG5450LR92A5	82877	FAN	EA	1
14	19	PAFZZ	5940-00-113-3137	MS20659-1	96906	TERMINAL,LUG	EA	4
14	20	XDFZZ		SCB125412	80063	CLAMP	EA	1
14	21	XDFZZ		SCB125405	80063	GRILL	EA	1
14	22	PAFZZ	5305-00-954-2728	MS35190-255	96906	SCREW,MACHINE	EA	3
14	23	XDFZZ		SMC133949	80063	PLATE	EA	1
14	24	PAFZZ	5305-00-253-5607	MS21318-8	96906	SCREW,DRIVE	EA	4
14	25	PAFZZ	5305-00-958-5453	MS35190-236	96906	SCREW,MACHINE	EA	4
14	26	XDFZZ		SCB125410	80063	BLOCK	EA	2
14	27	XDFZZ		SCB125411	80063	BUMPER	EA	2
14	28	PAFZZ	5340-00-611-7530	SCB125409	80063	LATCH,FASTENER	EA	2
14	29	PAFZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	2
14	30	XDFZZ		SCB125408	80063	SCREW,THUMB	EA	2
14	31	XDFZZ		SCB125108-1	80063	HANDLE	EA	2
14	32	PAFZZ	5930-00-655-1575	MS35059-22	96906	SWITCH,TOGGLE	EA	1
14	33	PAFZZ	5305-00-958-5450	MS35190-240	96906	SCREW,MACHINE	EA	4
14	34	XDFZZ		SCD125414	80063	WIRING ASSEMBLY	EA	1
14	35	PAFZZ	5305-00-059-4593	MS35190-238	96906	SCREW,MACHINE	EA	4

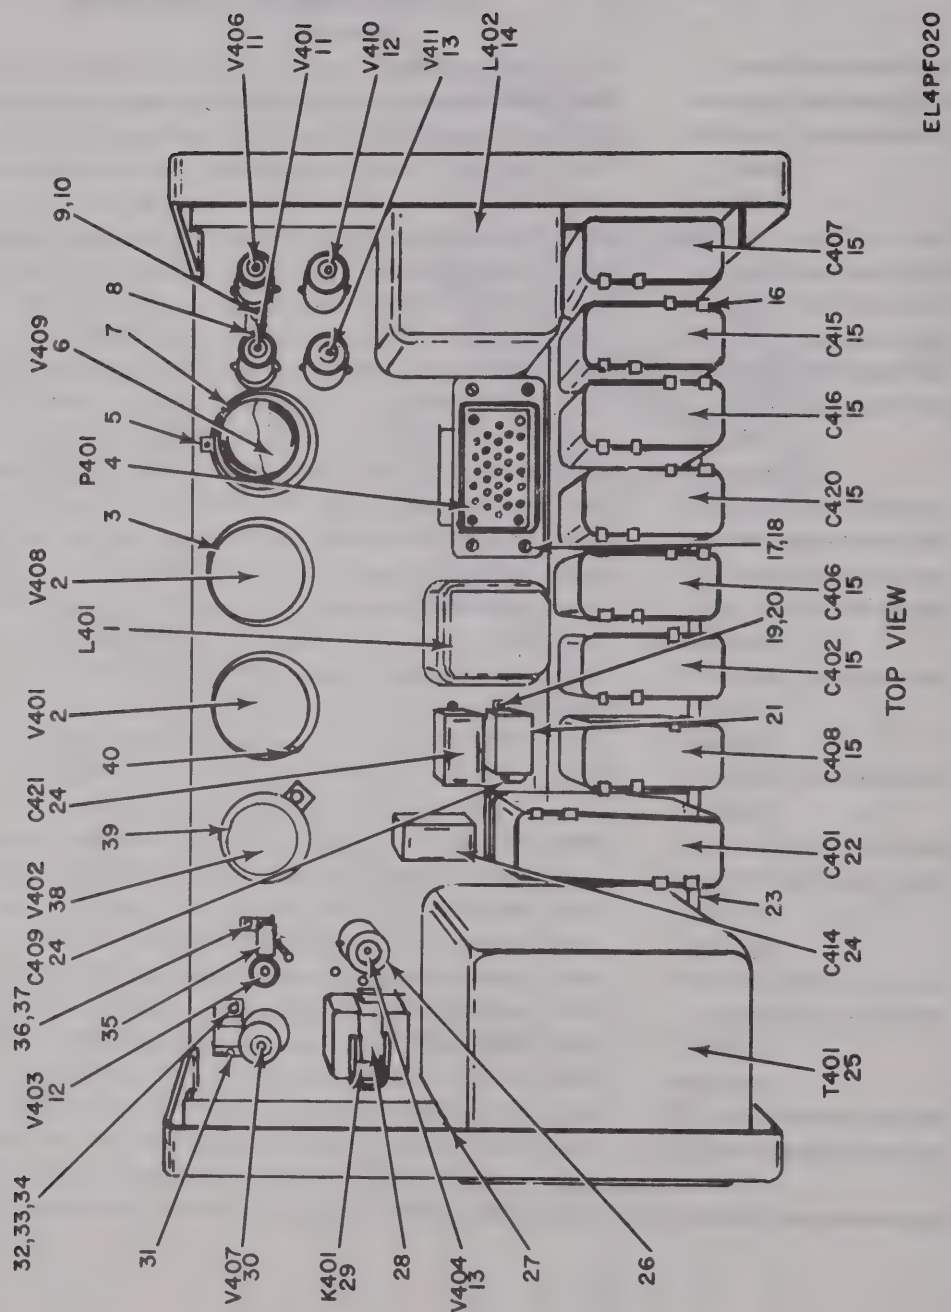

Figure 15. Power Supply PP-968A/TMQ-5 (Sheet 1 of 3).

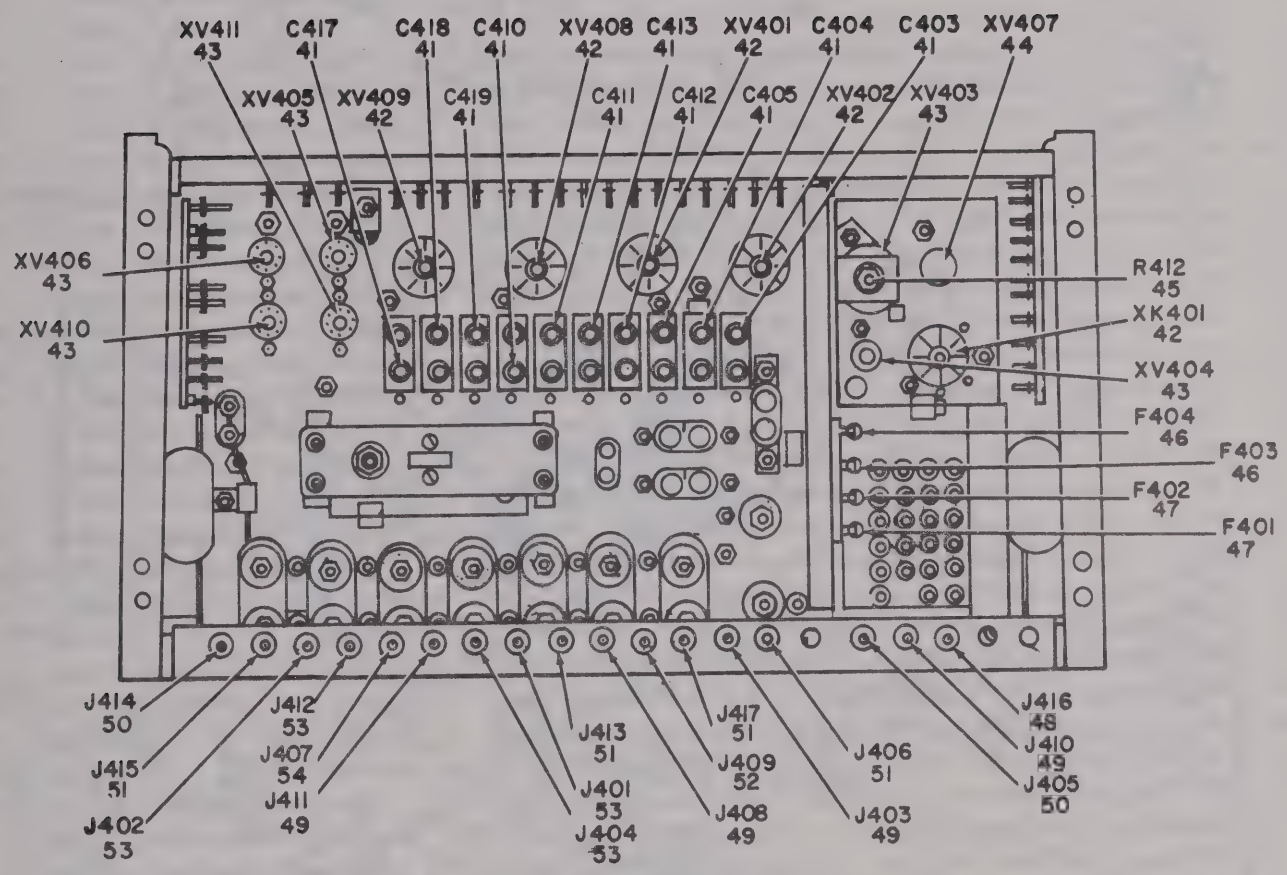

Figure 15. Power Supply PP-968A/TMQ-5 (Sheet 2 of 3).

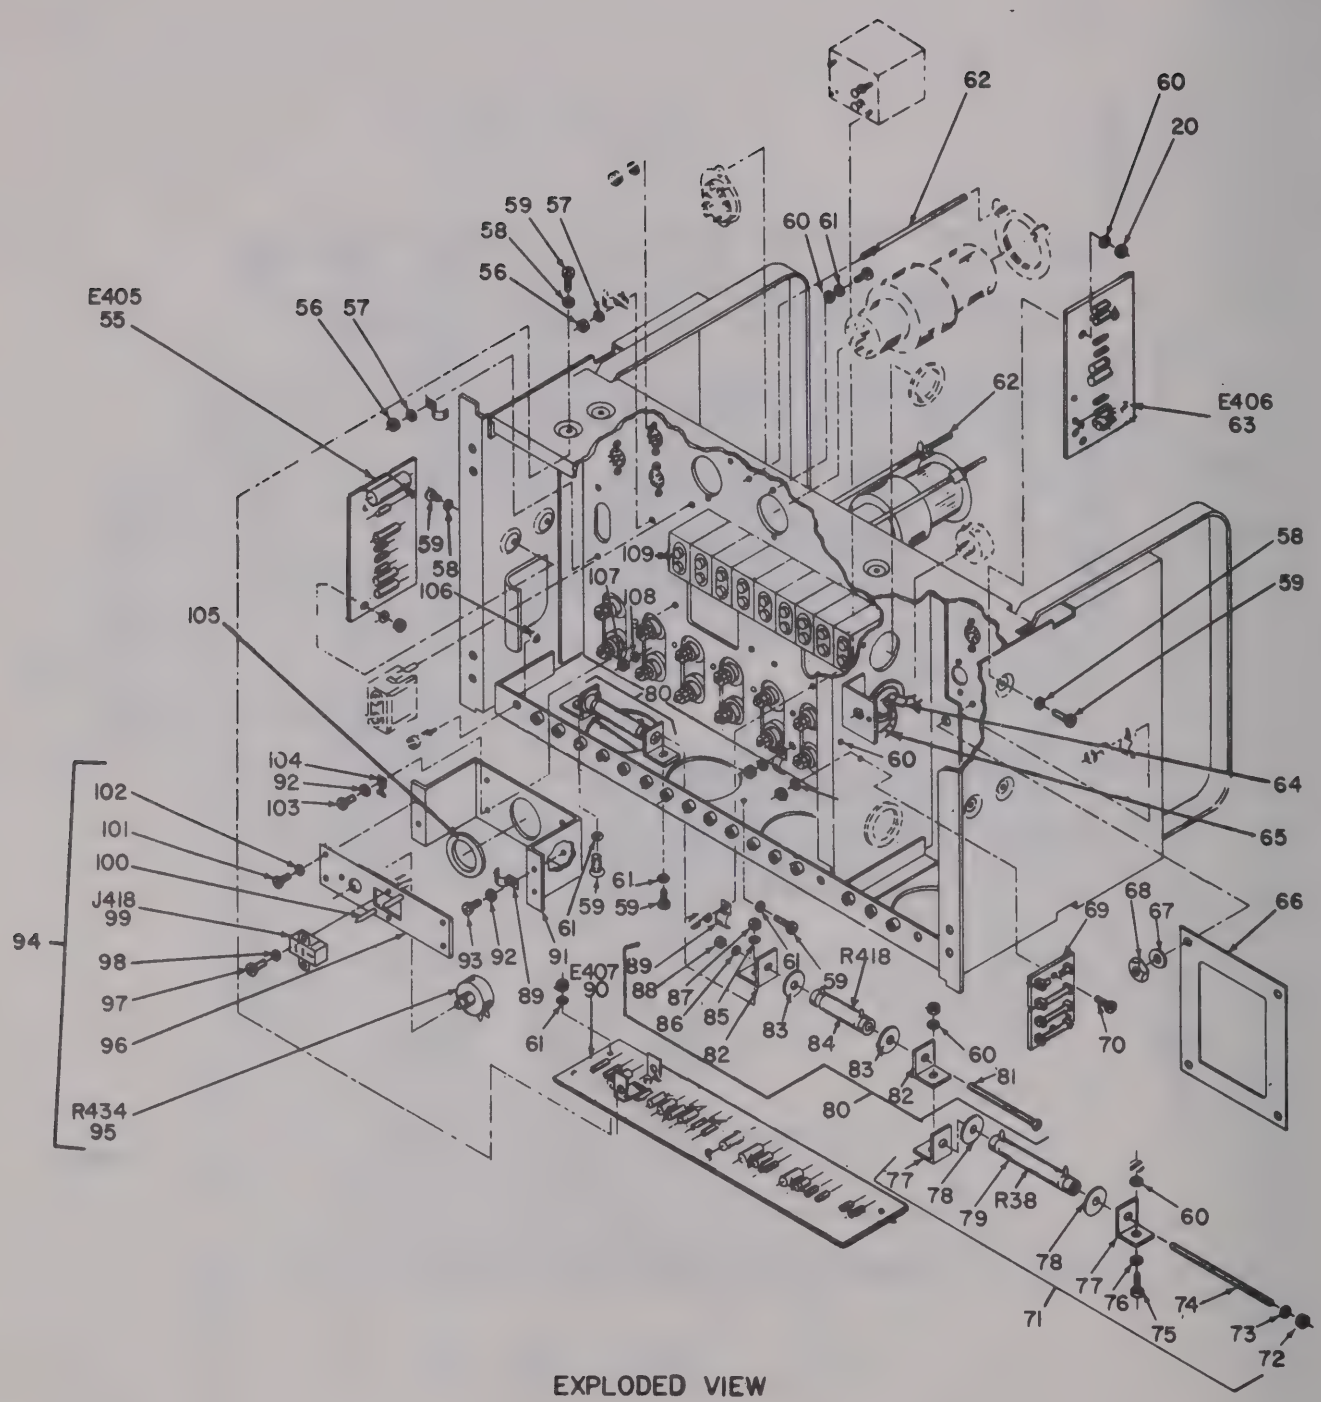

EXPLODED VIEW

EL4PF022

Figure 15. Power Supply PP-968A/TMQ-5 (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 05 POWER SUPPLY PP-968A/TMQ-5		
15	1	PAFZZ	5950-00-376-9663	SCB125238	80063	REACTOR,POWER	EA	1
15	2	PAFZZ	5960-00-262-1703	5R4WGB	49956	ELECTRON TUBE	EA	2
15	3	XDFZZ		4YHAT	66150	RETAINER,TUBE	EA	2
15	4	PAFZZ	5935-00-201-2478	DPD828-34P	71468	CONNECTOR	EA	1
15	5	XDFZZ		42	66150	POST,SUPPORTING	EA	2
15	6	PAFZZ	5960-00-166-7674	6AS7G	95303	ELECTRON TUBE	EA	1
15	7	XDFZZ		5YHAT	66150	RETAINER,TUBE	EA	1
15	8	PAFZZ	5960-00-295-8500	302-2D	07387	CLAMP	EA	2
15	9	PAFZZ	5305-00-889-2997	MS35206-215	96906	SCREW,MACHINE	EA	21
15	10	PAFZZ	5310-00-193-7577	MS35333-36	96906	WASHER,LOCK	EA	23
15	11	PAFZZ	5960-00-669-6861	6005-6AQ5W	95303	ELECTRON TUBE	EA	2
15	12	PAFZZ	5960-00-179-3710	6AU6WC	95303	ELECTRON TUBE	EA	2
15	13	PAFZZ	5960-00-262-0286	5651WA	03507	ELECTRON TUBE	EA	2
15	14	PAFZZ	5950-00-295-7642	SCB125233	80063	REACTOR,POWER	EA	1
15	15	PAFZZ	5910-00-052-9504	CP70E1EF405K	81349	CAPACITOR,FXD,PAPER	EA	7
15	16	PAFZZ	5910-00-666-0087	CP07584	81349	BRACKET	EA	8
15	17	PAFZZ	6130-00-373-2834	SCB125227	80063	POST	EA	4
15	18	PAFZZ	5305-00-889-3000	MS35206-230	96906	SCREW,MACHINE	EA	4
15	19	PAFZZ	5310-00-579-0079	MS35333-37	96906	WASHER,LOCK	EA	38
15	20	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	41
15	21	PAFZZ	5340-00-434-1553	CP0915A6	00656	BRACKET	EA	3
15	22	PAFZZ	5910-00-752-4843	CP70E1EG405K	81349	CAPACITOR,FXD,PAPER	EA	1
15	23	XDFZZ		SCD125202	80063	CHASSIS ASSEMBLY	EA	1
15	24	PAFZZ	5910-00-578-1368	CP61B1EF105K	81349	CAPACITOR,FXD,PAPER	EA	3
15	25	PAFZZ	5950-00-646-0459	SCC125231	80063	TRANSFORMER	EA	1
15	26	XDFZZ		7TS102U02	03507	SHIELD,TUBE	EA	2
15	27	XDFZZ		SCC125236	80063	BRACKET	EA	1
15	28	PAFZZ	5945-00-373-2833	1060-1	07387	RETAINER	EA	1
15	29	PAFZZ	5945-00-204-5776	SCB125239	80063	RELAY,ARMATURE	EA	1
15	30	PAFZZ	5960-00-082-4115	6189	95303	ELECTRON TUBE	EA	1
15	31	PAFZZ	5960-00-387-6270	302-2C	07387	CLAMP	EA	1
15	32	PAFZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	21
15	33	PAFZZ	5305-00-984-4984	MS35206-227	96906	SCREW,MACHINE	EA	12
15	34	PAFZZ	5340-00-197-8812	1069	71785	CLAMP	EA	4
15	35	PAFZZ	5960-00-280-8629	302-2B	07387	CLAMP	EA	2
15	36	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	7
15	37	PAFZZ	5340-00-200-5463	1068	71785	CLAMP	EA	1
15	38	PAFZZ	5960-00-617-6097	6Y6GT	95303	ELECTRON TUBE	EA	1
15	39	XDFZZ		2YHAT	66150	RETAINER,TUBE	EA	1

SECTION II

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
15	40	XDFZZ		32	66150	POST,SUPPORTING	EA	1
15	41	PAFZZ	5910-00-825-1842	CP91BIEG104K	81349	CAPACITOR,FXD,PAPER	EA	10
15	42	PAFZZ	5935-00-129-9358	TS101P02	80058	SOCKET,TUBE	EA	5
15	43	PAFZZ	5935-00-260-0516	TS102P01	81349	SOCKET,TUBE	EA	6
15	44	PAFZZ	5935-00-812-4936	TS103P01	00624	SOCKET,TUBE	EA	1
15	45	PAFZZ	5905-00-501-5184	RV4LAYSA503A	81349	RESISTOR,VARIABLE	EA	1
15	46	XDFZZ		FOZGB300B	75915	FUSE,CARTRIDGE	EA	2
15	47	PAFZZ	5920-00-281-0205	FO2B250V1-8AS	81349	FUSE,CARTRIDGE	EA	2
15	48	PAFZZ	5935-00-421-5864	1036031	74970	CONNECTOR	EA	1
15	49	PAFZZ	5935-00-549-9278	105-605-1	74970	CONNECTOR	EA	4
15	50	PAFZZ	5935-00-280-2234	105-606-1	74970	CONNECTOR	EA	2
15	51	PAFZZ	5935-00-685-9396	105-601-1	74970	CONNECTOR	EA	4
15	52	PAFZZ	5935-00-557-2938	105-609-1	74970	CONNECTOR	EA	1
15	53	PAFZZ	5395-00-501-5487	105-602-5	74970	CONNECTOR	EA	4
15	54	PAFZZ	5935-00-257-7041	105-610-1	74970	CONNECTOR	EA	1
15	55	XDFFF		SCC125224	80063	TERMINAL BOARD	EA	1
15	56	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	4
15	57	PAFZZ	5310-00-559-0070	MS35333-38	96906	WASHER,LOCK	EA	4
15	58	PAFZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT	EA	14
15	59	PAFZZ	5305-00-984-4989	MS35206-229	96906	SCREW,MACHINE	EA	18
15	60	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	31
15	61	PAFZZ	5310-00-082-1404	MS27183-6	96906	WASHER,FLAT	EA	15
15	62	XDFZZ		32	66150	POST,SUPPORTING	EA	4
15	63	XDFFF		SCC125225	80063	TERMINAL BOARD	EA	1
15	64	XDFZZ		SMD133925	80063	WIRING ASSEMBLY	EA	1
15	65	XDFZZ		SMD133920	80063	CABLE ASSEMBLY	EA	1
15	66	XDFZZ		SCB125228	80063	PLATE	EA	1
15	67	PAFZZ	5310-00-582-5965	MS35338-44	96906	WASHER,LOCK	EA	4
15	68	PAFZZ	5310-00-826-5217	MS35690-401	96906	NUT,PLAIN,HEXAGON	EA	4
15	69	XDFZZ		SCB125211	80063	HOLDER,FUSE	EA	1
15	70	PAFZZ	5305-00-983-6730	MS35206-218	96906	SCREW,MACHINE	EA	2
15	71	XDFFF		SCB125222	80063	RESISTOR ASSEMBLY	EA	1
15	72	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	1
15	73	PAFZZ	5310-00-596-7691	MS35335-32	96906	WASHER,LOCK	EA	5
15	74	PAFZZ	5307-00-487-9552	15135	82205	ROD,THREADED	EA	1
15	75	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	1
15	76	PAFZZ	5310-00-082-1404	MS27183-6	96906	WASHER,FLAT	EA	1
15	77	XDFZZ		SCB125215	80063	BRACKET	EA	6
15	78	XDFZZ		15134	82205	WASHER,MICA	EA	6
15	79	PAFZZ	5905-00-642-2444	RW33G561	81349	RESISTOR,FXD,WW	EA	1

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
15	80	XDFZZ		SCB125223	80063	RESISTOR ASSEMBLY	EA	2
15	81	PAFZZ	5305-00-958-0586	MS35207-273	96906	SCREW,MACHINE	EA	2
15	82	XDFZZ		SCB125215	80063	BRACKET	EA	4
15	83	XDFZZ		15134	82205	WASHER,MICA	EA	4
15	84	PAFZZ	5905-00-636-6710	RW32V222	81349	RESISTOR,FXD,WW	EA	1
15	85	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	1
15	86	PAFZZ	5310-00-596-7691	MS35335-32	96906	WASHER,LOCK	EA	2
15	87	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGO	EA	1
15	88	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	2
15	89	PAFZZ	5340-00-514-0112	1070	71785	CLAMP	EA	3
15	90	XDFFF		SCD125226	80063	TERMINAL BOARD	EA	1
15	91	XDFZZ		SCC125212	80063	BRACKET	EA	1
15	92	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	8
15	93	PAFZZ	5315-00-498-6727	SCB125232	80063	PIN,SHOULDER,HEA	EA	1
15	94	PAFFF	5935-00-791-8711	SCB125221	80063	CONNECTOR ASSEMBLY	EA	1
15	95	PAFZZ	5905-00-501-5184	RV4LAYSA503A	81349	RESISTOR,VARIABLE	EA	1
15	96	PAFZZ	5340-00-480-4267	SCB125213	80063	PLATE	EA	1
15	97	PAFZZ	5305-00-206-3716	MS35214-25	96906	SCREW,MACHINE	EA	2
15	98	PAFZZ	5310-00-209-0788	MS35335-30	96906	WASHER,LOCK	EA	2
15	99	PAFZZ	5935-00-590-2182	5303AB	71785	CONNECTO	EA	1
15	100	PAFZZ	5315-00-498-6727	SCB125232	80063	PIN	EA	1
15	101	PAFZZ	5305-00-984-6191	MS35206-243	96906	SCREW,MACHINE	EA	4
15	102	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	1
15	103	PAFZZ	5305-00-984-6194	MS35206-246	96906	SCREW,MACHINE	EA	4
15	104	PAFZZ	5940-00-258-2359	2120-08-00	78189	TERMINAL,LUG	EA	1
15	105	PAFZZ	5325-00-276-5954	MS35489-49	96906	GROMMET	EA	3
15	106	PAFZZ	5310-00-209-0786	MS35335-33	96906	WASHER,LOCK	EA	17
15	107	PAFZZ	5310-00-012-0614	MS35650-102	96906	NUT,PLAIN,HEX	EA	20
15	108	PAFZZ	5310-00-576-5752	MS35333-39	96906	WASHER,LOCK	EA	3
15	109	PAFZZ	5910-00-160-4919	CP06SA2	81349	BRACKET	EA	10

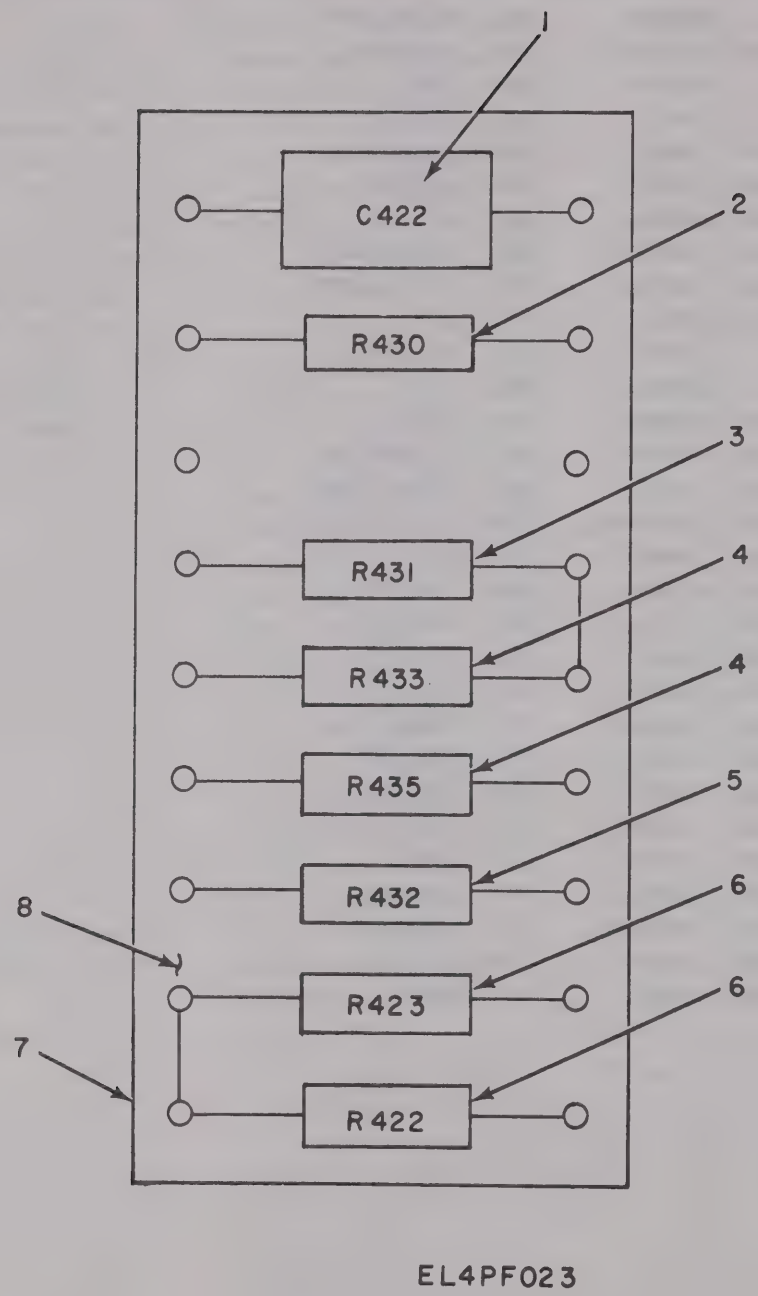

Figure 16. Power Supply PP-968A/TMQ-5, Circuit Card Assembly E405.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
16	1	PAFZZ	5910-00-543-9081	CP26A1EF503K	81349	CAPACITOR,FXD,PAPER	EA	1
16	2	PAFZZ	5905-00-171-2009	RC20GF222K	81349	RESISTOR,FXD,WW	EA	1
16	3	PAFZZ	5905-00-249-4243	RC42GF273K	81349	RESISTOR,FXD,CMPSN	EA	1
16	4	PAFZZ	5905-00-192-0662	RC20GF184K	81349	RESISTOR,FXD,CMPSN	EA	2
16	5	PAFZZ	5905-00-185-6946	RC20GF474K	81349	RESISTOR,FXD,CMPSN	EA	1
16	6	PAFZZ	5905-00-279-2531	RC32GF206J	81349	RESISTOR,FXD,CMPSN	EA	2
16	7	XDFFF		SMB374443	80063	TERMINAL BOARD	EA	1
16	8	PAFZZ	5940-00-456-1591	SC-B-125218	80063	TERMINAL BOARD	EA	1

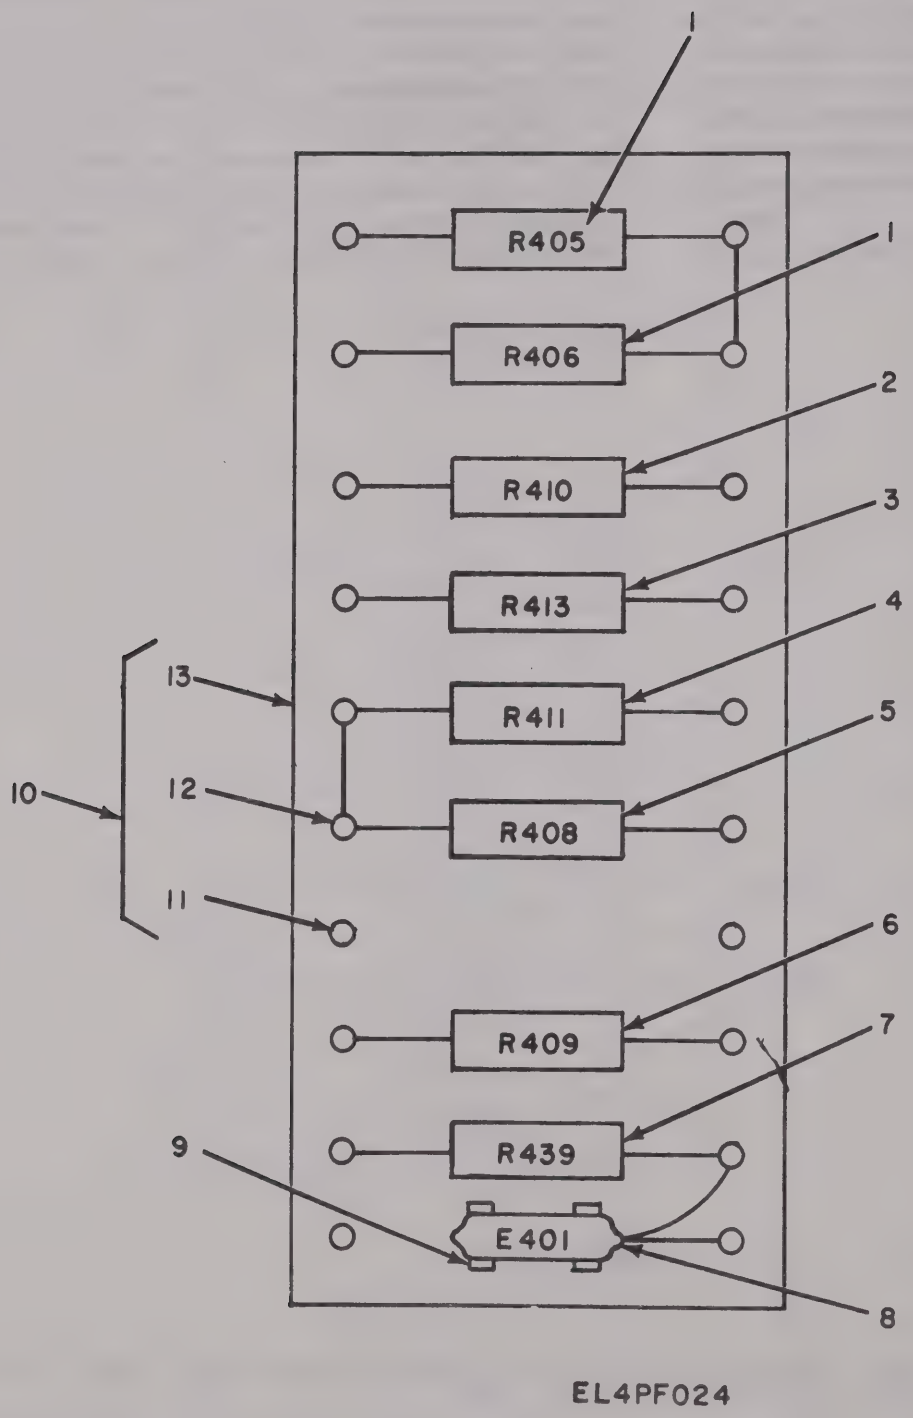

Figure 17. Power Supply PP-968A/TMQ-5, Circuit Card Assembly E406.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
17	1	PAFZZ	5905-00-279-2531	RC32GF206J	81349	RESISTOR,FXD,CMPSN	EA	2
17	2	PAFZZ	5905-00-185-6946	RC20GF474K	81349	RESISTOR,FXD,CMPSN	EA	1
17	3	PAFZZ	5905-00-192-9260	RC20GF154K	81349	RESISTOR,FXD,CMPSN	EA	1
17	4	PAFZZ	5905-00-247-8730	RCR32G394JS	81349	RESISTOR,FXD,CMPSN	EA	1
17	5	PAFZZ	5905-00-249-3663	RC42GF683K	81349	RESISTOR,FXD,CMPSN	EA	1
17	6	PAFZZ	5905-00-171-2009	RC20GF222K	81349	RESISTOR,FXD,CMPSN	EA	1
17	7	PAFZZ	5905-00-171-2000	RC20GF684J	81349	RESISTOR,FXD,CMPSN	EA	1
17	8	PAFZZ	6240-00-179-1811	NE2	08108	LAMP,GLOW	EA	1
17	9	PAFZZ	5999-00-177-1694	121002	75915	CLIP	EA	1
17	10	XDFFF		SM8374442	80063	TERMINAL BOARD	EA	1
17	11	PAFZZ	5325-00-550-0619	SE47	61957	EYELET	EA	2
17	12	PAFZZ	5940-00-177-6738	MS17122-15	96906	TERMINAL,LUG	EA	20
17	13	XDFZZ		SC8125219	80063	TERMINAL BOARD	EA	1

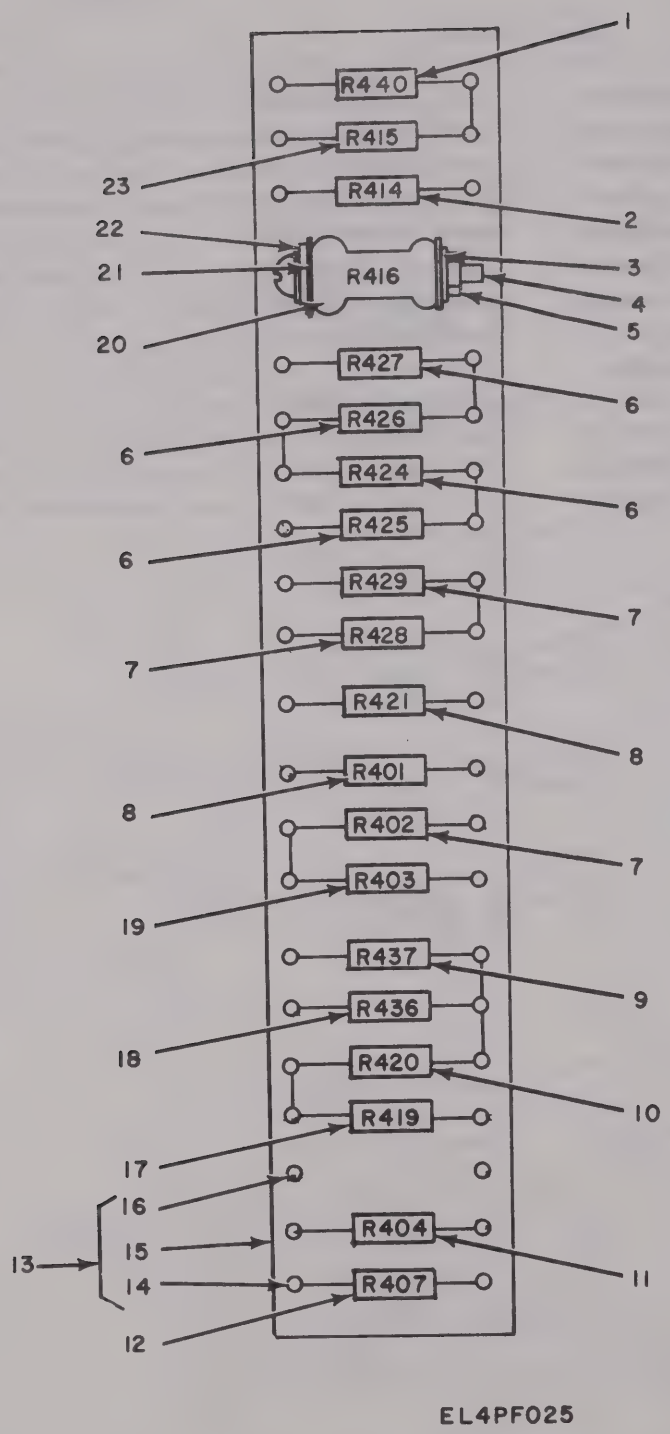

Figure 18. Power Supply PP-968A/TMQ-5, Circuit Card Assembly E407.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
18	1	PAFZZ	5905-00-185-6946	RC20GF474K	81349	RESISTOR,FXD,CMPSN	EA	1
18	2	PAFZZ	5905-00-171-1976	RC42GF153K	81349	RESISTOR,FXD,CMPSN	EA	1
18	3	PAFZZ	5310-00-596-7691	MS35335-32	96906	WASHER,LOCK	EA	1
18	4	PAFZZ	5305-00-995-6311	MS35207-271	96906	SCREW,MACHINE	EA	1
18	5	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	1
18	6	PAFZZ	5905-00-247-8710	RC32G220JS	81349	RESISTOR,FXD,CMPSN	EA	4
18	7	PAFZZ	5905-00-114-5393	RC20GF224K	81349	RESISTOR,FXD,CMPSN	EA	3
18	8	XDFZZ		RC30GF825K	81349	RESISTOR,FXD,CMPSN	EA	2
18	9	PAFZZ	5905-00-249-3642	RC42GF393J	81349	RESISTOR,FXD,CMPSN	EA	1
18	10	PAFZZ	5905-00-190-8885	RC20GF225J	81349	RESISTOR,FXD,CMPSN	EA	1
18	11	PAFZZ	5905-00-171-2005	RC20GF471K	81349	RESISTOR,FXD,CMPSN	EA	1
18	12	PAFZZ	5905-00-192-4408	RC20GF562K	81349	RESISTOR,FXD,CMPSN	EA	1
18	13	XDFFF		SMC374445	80063	TERMINAL BOARD	EA	1
18	14	PAFZZ	5940-00-177-6738	M55155-30-15	81349	TERMINAL,LUG	EA	40
18	15	PAFZZ	5940-00-456-1485	SC-C-125220	80063	TERMINAL BOARD	EA	1
18	16	XDFZZ		5E48	61957	EYELET	EA	2
18	17	PAFZZ	5905-00-249-4248	RC20GF333K	81349	RESISTOR,FXD,CMPSN	EA	1
18	18	PAFZZ	5905-00-456-0662	RCR32G822JS	81349	RESISTOR,FXD,CMPSN	EA	1
18	19	PAFZZ	5905-00-114-5489	RCR20G823JS	81349	RESISTOR,FXD,CMPSN	EA	1
18	20	PAFZZ	5905-00-883-8356	RW31V240	91637	RESISTOR,FXD,WW	EA	1
18	21	XDFZZ		15134	82205	WASHER,MICA	EA	2
18	22	XDFZZ		SCB125217	80063	BRACKET,MOUNTING	EA	1
18	23	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FXD,CMPSN	EA	1

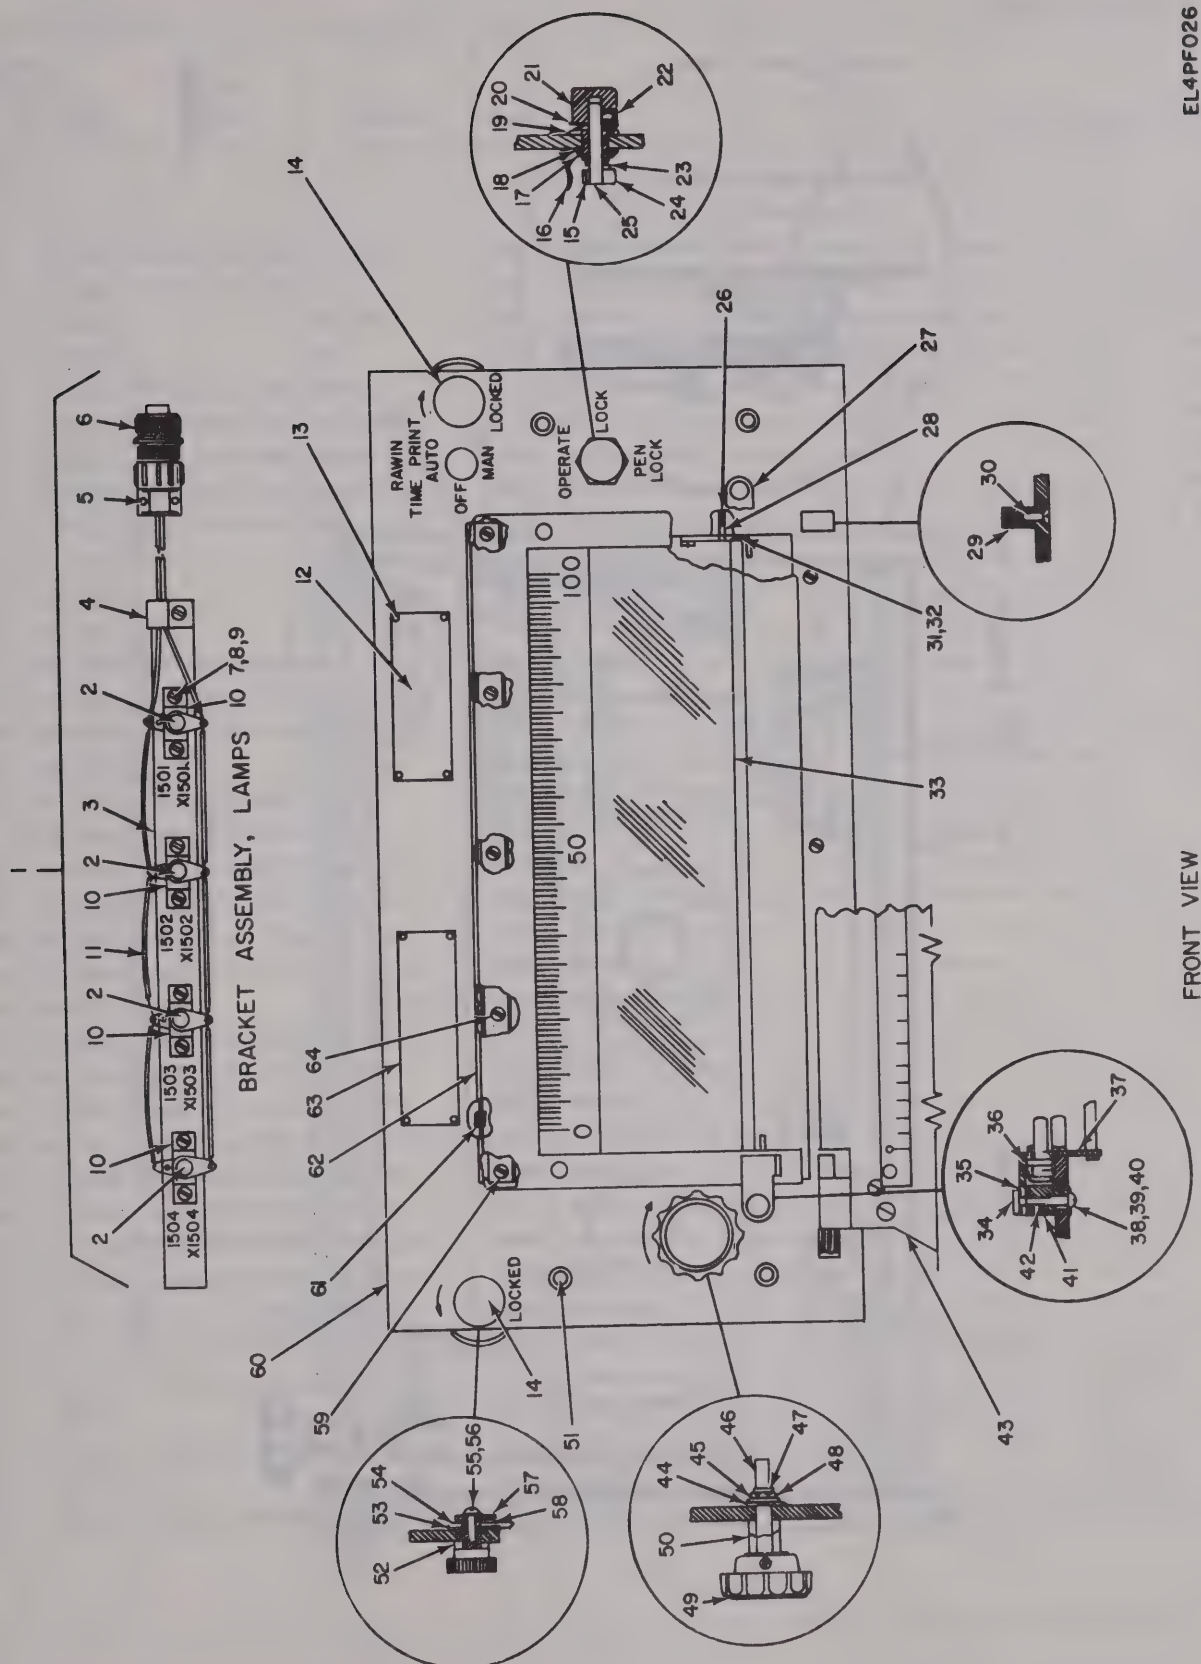

Figure 19. Recorder, Frequency Time RD-88C/TMQ-5 (Sheet 1 of 2).

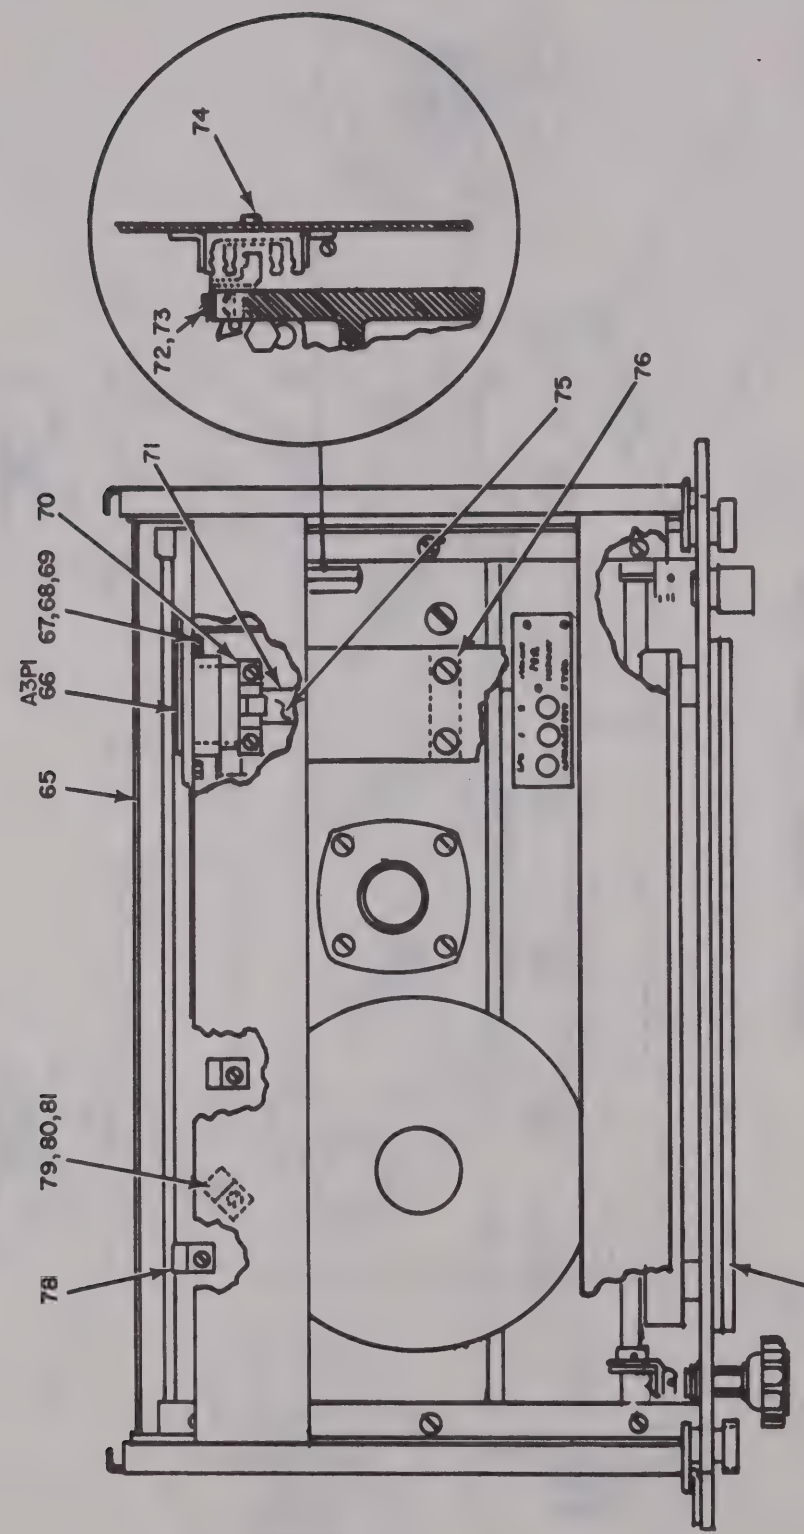

Figure 19. Recorder, Frequency Time RD-88C/TMQ-5 (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06 RECORDER,FREQUENCY TIME		
						RD-88C/TMQ-5		
19	1	PAFFF	6250-00-766-8454	SMC133911	80063	BRACKET ASSEMBLY	EA	1
19	2	PAOZZ	6240-00-057-2887	LM27	06247	LAMP,INCAND	EA	4
19	3	XDFZZ		SCC125523	80063	BRACKET	EA	1
19	4	XDFZZ		1036	71785	CLAMP	EA	7
19	5	PAFZZ	5935-00-240-0173	AN3057-4	81352	CABLE CLAMP	EA	1
19	6	PAFZZ	5935-00-539-2651	AN3106A10SL4S	81349	PLUG	EA	1
19	7	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	8
19	8	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	8
19	9	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	8
19	10	XDFZZ		SMB133902	80063	LAMP SOCKET	EA	4
19	11	XDFZZ		MWC227J91	70903	WIRE,HOOKUP	FT	3
19	12	XDOZZ		SMC145649	80063	PLATE,IDENT	EA	1
19	13	PAOZZ	5305-00-253-5607	MS21318-8	96906	SCREW,DRIVE	EA	4
19	14	PAOZZ	5355-00-519-7643	SMB133923	80063	KNOB	EA	2
19	15	PAFZZ	5305-00-724-6794	MS51964-48	96906	SETSCREW	EA	6
19	16	XDFZZ		SCB125532	80063	CATCH	EA	1
19	17	PAFZZ	5310-00-735-0797	N503A8	35529	NUT,PLAIN,HEXAGON	EA	1
19	18	PAFZZ	5310-00-198-3738	1222-01	78189	WASHER,LOCK	EA	1
19	19	PAFZZ	3110-00-528-5777	SCB125533	80063	BEARING	EA	1
19	20	PAOZZ	5310-00-753-4037	SCB125528	80063	WASHER,SPRING	EA	1
19	21	PAOZZ	5355-00-284-5196	SCB125534	80063	KNOB	EA	1
19	22	PAFZZ	5305-00-724-6798	MS51964-49	96906	SETSCREW	EA	5
19	23	XDFZZ		GP4-093X375-12	73957	PIN,GROOVED	EA	1
19	24	PAFZZ	6660-00-378-5155	SCB125536	80063	CAM	EA	1
19	25	PAFZZ	3040-00-558-2301	SCB125535	80063	SHAFT	EA	1
19	26	PAFZZ	6660-00-712-8427	SCB125529	80063	SPRING	EA	2
19	27	PAFZZ	5340-00-613-6910	SC-B-1255152	80063	LATCH,LEFT HAND	EA	1
19	28	PAFZZ	3110-00-151-9206	MS19060-19	96906	BEARING,BALL	EA	2
19	29	PAFZZ	6660-00-392-9709	SCB125522	80063	BLOCK	EA	2
19	30	PAFZZ	5305-00-059-4552	MS35190-237	96906	SCREW,MACHINE	EA	8
19	31	PAFZZ	5305-00-543-2024	MS35265-13	96906	SCREW,MACHINE	EA	2
19	32	PAFZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	30
19	33	PAFZZ	6660-00-771-9966	SCB125530	80063	GUIDE	EA	1
19	34	PAFZZ	5315-00-392-8246	SCB125514	80063	STUD	EA	2
19	35	XDFZZ		SCB125519	80063	WASHER,SPRING	EA	2
19	36	PAFZZ	5340-00-622-7484	SC-B-1255151	80063	LATCH,RIGHT HAND	EA	1
19	37	XDFZZ		SCB125525-2	80063	BRACKET,LEFT HAND	EA	1
19	38	PAFZZ	5305-00-889-3002	MS35206-242	96906	SCREW	EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
19	39	PAFZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	12
19	40	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	18
19	41	PAFZZ	6660-00-392-9712	SCB125516	80063	MOUNTING	EA	2
19	42	XDFZZ		MS51936-21	96906	SETSCREW	EA	2
19	43	PAOFF	2090-00-370-3725	SCD125505	80063	DESK ASSEMBLY	EA	1
19	44	XDFZZ		SMD145657-5	80063	WASHER,FLAT	EA	1
19	45	PAFZZ	5310-00-595-7237	MS35333-42	96906	WASHER,LOCK	EA	1
19	46	PAFZZ	6660-00-370-3729	SCB125513	80063	SHAFT	EA	1
19	47	XDFZZ		MS16624-2025	96906	RING,RETAINING	EA	1
19	48	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	9
19	49	PAOZZ	5355-00-667-6260	SMB133945	80063	KNOB	EA	1
19	50	PAFZZ	5355-00-323-6094	SCB125512	80063	BUSHING	EA	1
19	51	PAOZZ	5305-00-984-7341	MS35191-273	96906	SCREW,MACHINE	EA	4
19	52	PAOZZ	5310-00-834-0424	SCB125518-4	80063	WASHER,FLAT	EA	2
19	53	PAOZZ	5310-00-209-0123	SCB125518-3	80063	WASHER,FLAT	EA	2
19	54	PAOZZ	5340-00-611-7538	SCB125521	80063	LATCH	EA	2
19	55	PAFZZ	5305-00-984-4989	MS35206-229	96906	SCREW,MACHINE	EA	4
19	56	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	37
19	57	PAOZZ	5310-00-765-2040	SCB125518-2	80063	WASHER,FLAT	EA	2
19	58	PAOZZ	5310-00-753-4036	SCB125520	80063	WASHER,SPRING	EA	2
19	59	PAFZZ	5305-00-059-8255	MS35214-30	96906	SCREW,MACHINE	EA	3
19	60	XDOFD		SMD145657	80063	PANEL ASSEMBLY	EA	1
19	61	XDFZZ		SCB125548	80063	SPRING	EA	4
19	62	XDFZZ		SCC125547	80063	HINGE	EA	1
19	63	XDOZZ		SMB133937	80063	PLATE,CAUTION	EA	1
19	64	PAFZZ	5305-00-059-8249	MS35214-24	96906	SCREW,MACHINE	EA	2
19	65	XDOFD		SMD145651	80063	FRAME ASSEMBLY	EA	1
19	66	PAFZZ	5935-00-283-7104	DPB814-34P1G	71468	CONNECTOR	EA	1
19	67	PAFZZ	5305-00-059-4553	MS35190-238	96906	SCREW,MACHINE	EA	5
19	68	PAFZZ	5310-00-082-1404	MS27183-6	96906	WASHER,FLAT	EA	2
19	69	PAOZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	4
19	70	PAFZZ	5340-00-763-0268	SCB125503	80063	CLAMP	EA	2
19	71	XDFZZ		SMD145645	80063	WIRING ASSEMBLY	EA	1
19	72	PAOZZ	5340-00-486-7889	6303C	72653	CLIP	EA	1
19	73	PAOZZ	5305-00-984-4984	MS35206-227	96906	SCREW	EA	1
19	74	PAOZZ	5305-00-059-4552	MS35190-237	96906	SCREW	EA	4
19	75	PAFZZ	6660-00-470-3020	SMD145646	80063	CABLE ASSEMBLY	EA	1
19	76	XDFFF		SMD125507	80063	SHELF ASSEMBLY	EA	1
19	77	XDFZZ		SMD145658	80063	PANEL	EA	1
19	78	PAFZZ	5340-00-200-5463	1068	71785	CLAMP	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
19	79	XDFZZ		1036	71785	CLAMP	EA	4
19	80	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	9
19	81	PAOZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	1

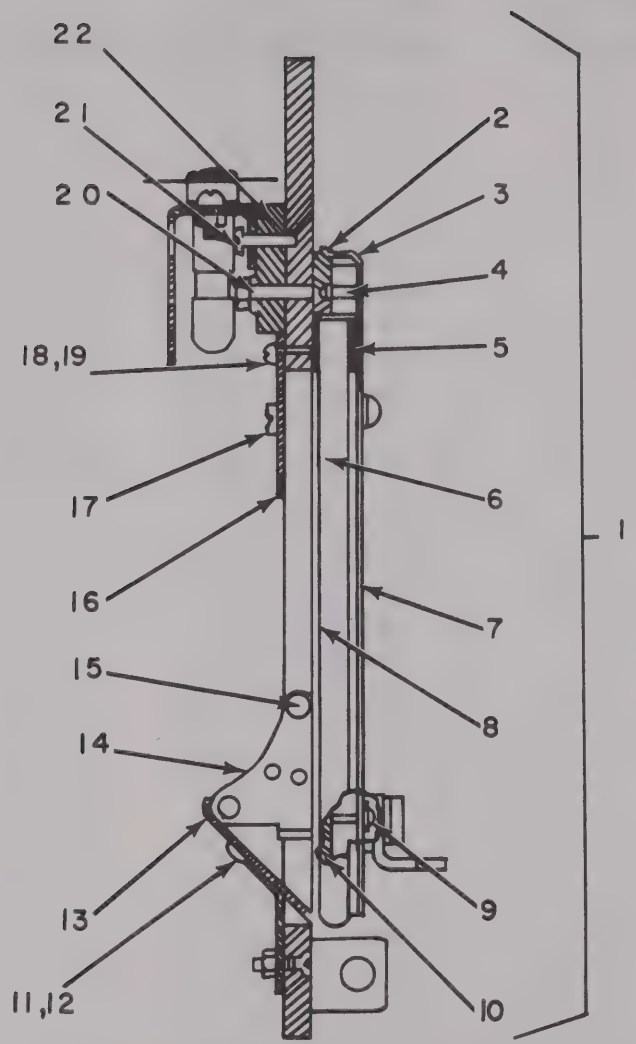

Figure 20. Recorder, Frequency Time RD-88C/TMQ-5, Side View and Window Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
20	1	PAFFF	6660-00-176-0094	SCC125540	80063	WINDOW ASSEMBLY	EA	1
20	2	PAFZZ	5340-00-209-7531	SCC125546	80063	HINGE ASSEMBLY	EA	1
20	3	XDFFF		SCC125549	80063	FRAME ASSEMBLY	EA	1
20	4	PAFZZ	5305-00-984-4982	MS35206-225	96906	SCREW,MACHINE	EA	4
20	5	PAFZZ	5330-00-291-1963	SCB125544	80063	GASKET	EA	2
20	6	XDFZZ		SCB125541	80063	WINDOW	EA	1
20	7	PAFZZ	5330-00-291-1724	SCB125542	80063	GASKET	EA	2
20	8	XDFZZ		SCB125543	80063	GASKET	EA	2
20	9	PAFZZ	5320-00-842-2748	SCB125545	80063	STUD	EA	4
20	10	PAFZZ	5310-00-297-3879	A1037-0121	78553	NUT,SPRING LOCK	EA	4
20	11	PAOZZ	5305-00-059-4553	MS35190-238	96906	SCREW,MACHINE	EA	3
20	12	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	5
20	13	XDOZZ		SCC125537	80063	PAPER SLIDE	EA	1
20	14	XDFZZ		SCB125525-1	80063	BRACKET,RIGHT HAND	EA	1
20	15	PAFZZ	5305-00-869-4104	SCB125524	80063	SCREW,MACHINE	EA	2
20	16	PAOZZ	6660-00-322-4639	SCB125510	80063	SCALE	EA	1
20	17	PAOZZ	5305-00-611-7534	SCB125531	80063	SCREW,MACHINE	EA	2
20	18	PAFZZ	5305-00-889-3118	MS35206-203	96906	SCREW,MACHINE	EA	9
20	19	PAFZZ	5310-00-045-5201	MS15795-902	96906	WASHER,FLAT	EA	7
20	20	PAFZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT	EA	23
20	21	PAFZZ	5305-00-889-3000	MS35206-230	96906	SCREW,MACHINE	EA	10
20	22	XDFZZ		SCB125526	80063	HOLDER	EA	3

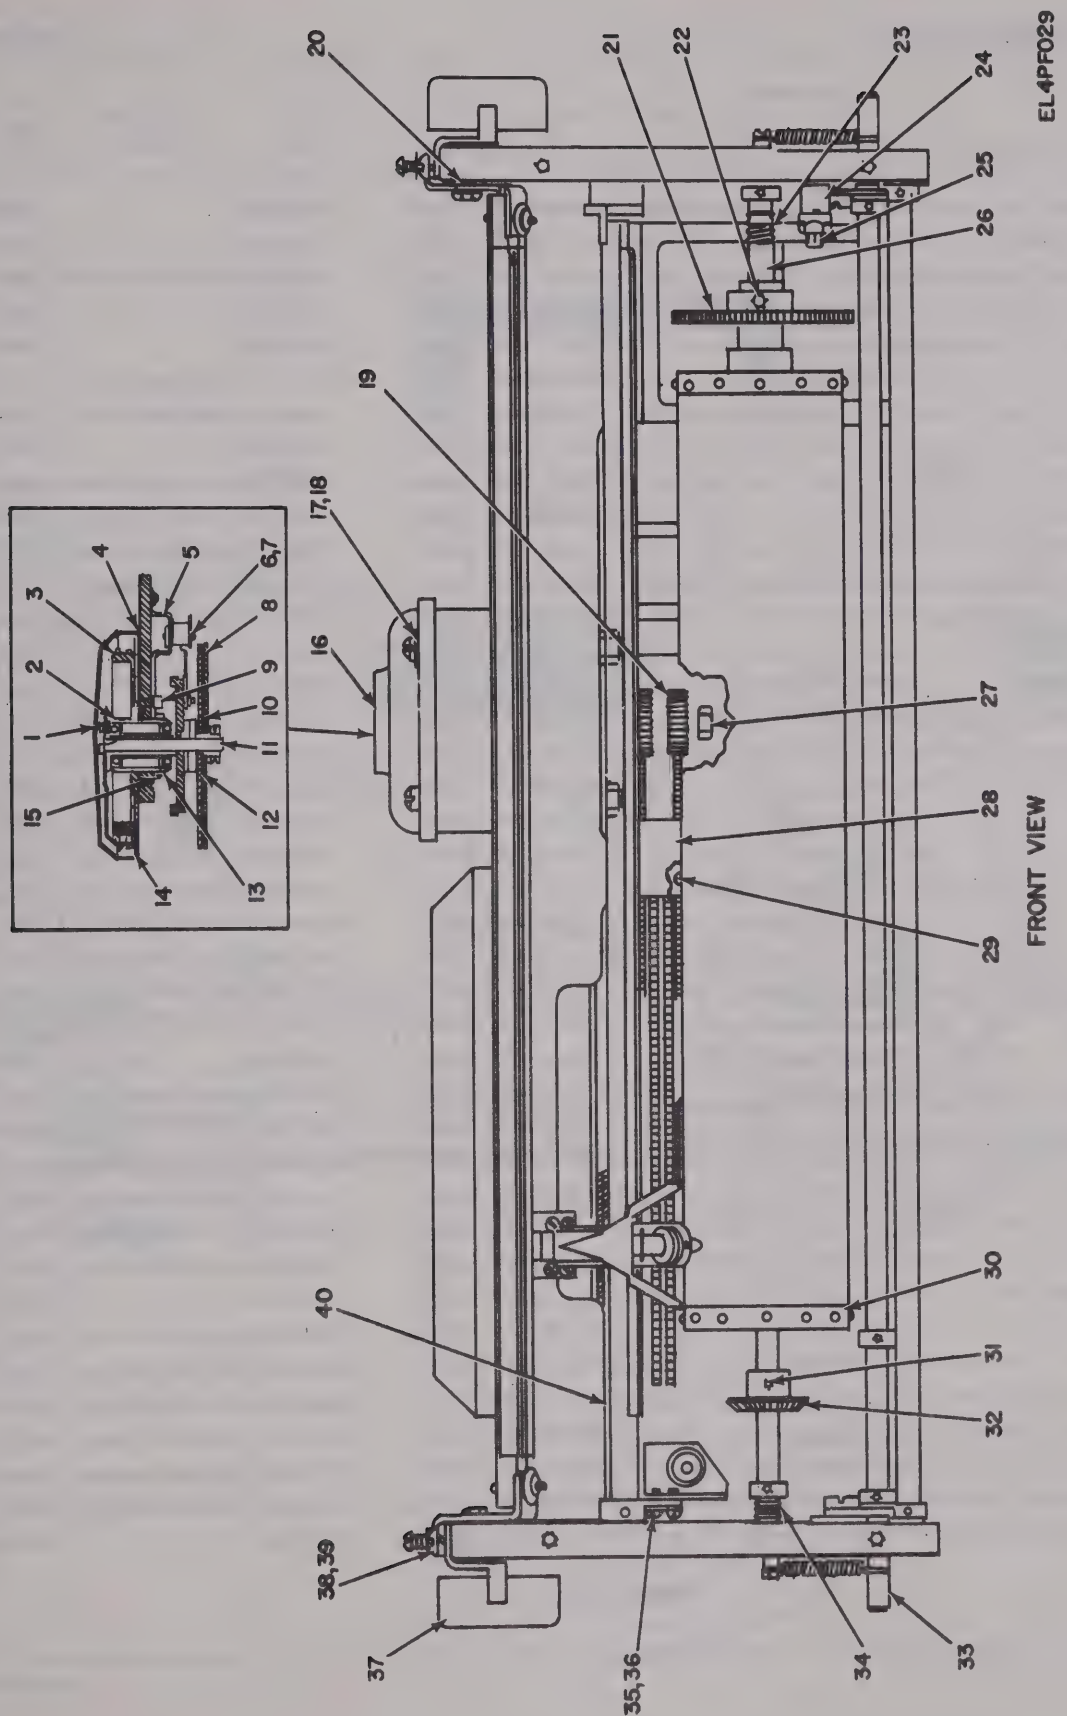

Figure 21. Recorder, Frequency Time RD-88C/TMQ-5, Frame Assembly, Front and Top Views (Sheet 1 of 2).

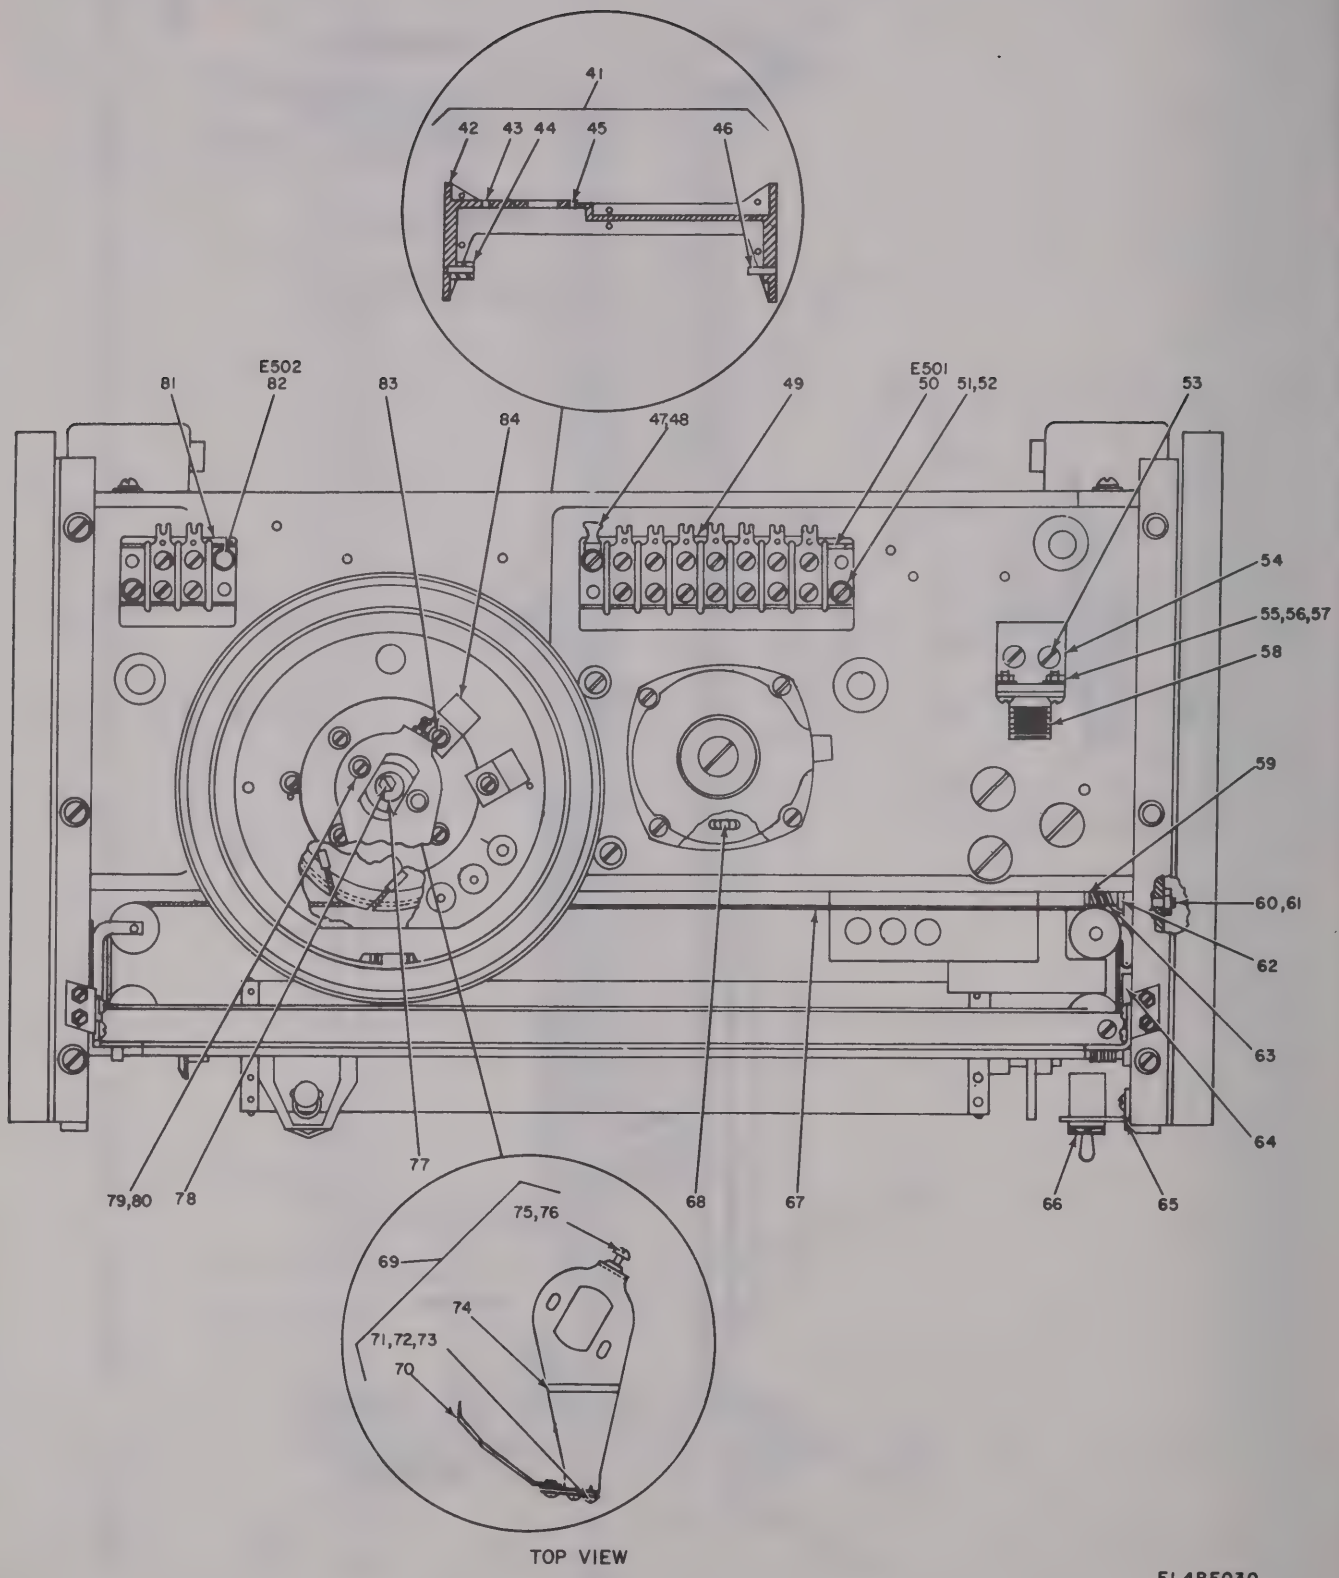

Figure 21. Recorder, Frequency Time RD-88C/TMQ-5, Frame Assembly, Front and Top Views (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	1	XDFZZ		SCB125763	80063	COVER ASSEMBLY	EA	1
21	2	XDFFF		SMB133931	80063	HUB ASSEMBLY	EA	1
21	3	PAFZZ	5905-00-092-8732	SCC125756	80063	SLIDE WIRE ASSEMBLY	EA	1
21	4	XDFZZ		SCB125611	80063	DISC	EA	1
21	5	XDFFF		SCB125784	80063	BRACKET ASSEMBLY	EA	1
21	6	PAFZZ	5305-00-984-6191	MS35206-243	96906	SCREW,MACHINE	EA	1
21	7	PAFZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	1
21	8	XDFFF		SCC125696	80063	PULLEY ASSEMBLY	EA	1
21	9	PAFZZ	6660-00-392-9717	SCB125623	80063	RANGE LIMIT STOP	EA	1
21	10	PAFZZ	5305-00-724-5805	MS51964-31	96906	SETSCREW	EA	1
21	11	PAFZZ	3040-00-463-9520	SCB125610	80063	SHAFT	EA	1
21	12	PAFZZ	5305-00-724-6792	MS51964-54	96906	SETSCREW	EA	1
21	13	PAFZZ	3040-00-541-4776	SCB125600	80063	COLLAR,SHAFT	EA	1
21	14	XDFZZ		SCC125612	80063	HOUSING	EA	1
21	15	PAFZZ	5305-00-719-5336	MS51963-33	96906	SETSCREW	EA	4
21	16	PAFZZ	6105-00-635-3071	SCC125663	80063	BAL MOTOR ASSY	EA	1
21	17	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	4
21	18	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	1
21	19	PAFZZ	3020-00-510-1866	SCB125590	80063	GEAR	EA	1
21	20	PAFZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT	EA	2
21	21	PAFZZ	3020-00-517-0504	SCB125587	80063	GEAR	EA	1
21	22	PAFZZ	5305-00-724-6794	MS51964-48	96906	SETSCREW	EA	2
21	23	PAFZZ	5360-00-306-2112	SCB125593	80063	SPRING	EA	1
21	24	PAFZZ	6660-00-378-5252	SCB125599	80063	COLLAR	EA	1
21	25	PAFZZ	5305-00-984-6197	MS35206-249	96906	SCREW,MACHINE	EA	1
21	26	XDFZZ		SCB125598	80063	SHAFT	EA	1
21	27	PAFZZ	4730-00-203-6585	SCB125591	80063	NUT,PLAIN,HEXAGON	EA	1
21	28	PAFFF	6660-00-898-7474	SCB125654	80063	GEAR ASSEMBLY	EA	1
21	29	PAFZZ	5305-00-984-6194	MS35206-246	96906	SCREW,MACHINE	EA	2
21	30	PAFZZ	6660-00-163-4929	SMC145647	80063	DRIVE ROLL ASSEMBLY	EA	1
21	31	PAFZZ	5305-00-724-6798	MS51964-49	96906	SETSCREW	EA	2
21	32	PAFZZ	6660-00-342-7253	SCB125595	80063	GEAR AND PINION	EA	1
21	33	XDFZZ		SCB125597	80063	GUIDE	EA	1
21	34	PAFZZ	5360-00-597-9039	SCB125596	80063	SPRING	EA	1
21	35	PAFZZ	5305-00-762-7482	MS35206-202	96906	SCREW,MACHINE	EA	2
21	36	PAFZZ	5310-00-543-5060	MS35338-39	96906	WASHER,LOCK	EA	2
21	37	XDFZZ	6660-00-513-0029	SCC125589	80063	SLIDE,LEFT	PR	1
21	38	PAFZZ	5305-00-989-7434	MS35207-263	96906	SCREW,MACHINE	EA	6
21	39	PAFZZ	5310-00-045-3296	MS35338-43	96906	WASHER,LOCK	EA	6
21	40	XDFZZ		SCB125674	80063	SHAFT ASSEMBLY	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	41	XDFFF		SMD133921	80063	FRAME ASSEMBLY	EA	1
21	42	XDFZZ		SMD133919	80063	FRAME	EA	1
21	43	PAFZZ	5340-00-765-2115	SCB125578	80063	INSERT	EA	3
21	44	PAFZZ	3120-00-005-8274	SCB125575	80063	BUSHING	EA	1
21	45	PAFZZ	5340-00-765-2118	SCB125577	80063	INSERT	EA	6
21	46	PAFZZ	3120-00-009-3963	SCB125576	80063	BUSHING	EA	1
21	47	PAFZZ	5940-00-298-2109	2120-06-00	78189	TERMINAL,LUG	EA	1
21	48	PAFZZ	5305-00-889-3001	MS35206-231	96906	SCREW,MACHINE	EA	2
21	49	XDFZZ		SCB125748	80063	STRIP,MARKING	EA	1
21	50	PAFZZ	5940-00-983-6085	38TB7	81349	BOARD,TERMINAL	EA	1
21	51	PAFZZ	5305-00-889-3001	MS35225-31	96906	SCREW,MACHINE	EA	1
21	52	PAFZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	2
21	53	PAFZZ	5305-00-984-4988	MS35206-228	96906	SCREW,MACHINE	EA	2
21	54	XDFZZ		SMB133914	80063	BRACKET,CONNECTOR	EA	1
21	55	PAFZZ	5305-00-889-2997	MS35206-215	96906	SCREW,MACHINE	EA	8
21	56	PAFZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	2
21	57	PAFZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	2
21	58	PAFZZ	5935-00-283-2916	MS2102A10SL4P	96906	RECEPTACLE	EA	1
21	59	XDFZZ		SCB125620	80063	BUSHING	EA	1
21	60	PAFZZ	5305-00-292-2303	SCB125585	80063	SCREW,MACHINE	EA	1
21	61	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	1
21	62	PAFZZ	5310-00-378-5143	SCB125584	80063	BUSHING	EA	1
21	63	XDFZZ		SCB125583	80063	SPRING	EA	1
21	64	PAFZZ	5365-00-822-4498	SCB125586	80063	SHIM	EA	1
21	65	XDFZZ		SMB133916	80063	BRACKET,SWITCH	EA	1
21	66	PAFZZ	5930-00-655-1523	MS35058-31	96906	SWITCH,TOGGLE	EA	1
21	67	PAFZZ	6660-00-377-0176	SCB125626	80063	WIRE,ROPE ASSEMBLY	EA	1
21	68	PAFZZ	5360-00-333-2966	SCB125755	80063	SPRING	EA	3
21	69	XDFFF		SMB133933	80063	CONTACT ASSEMBLY	EA	1
21	70	XDFZZ		SCB125686	80063	CONTACT ASSEMBLY	EA	1
21	71	PAFZZ	5305-00-889-3118	MS35206-203	96906	SCREW,MACHINE	EA	4
21	72	PAFZZ	5310-00-582-9461	MS15795-202	96906	WASHER,FLAT	EA	4
21	73	PAFZZ	5310-00-543-5060	MS35338-39	96906	WASHER,LOCK	EA	4
21	74	XDFZZ		SMB133907	80063	ARM	EA	1
21	75	PAFZZ	5310-00-934-6738	MS35649-22	96906	NUT,PLAIN,HEXAGON	EA	7
21	76	PAFZZ	5305-00-988-1167	MS35206-204	96906	SCREW,MACHINE	EA	1
21	77	PAFZZ	6660-00-712-8431	SCB125608	80063	CLAMP	EA	1
21	78	XDFZZ		SCB125607	80063	SCREW	EA	1
21	79	PAFZZ	5305-00-882-5932	SCB125609	80063	SCREW,MACHINE	EA	2
21	80	PAFZZ	5310-00-765-2039	SCB125518-1	80063	WASHER,FLAT	EA	2

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
21	81	XDFZZ		MSX7141	71785	STRIP,MARKING	EA	1
21	82	PAFZZ	5940-00-983-6115	38TB2	81349	BOARD,TERMINAL	EA	1
21	83	PAFZZ	5305-00-889-3000	MS35206-230	96906	SCREW,MACHINE	EA	4
21	84	XDFZZ		1036	71785	CLAMP	EA	2

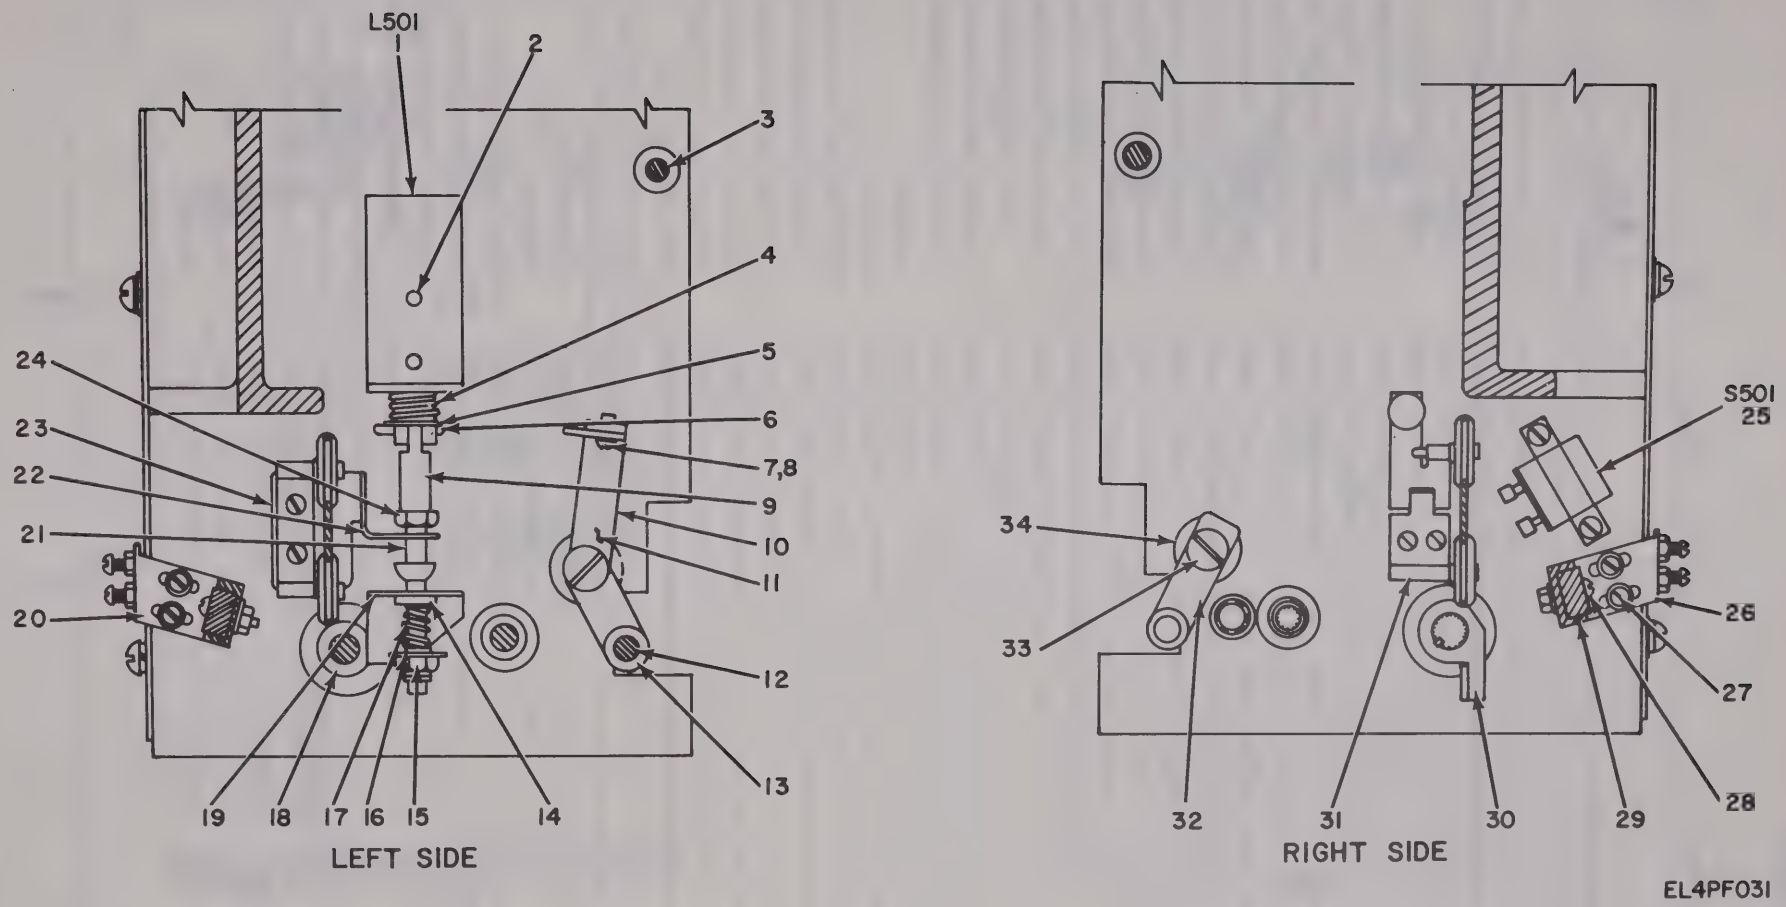

Figure 22. Recorder, Frequency Time RD-88C/TMQ-5, Frame Assembly, Side Views (Sheet 1 of 2).

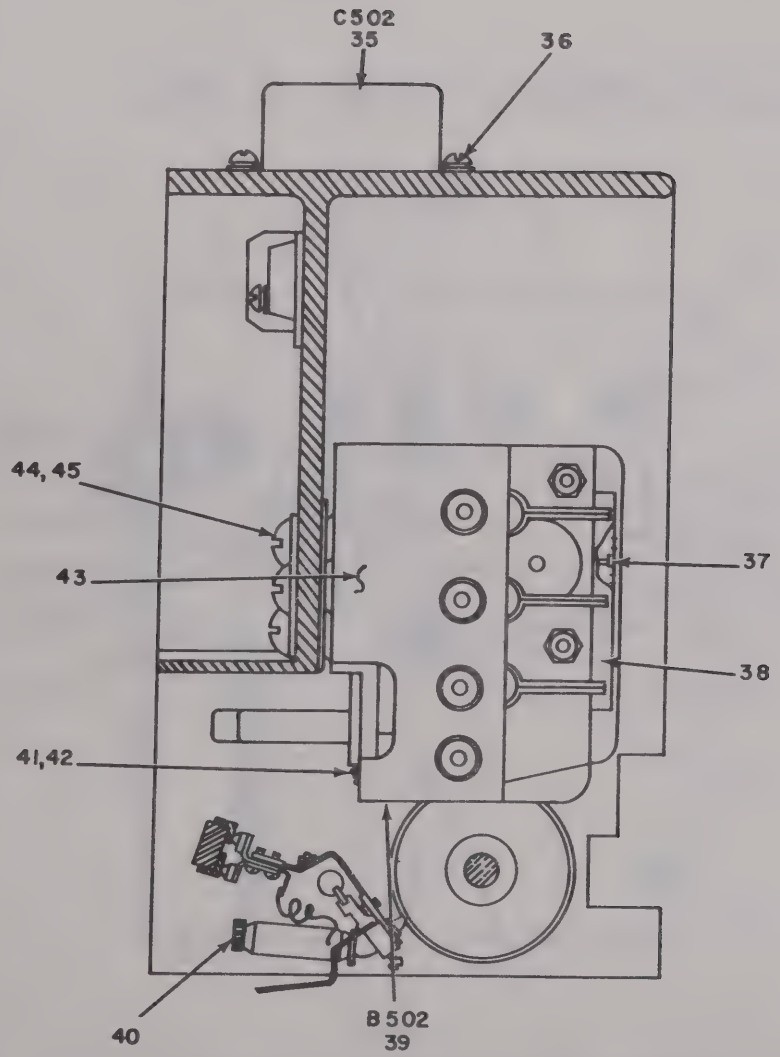

LEFT SIDE ADDITIONAL PARTS LOCATION

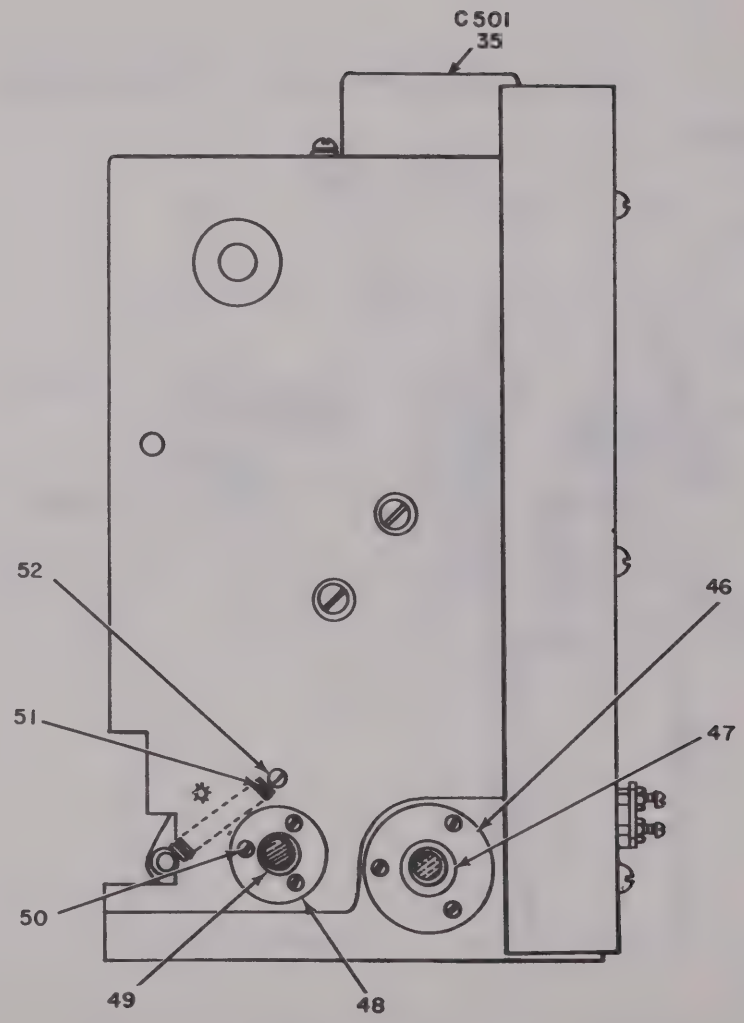

RIGHT SIDE ADDITIONAL PARTS LOCATION

EL4PF032

Figure 22. Recorder, Frequency Time RD-88C/TMQ-5, Frame Assembly, Side Views (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
22	1	PAFZZ	5945-00-523-5723	SCC125619	80063	SOLENOID	EA	1
22	2	PAFZZ	5305-00-984-6193	MS35206-245	96906	SCREW,MACHINE	EA	2
22	3	XDFZZ		SCB125618	80063	GUIDE	EA	1
22	4	PAFZZ	5360-00-376-9565	SCB125617	80063	SPRING	EA	1
22	5	PAFZZ	5310-00-457-1600	15126	82205	WASHER,FLAT	EA	1
22	6	PAFZZ	5315-00-846-0405	MS9245-44	96906	PIN,COTTER	EA	1
22	7	PAFZZ	5305-00-762-7482	MS35206-202	96906	SCREW,MACHINE	EA	1
22	8	PAFZZ	5310-00-543-5060	MS35338-39	96906	WASHER,LOCK	EA	1
22	9	PAFZZ	5340-00-292-3703	SCB125616	80063	LINK	EA	1
22	10	PAFFF	5340-00-611-7544	SCB125781	80063	LEVER ASSEMBLY	EA	1
22	11	PAFZZ	6660-00-370-3728	SCB125782	80063	LEVER	EA	1
22	12	PAFZZ	5305-00-719-5329	MS51963-20	96906	SETSCREW	EA	15
22	13	PAFZZ	3040-00-288-3010	SCB125592	80063	COLLAR	EA	7
22	14	PAFZZ	5310-00-378-5142	SCB125604	80063	BUSHING	EA	1
22	15	PAFZZ	5310-00-061-7326	MS21045-3	96906	NUT,SELF-LOCKING	EA	1
22	16	PAFZZ	5310-00-457-1519	15128	82205	WASHER,FLAT	EA	7
22	17	PAFZZ	5360-00-597-9098	SCB125603	80063	SPRING	EA	1
22	18	PAFZZ	6660-00-370-3727	SCB125601	80063	LEVER	EA	1
22	19	XDFZZ		SCB125602	80063	BRACKET	EA	1
22	20	XDFZZ		SCB125588-2	80063	BRACKET,LEFT HAND	EA	1
22	21	PAFZZ	5307-00-005-1052	SC-B-125605	80063	BOLT	EA	1
22	22	PAFZZ	6625-00-392-9716	SCB125606	80063	STOP PLUNGER	EA	1
22	23	PAFFF	6660-00-712-8432	SCB125659	80063	PULLEY ASSEMBLY	EA	1
22	24	PAFZZ	5310-00-934-9751	MS35650-102	96906	NUT,PLAIN,HEXAGON	EA	1
22	25	PAFZZ	5930-00-249-6518	SMB133917	80063	SWITCH,THERMOSTATIC	EA	1
22	26	XDFZZ		SCB125588-1	80063	BRACKET,RIGHT HAND	EA	1
22	27	PAFZZ	5305-00-889-2998	MS35206-216	96906	SCREW,MACHINE	EA	4
22	28	PAFZZ	5305-00-983-6730	MS35206-218	96906	SCREW,MACHINE	EA	2
22	29	XDFFF		SCC125651	80063	CONTACT ASSEMBLY	EA	1
22	30	XDFZZ		SCB125671	80063	LEVER ASSEMBLY	EA	1
22	31	XDFFF	6660-00-712-8433	SCB125667	80063	PULLEY ASSEMBLY	EA	1
22	32	XDFZZ	6660-00-663-7914	SCB125594	80063	ARM	EA	1
22	33	PAFZZ	5305-00-206-5555	SCB123615	80063	SCREW	EA	2
22	34	PAFZZ	5310-00-457-1587	15127	82205	WASHER,FLAT	EA	2
22	35	PAFZZ	5910-00-129-6260	CP538IEF105V1	81349	CAPACITOR	EA	2
22	36	PAFZZ	5305-00-984-4983	MS35206-226	96906	SCREW,MACHINE	EA	5
22	37	PAFZZ	5305-00-959-0379	NS16995-10	96906	SCREW,CAP	EA	6
22	38	XDFZZ		SMB374470	80063	BAR,WIRE CLAMP	EA	1
22	39	XDFFD		SMC145650	80063	CHART DRIVE	EA	1
22	40	XDDFD		SMC133890	80063	PEN,CHG ASSEMBLY	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
22	41	PAFZZ	5305-00-054-5647	MS35233-13	96906	SCREW,MACHINE	EA	1
22	42	PAFZZ	5310-00-933-8118	MS35338-76	96906	WASHER,LOCK	EA	1
22	43	XDFFD		SMC429409	80063	DRIVE ASSEMBLY	EA	1
22	44	PAFZZ	5305-00-984-5676	MS35206-296	96906	SCREW,MACHINE	EA	3
22	45	PAFZZ	5310-00-407-9566	MS35338-45	96906	WASHER,LOCK	EA	3
22	46	PAFZZ	6660-00-338-0824	SC8125582	80063	RETAINER	EA	2
22	47	PAFZZ	3110-00-554-6678	77038X1	43334	BEARING,BALL	EA	2
22	48	XDFZZ		SC8125581	80063	PLATE	EA	2
22	49	XDFZZ		774X1	43334	BEARING,BALL	EA	2
22	50	PAFZZ	5305-00-993-0190	MS35206-214	96906	SCREW,MACHINE	EA	12
22	51	PAFZZ	5360-00-823-9260	SC8125580	80063	SPRING	EA	2
22	52	PAFZZ	5305-00-206-5275	SC8125579	80063	SCREW,MACHINE	EA	2

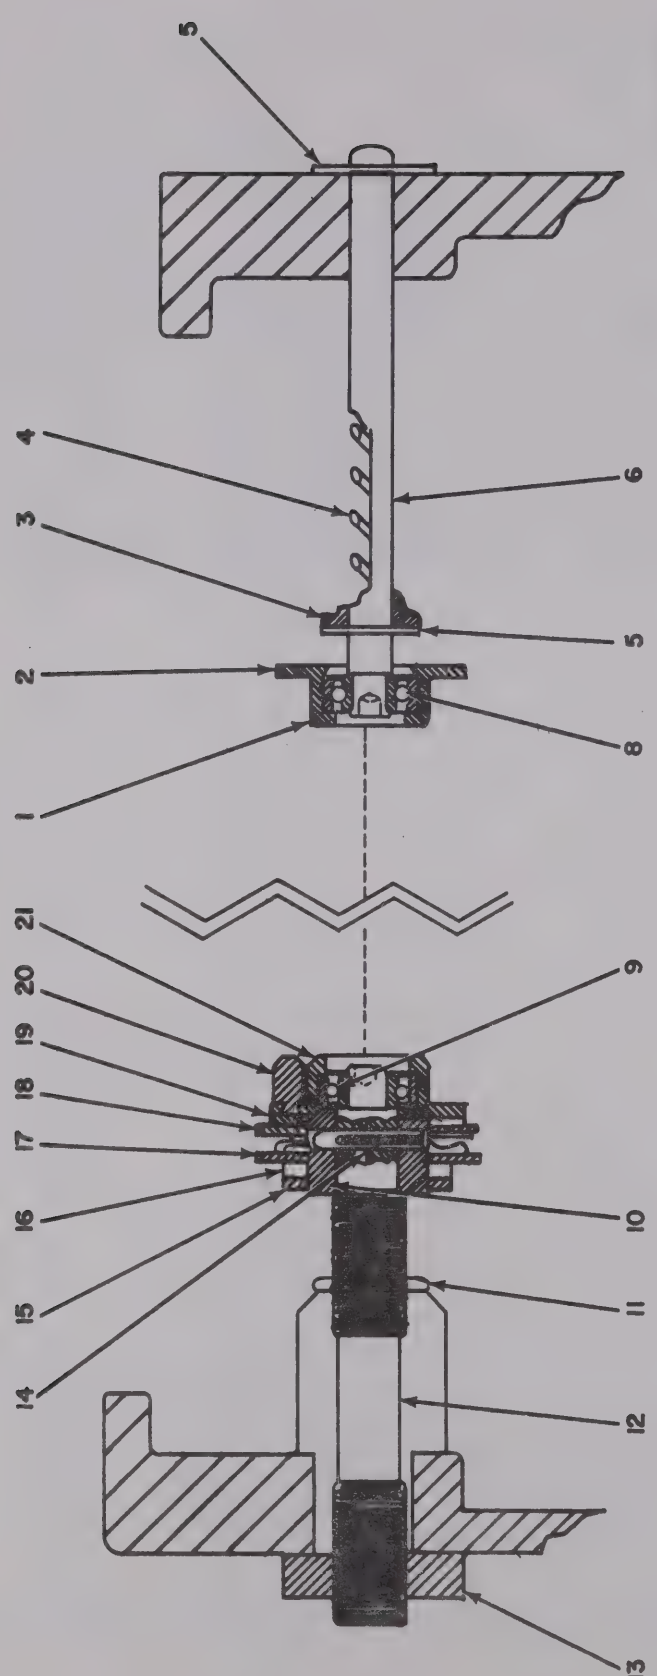

Figure 23. Recorder, Frequency Time RD-88C/TMQ-5, Shaft Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
23	1	PAFFF	6660-00-327-6481	SCB125779	80063	SHAFT ASSEMBLY	EA	2
23	2	XDFZZ		SCB125777	80063	FLANGE	EA	1
23	3	PAFZZ	5310-00-111-3657	SCB125613	80063	WASHER, SHOULDERED	EA	1
23	4	PAFZZ	5360-00-712-8426	SCB125614	80063	SPRING, HELICAL	EA	1
23	5	PAFZZ	5365-00-263-5917	MS16633-2025	96906	RING, RETAINING	EA	1
23	6	XDFZZ		SCB125780	80063	SHAFT	EA	1
23	8	PAFZZ	3110-00-198-2922	SS77R3X3E	43334	BEARING, BALL	EA	2
23	9	PAFZZ	3110-00-198-2922	SS77R3X3E	43334	BEARING, BALL, ANNULA	EA	1
23	10	XDFZZ		SCB125770	80063	BUSHING	EA	1
23	11	PAFZZ	5310-00-159-6321	MS35082-20	96906	NUT, PLAIN, HEXAGO	EA	1
23	12	PAFZZ	6660-00-712-8430	SCB125769	80063	SHAFT	EA	1
23	13	PAFZZ	5310-00-611-7526	SCB125621	80063	NUT, PLAIN, HEXAGON	EA	1
23	14	PAFZZ	5315-00-457-1469	GP3-109X562-14	73957	PIN, GROOVE	EA	1
23	15	PAFZZ	5310-00-763-0400	SCB125771	80063	NUT, PLAIN, HEXAGON	EA	1
23	16	PAFZZ	5310-00-765-2195	SCB125775	80063	NUT, PLAIN, HEXAGON	EA	1
23	17	PAFZZ	5310-00-682-5939	SCB125772	80063	WASHER, FLAT	EA	2
23	18	PAFZZ	5310-00-753-4038	SCB125773	80063	WASHER, SPRING	EA	1
23	19	PAFZZ	5310-00-687-7791	SCB125774	80063	WASHER, FLAT	EA	1
23	20	PAFFF	6660-00-771-2211	SCB125776	80063	FLANGE ASSEMBLY	EA	1
23	21	XDFFF		SCC125768	80063	SHAFT ASSEMBLY	EA	1

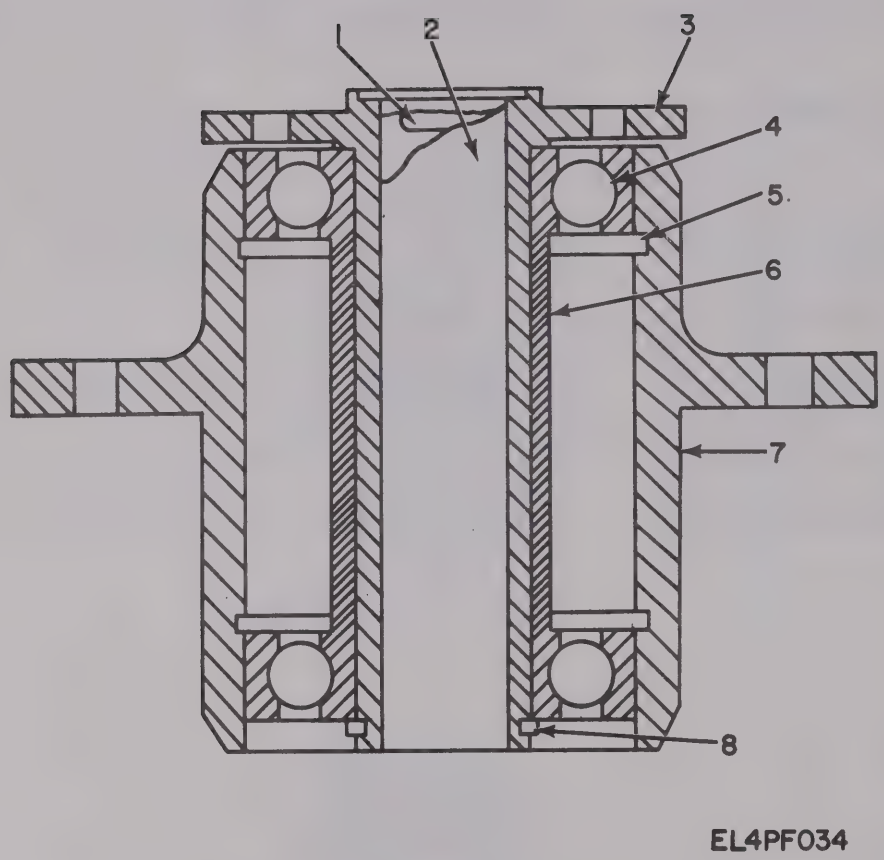

Figure 24. Recorder, Frequency Time RD-88C/TMQ-5, Hub Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
24	1	PAFZZ	3120-00-008-5811	SMC133930-1	80063	BUSHING	EA	1
24	2	PAFZZ	5315-00-498-6490	SCB125693	80063	PIN	EA	1
24	3	PAFFF	3120-00-473-9544	SMC133930	80063	BUSHING ASSEMBLY	EA	1
24	4	PAFZZ	3110-00-555-5449	R8T1	43334	BEARING,BALL	EA	2
24	5	PAFZZ	5365-00-801-2500	MS16625-1112	96906	RING,RETAINER	EA	2
24	6	PAFZZ	5365-00-712-8428	SCB125694	80063	SPACER	EA	1
24	7	PAFZZ	3040-00-463-5561	SCB125695	80063	HUB	EA	1
24	8	PAFZZ	5365-00-803-7301	MS16624-1050	96906	RING,RETAINING	EA	1

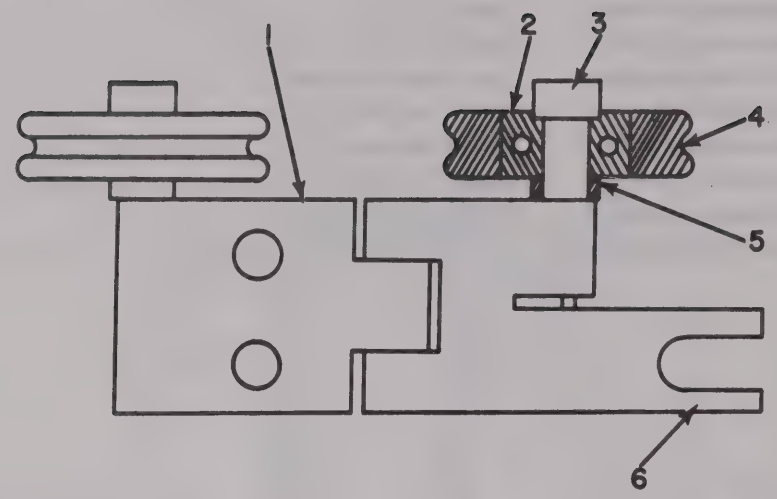

TOP VIEW

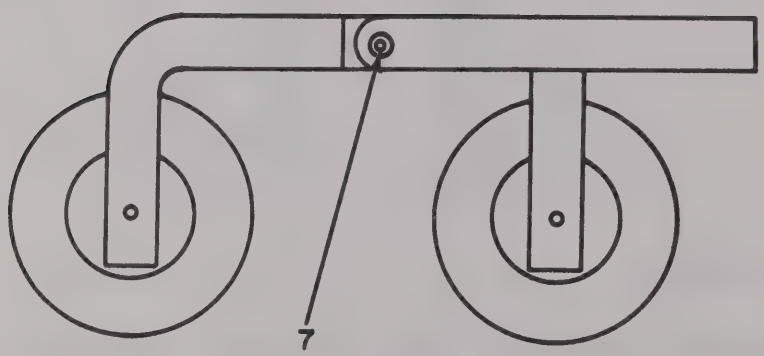

SIDE VIEW

EL4PF035

Figure 25. Recorder, Frequency Time RD-88C/TMQ-5, Pulley Assembly SCB125667.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
25	1	XDFZZ		SC8125669	80063	BRACKET	EA	1
25	2	XDFZZ		77R2X1	43334	BEARING,BALL	EA	2
25	3	PAFZZ	5315-00-007-1608	SC8125661	80063	STUD	EA	2
25	4	PAFZZ	3020-00-288-3405	SC8125662	80063	PULLEY	EA	2
25	5	PAFZZ	5365-00-392-5622	SC8125762	80063	SPACER	EA	2
25	6	XDFZZ		SC8125663	80063	BRACKET	EA	1
25	7	PAFZZ	5315-00-935-3711	MS16556-607	96906	PIN	EA	1

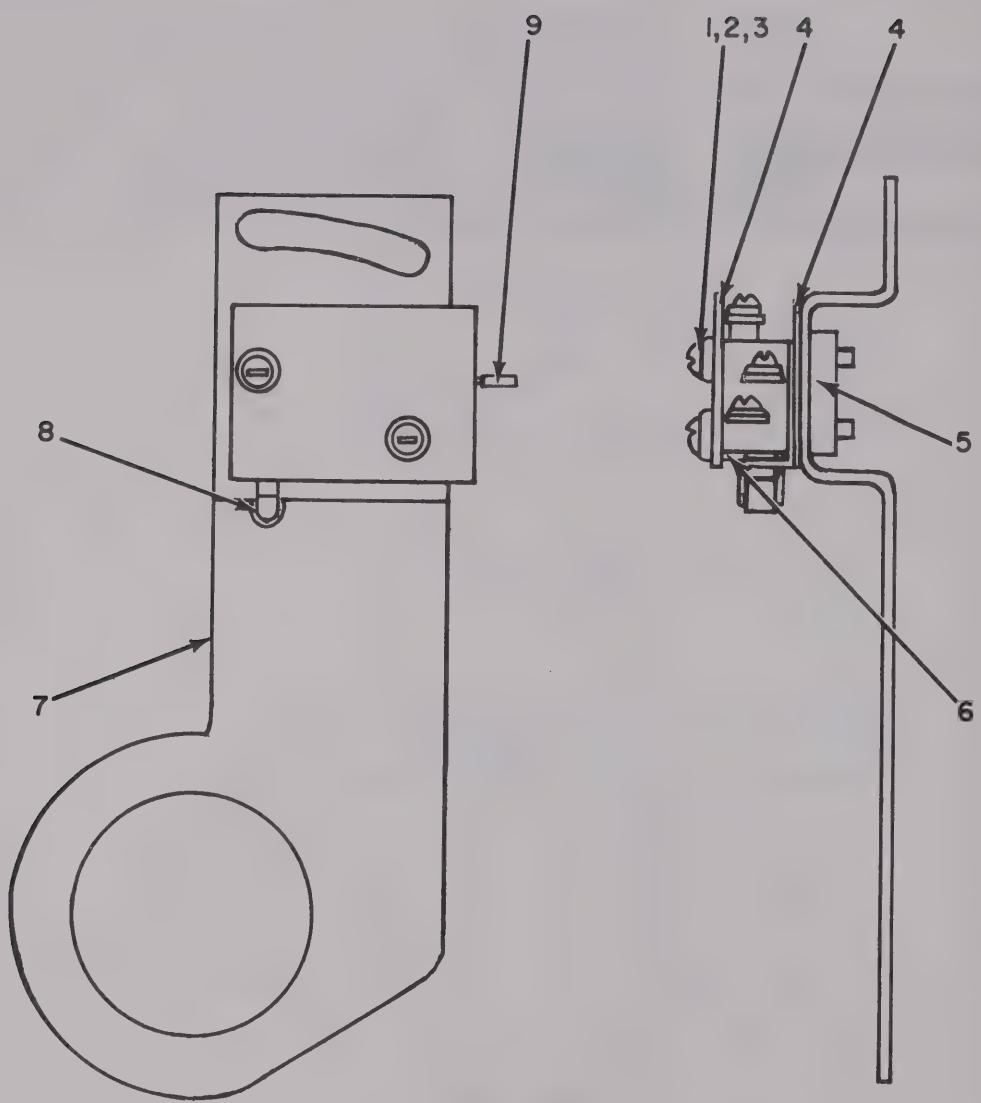

Figure 26. Recorder, Frequency Time RD-88C/TMQ-5, Bracket Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
26	1	PAFZZ	5305-00-984-4977	MS35206-220	96906	SCREW,MACHINE	EA	2
26	2	PAFZZ	5310-00-983-8483	MS27183-5	96906	WASHER	EA	2
26	3	PAFZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	2
26	4	PAFZZ	5970-00-588-9956	SCB125787	80063	INSULATOR	EA	2
26	5	PAFZZ	6660-00-342-7256	SCB125786	80063	NUT,PLAIN,HEXAGON	EA	1
26	6	PAFZZ	5930-00-833-5123	MS25253-2	96906	SWITCH	EA	1
26	7	PAFZZ	5340-00-465-8331	SCB125785	80063	BRACKET	EA	1
26	8	PAFZZ	5970-00-508-9956	JV5	80063	ACTUATOR	EA	1
26	9	PAFZZ	5940-00-867-7806	4007	77147	TERMINAL,LUG	EA	2

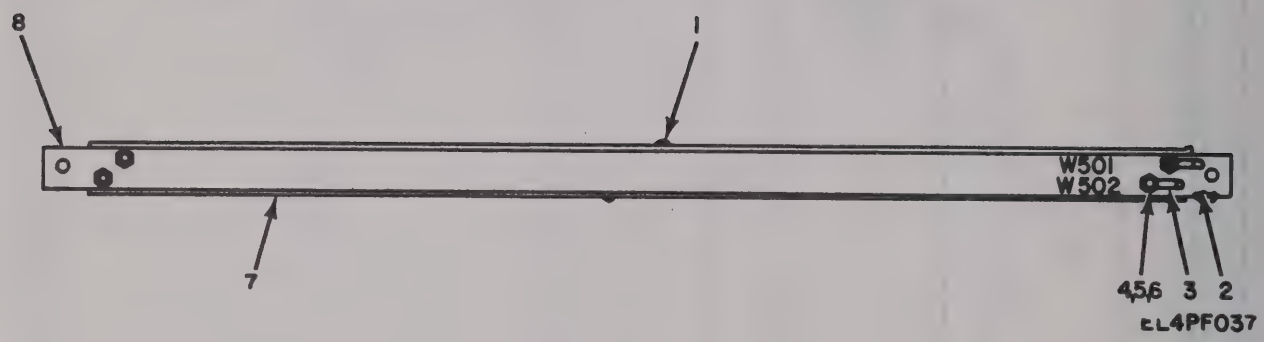

Figure 27. Recorder, Frequency Time RD-88C/TMQ-5, Contact Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
27	1	PAFZZ	5305-00-611-7527	25-0203	78189	SCREW	EA	2
27	2	PAFZZ	5310-00-543-5060	MS35338-39	96906	WASHER,LOCK	EA	2
27	3	PAFZZ	5940-00-585-1066	4029	77147	TERMINAL,LUG	EA	2
27	4	PAFZZ	5305-00-958-6381	MS35206-208	96906	SCREW,MACHINE	EA	4
27	5	PAFZZ	5310-00-045-5201	MS15795-902	96906	WASHER,FLAT	EA	4
27	6	PAFZZ	5310-00-934-9738	MS35649-22	96906	NUT,PLAIN,HEXAGON	EA	2
27	7	PAFZZ	6150-00-548-1713	SCB125653	80063	BUS BAR	EA	1
27	8	XDFZZ		SCC125652	80063	HOLDER	EA	1

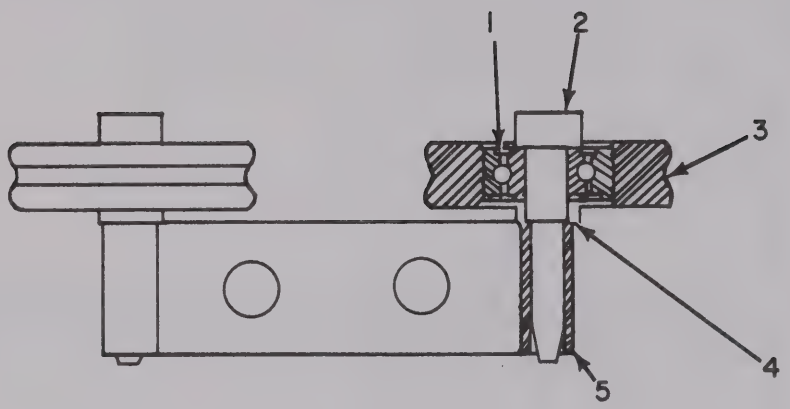

EL4PF038

Figure 28. Recorder, Frequency Time RD-88C/TMQ-5, Pulley Assembly SCB125659.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION *USABLE ON CODE*	(7) U/M	(8) QTY INC IN UNIT
28	1	XDFZZ		77R2X1	43334	BEARING,BALL	EA	8
28	2	PAFZZ	5315-00-007-1608	SCB125661	80063	STUD	EA	4
28	3	PAFZZ	3020-00-288-3405	SCB125662	80063	PULLEY	EA	4
28	4	PAFZZ	5365-00-392-5622	SCB125762	80063	SPACER	EA	4
28	5	XDFZZ		SCB125660	80063	BRACKET	EA	1

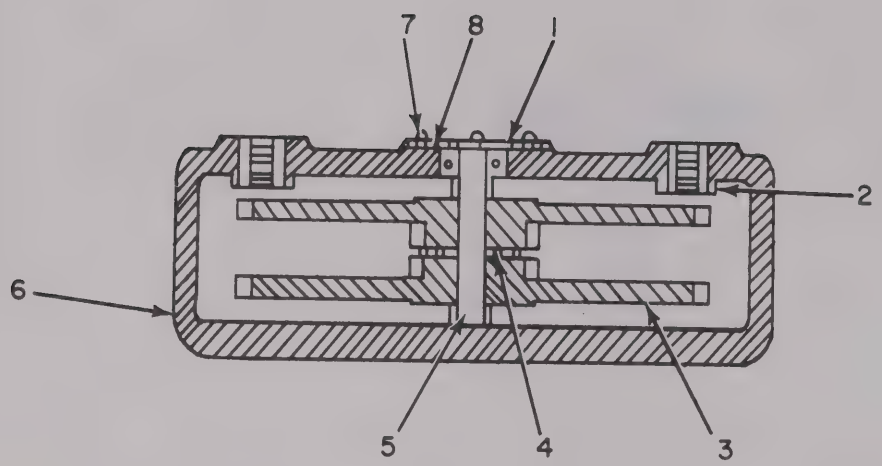

EL4PF039

Figure 29. Recorder, Frequency Time RD-88C/TMQ-5, Gear Assembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION *USABLE ON CODE*	(7) U/M	(8) QTY INC IN UNIT
29	1	XDFZZ		77R2X1	43334	BEARING,BALL	EA	1
29	2	PAFZZ	5340-00-765-2115	SCB125578	80063	INSERT	EA	5
29	3	PAFZZ	6660-00-508-7633	SCB125657	80063	GEAR ASSEMBLY	EA	2
29	4	PAFZZ	5310-00-853-6477	SCB125518-5	80063	WASHER,FLAT	EA	1
29	5	PAFZZ	6660-00-373-2839	SCB125656	80063	SHAFT	EA	1
29	6	XDFZZ		SCB125655	80063	CASTING	EA	1
29	7	PAFZZ	5305-00-957-6644	MS35190-220	96906	SCREW,MACHINE	EA	6
29	8	PAFZZ	6660-00-392-6150	SCB125636	80063	RETAINER	EA	2

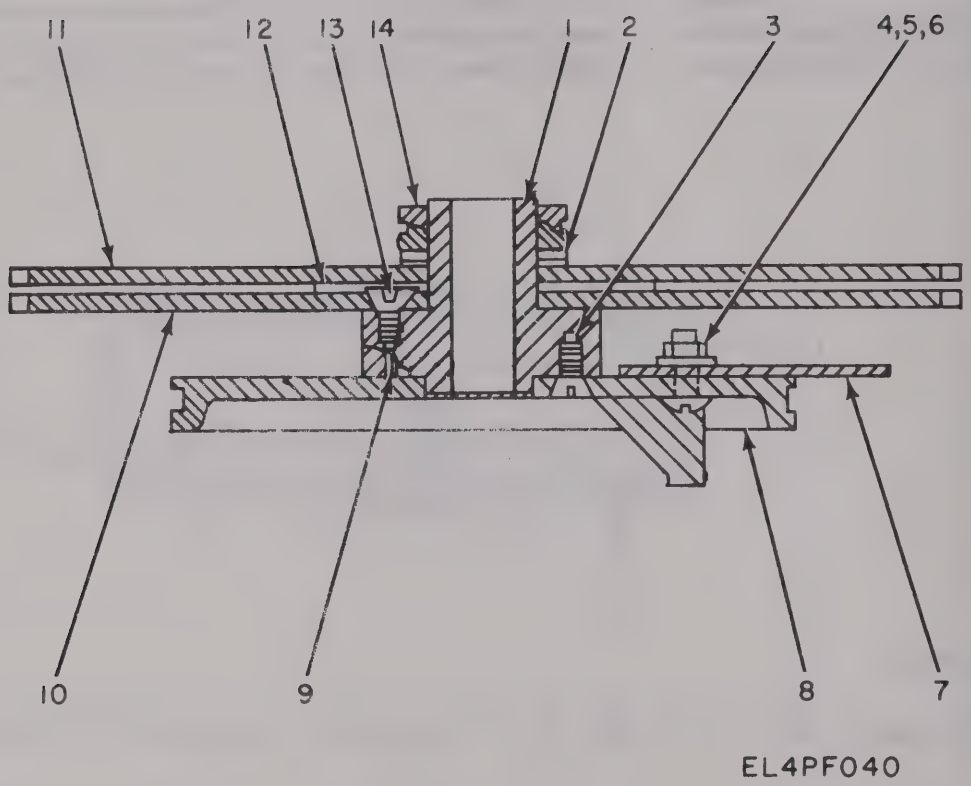

Figure 30. Recorder. Frequency Time RD-88C/TMQ-5, Pulley Assembly SCC125696.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
30	1	PAFZZ	6660-00-370-3721	SCB125697	80063	BUSHING	EA	1
30	2	PAFZZ	5310-00-753-4447	SCB125753	80063	WASHER	EA	1
30	3	PAFZZ	5305-00-059-4550	MS35190-235	96906	SCREW,MACHINE	EA	3
30	4	PAFZZ	5305-00-984-4989	MS35206-229	96906	SCREW,MACHINE	EA	2
30	5	PAFZZ	5310-00-045-4007	MS35338-61	96906	WASHER,LOCK	EA	2
30	6	PAFZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	2
30	7	PAFZZ	6680-00-392-9132	SCB125699	80063	CAM	EA	1
30	8	PAFZZ	3020-00-640-4659	SCC125698	80063	PULLEY	EA	1
30	9	XDFZZ		MS35647-10	96906	PIN	EA	2
30	10	PAFZZ	3020-00-204-2420	SCC125750	80063	GEAR	EA	1
30	11	PAFZZ	3020-00-288-3309	SCC125752	80063	GEAR	EA	1
30	12	PAFZZ	5310-00-285-6582	SCB125751	80063	WASHER,FLAT	EA	1
30	13	PAFZZ	5305-00-957-6265	MS35190-234	96906	SCREW,MACHINE	EA	3
30	14	XDFZZ		SCB125754	80063	NUT	EA	2

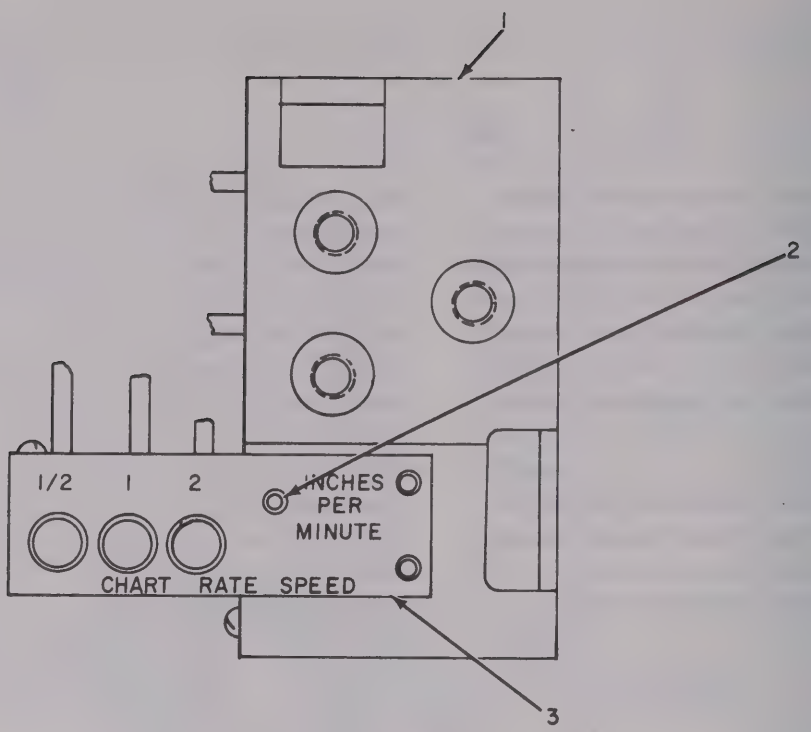

DRIVE ASSEMBLY

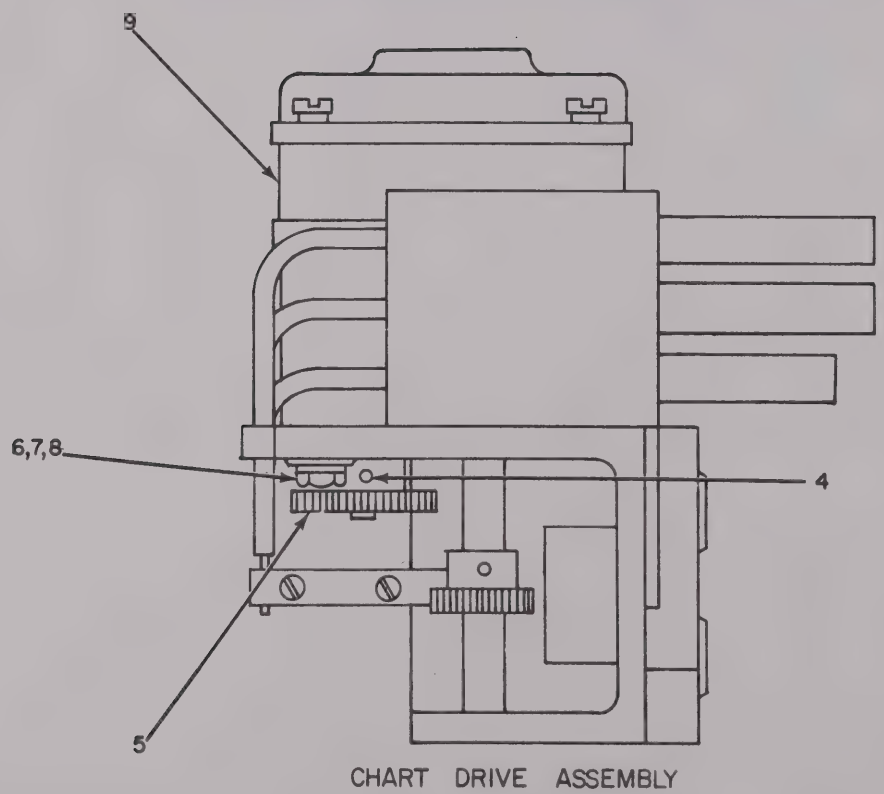

CHART DRIVE ASSEMBLY

EL4PF041

Figure 31. Recorder, Frequency Time RD-88C/TMQ-5, Drive and Chart Drive Assemblies.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
31	1	XDFFD		SMD204943	80063	HOUSING ASSEMBLY	EA	1
31	2	PAFZZ	5305-00-068-5276	MS16995-9	96906	SCREW,CAP	EA	3
31	3	PAFFF	6660-00-163-4919	SMC374486	80063	DRIVE SUBASSEMBLY	EA	1
31	4	PAFZZ	5305-00-931-3143	MS18063-2	96906	SETSCREW	EA	2
31	5	PAFZZ	3020-00-855-6789	SMB149656	80063	GEAR	EA	1
31	6	PAFZZ	5310-00-934-9757	MS35649-282	96906	NUT,PLAIN,HEXAGON	EA	3
31	7	PAFZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT	EA	3
31	8	PAFZZ	5310-00-045-3299	MS35338-42	96906	WASHER,LOCK	EA	3
31	9	PAFZZ	3010-00-643-4662	SCC125633	80063	MOTOR ASSEMBLY	EA	1

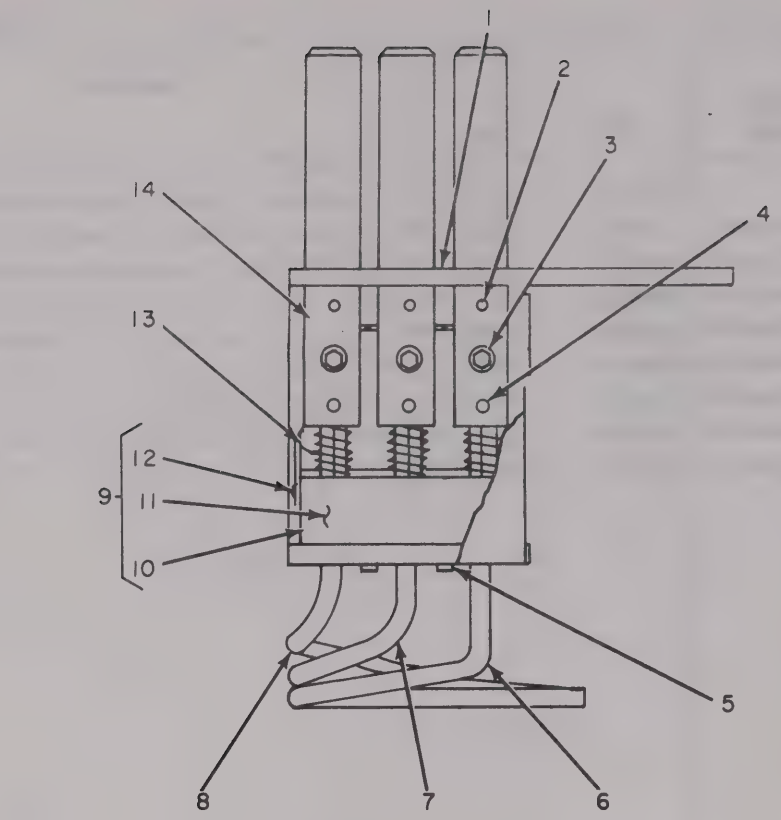

FRONT VIEW

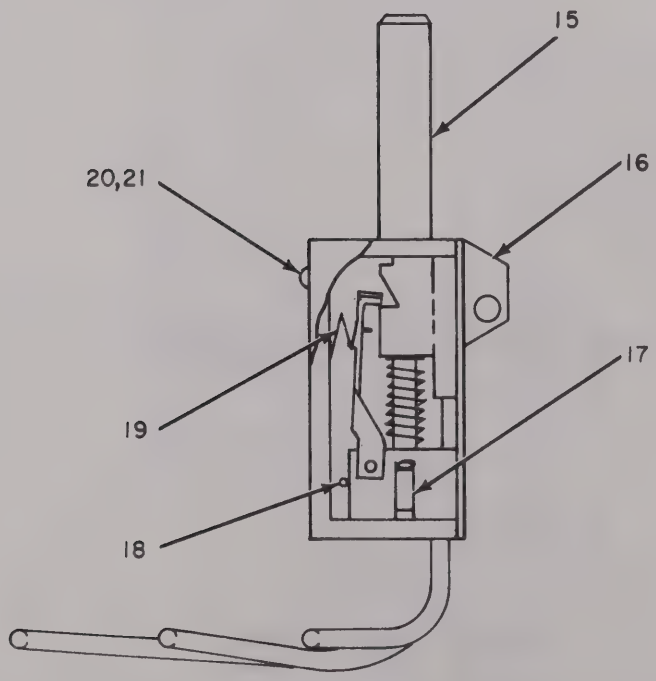

SIDE VIEW

EL4PF042

Figure 32. Recorder, Frequency Time RD-88C/TMQ-5, Drive Subassembly.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
32	1	XDFZZ		SMC374480	80063	PLATE,MOUNTING	EA	1
32	2	PAFZZ	5315-00-769-1402	SMB374487-1	80063	PIN	EA	3
32	3	PAFZZ	5305-00-978-9542	MS16997-9	96906	SCREW	EA	3
32	4	PAFZZ	5305-00-926-5637	MS18063-1	96906	SETSCREW	EA	3
32	5	PAFZZ	5305-00-978-9543	MS16997-10	96906	SCREW,MACHINE	EA	2
32	6	PAFZZ	4460-00-162-4460	SMB374478-3	80063	TUBE SUBASSEMBLY	EA	1
32	7	PAFZZ	4460-00-162-4461	SMB374478-2	80063	TUBE SUBASSEMBLY	EA	1
32	8	PAFZZ	4460-00-162-4463	SMB374478-1	80063	TUBE SUBASSEMBLY	EA	1
32	9	XDFFF		SMB374485	80063	CATCH ASSEMBLY	EA	1
32	10	PAFZZ	4660-00-176-0080	SMB374484	80063	CATCH SUBASSEMBLY	EA	1
32	11	XDFZZ		SMC374481	80063	BLOCK	EA	1
32	12	PAFZZ	5305-00-253-5607	MS21318-8	96906	SCREW,DRIVE	EA	2
32	13	PAFZZ	5360-00-289-2005	SMB374472	80063	SPRING	EA	3
32	14	PAFZZ	4660-00-176-0081	SMB374474	80063	BLOCK	EA	3
32	15	PAFZZ	3040-00-285-4333	SMB374473	80063	SHAFT	EA	3
32	16	XDFZZ		SMB374471	80063	COVER	EA	1
32	17	XDFZZ		SMB374479	80063	SPACER BLOCK	EA	2
32	18	PAFZZ	5315-00-769-1398	SMB374487-2	80063	PIN	EA	2
32	19	PAFZZ	5360-00-769-1212	SMB374475	80063	SPRING	EA	1
32	20	PAFZZ	5305-00-889-3116	MS35206-213	96906	SCREW,MACHINE	EA	2
32	21	PAFZZ	5310-00-193-7577	MS35333-36	96906	WASHER,LOCK	EA	2

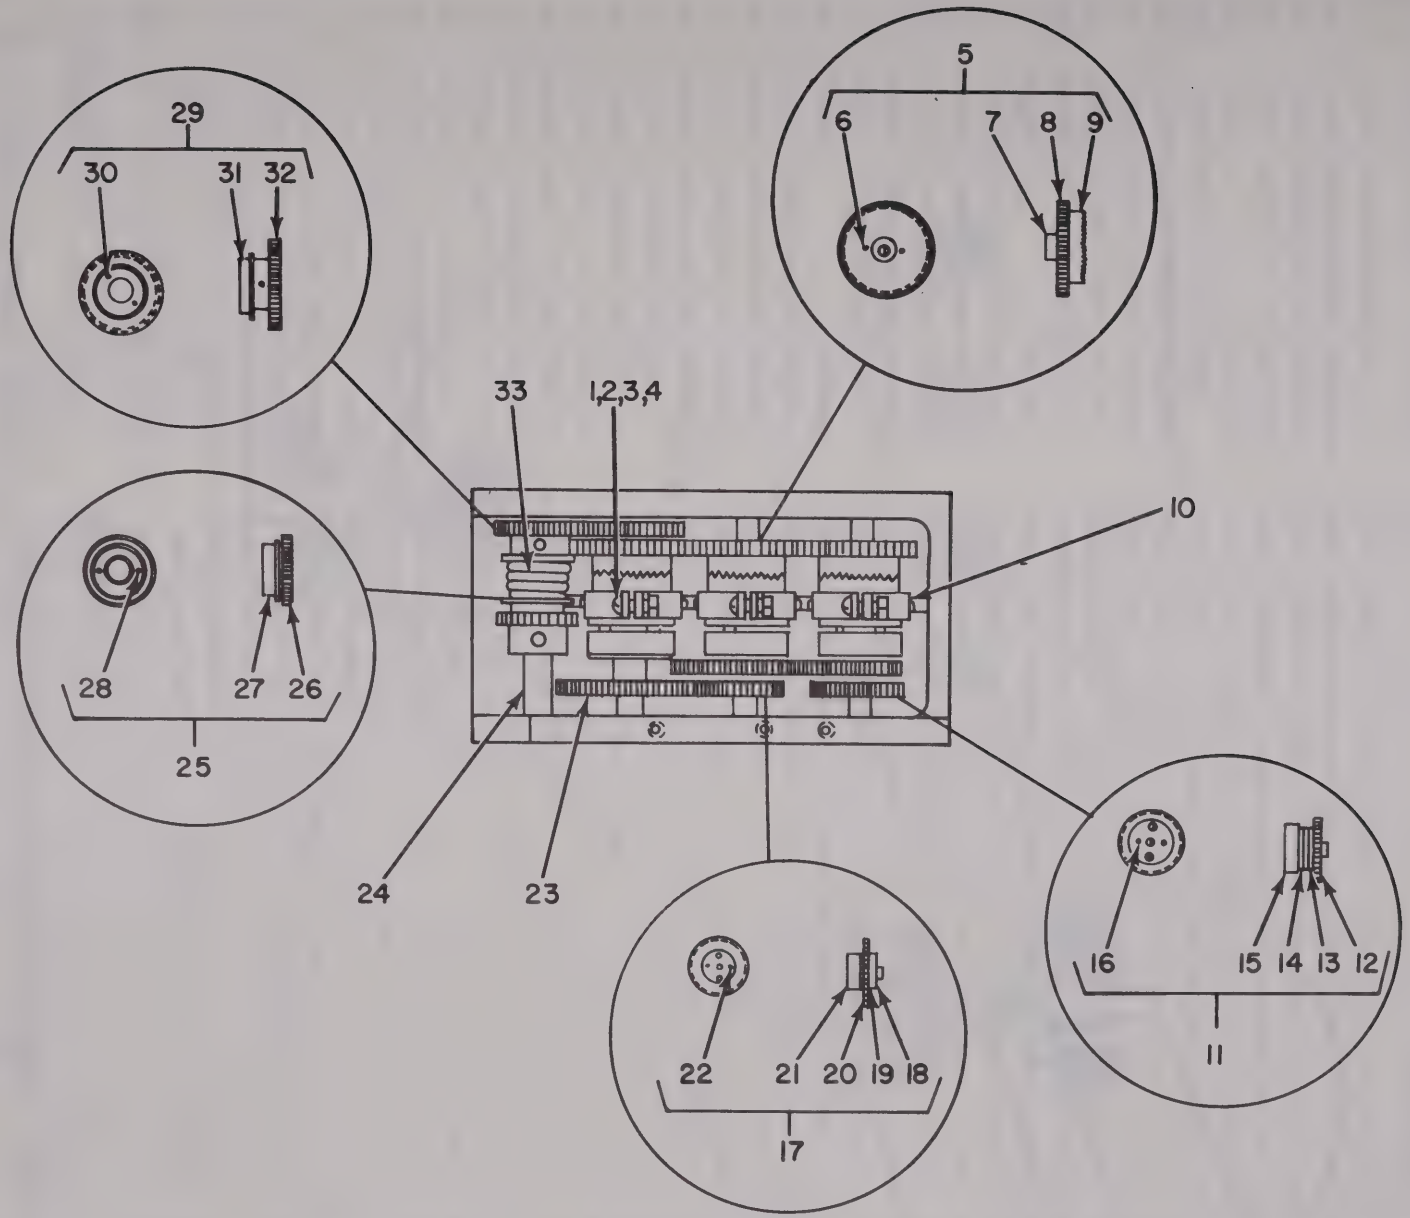

Figure 33. Recorder, Frequency Time RD-88C/TMQ-5, Housing Assembly (Sheet 1 of 2).

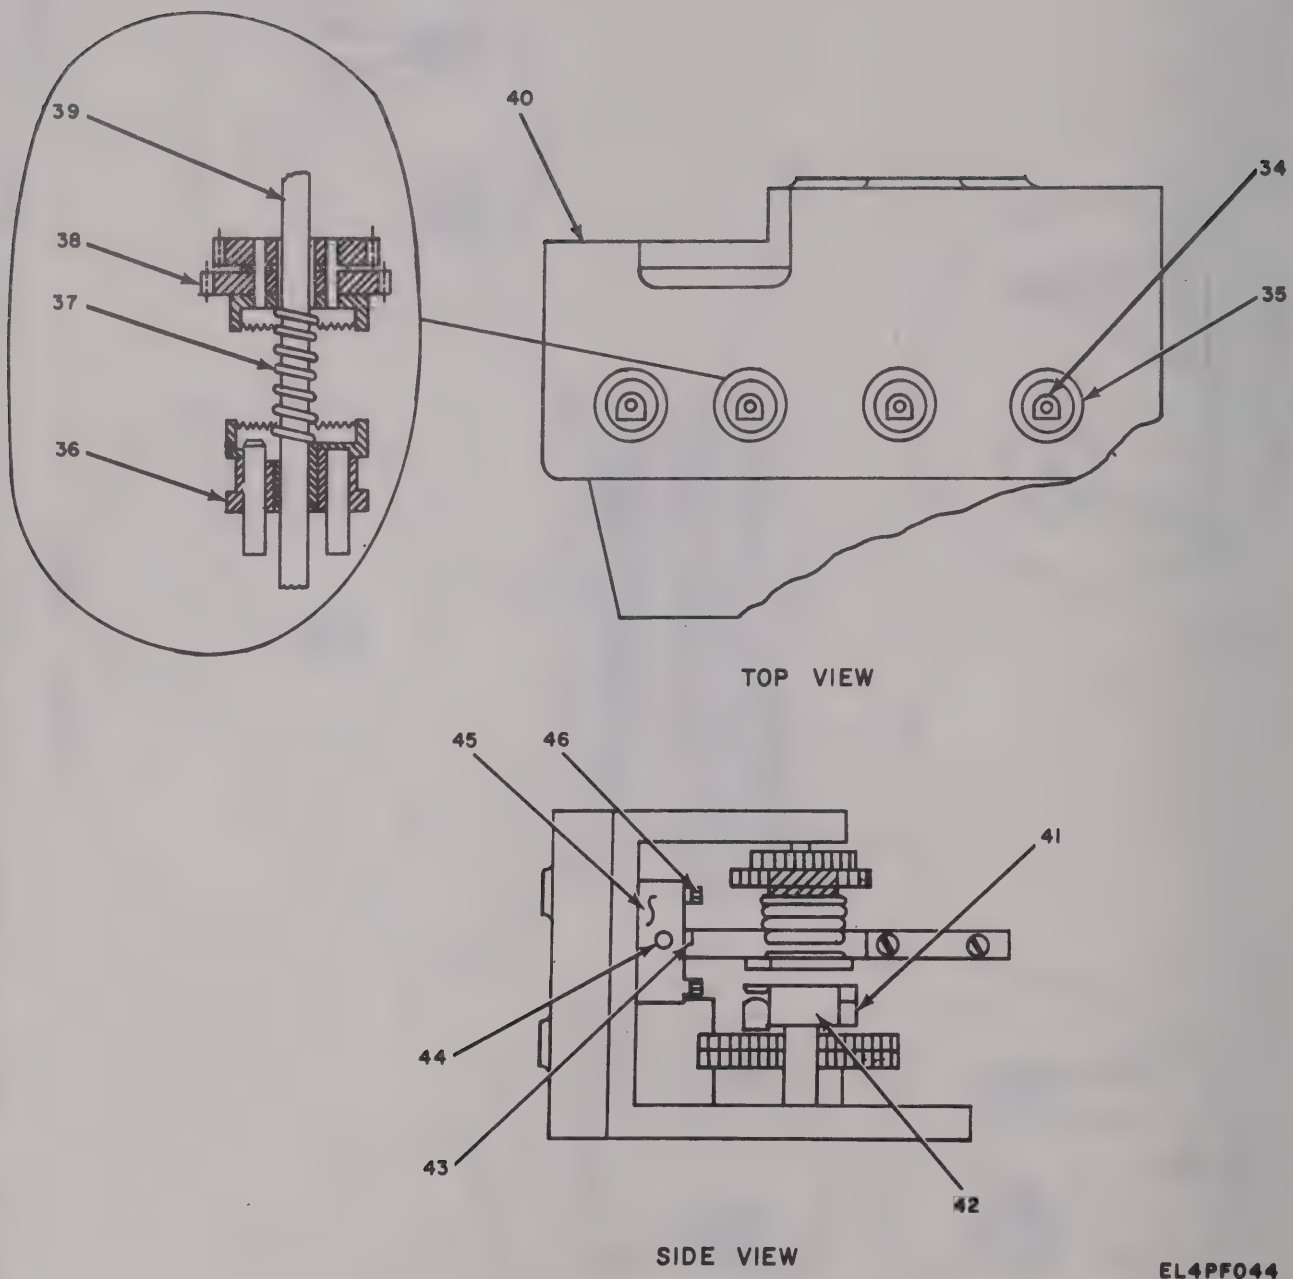

Figure 33. Recorder, Frequency Time RD-88C/TMQ-5, Housing Assembly (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
33	1	PAFZZ	5305-00-054-5648	MS51957-14	96906	SCREW	EA	6
33	2	PAFZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	7
33	3	PAFZZ	5310-00-271-4642	MS35649-44	96906	NUT,PLAIN,HEXAGON	EA	6
33	4	PAFZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT	EA	6
33	5	XDFFF		SMB429406	80063	CLUTCH ASSEMBLY	EA	2
33	6	PAFZZ	5315-00-457-1467	15130	82205	PIN	EA	2
33	7	PAFZZ	3120-00-318-7687	SMB204945	80063	BUSHING	EA	6
33	8	PAFZZ	3020-00-295-8129	SMB204917	80063	GEAR	EA	3
33	9	PAFZZ	3010-00-475-5077	SMB429405	80063	CLUTCH	EA	5
33	10	PAFFF	6660-00-350-3598	SMB204937	80063	ARM ASSEMBLY	EA	6
33	11	XDFFF		SMC204921	80063	PIVOT ASSEMBLY	EA	1
33	12	PAFZZ	3020-00-295-8129	SMB204917	80063	GEAR	EA	1
33	13	PAFZZ	5365-00-922-1855	SMB204920-1	80063	WASHER,FLAT	EA	1
33	14	PAFZZ	3020-00-491-6382	SMB204918	80063	GEAR	EA	1
33	15	PAFZZ	6660-00-238-3827	SMB204919-1	80063	PIVOT	EA	1
33	16	PAFZZ	5315-00-457-1466	15133	82205	PIN	EA	2
33	17	XDFFF		SMB429407	80063	PIVOT ASSEMBLY	EA	1
33	18	PAFZZ	3020-00-491-6382	SMB204918	80063	GEAR	EA	1
33	19	PAFZZ	5365-00-922-1855	SMB204920-1	80063	WASHER,FLAT	EA	2
33	20	PAFZZ	3020-00-295-8128	SMB204938	80063	GEAR	EA	2
33	21	PAFZZ	6660-00-238-3827	SMB204919-1	80063	PIVOT	EA	2
33	22	PAFZZ	5315-00-457-1478	15132	82205	PIN	EA	2
33	23	PAFFF	3020-00-463-3325	SMB204940	80063	GEAR ASSEMBLY	EA	1
33	24	PAFZZ	3040-00-004-8299	SMB204923	80063	SHAFT	EA	1
33	25	PAFFF	6660-00-176-0095	SMB204929	80063	BUSHING ASSEMBLY	EA	1
33	26	PAFZZ	3020-00-491-6382	SMB204918	80063	GEAR	EA	3
33	27	PAFZZ	3120-00-890-4271	SMB204928	80063	BUSHING	EA	1
33	28	PAFZZ	5315-00-457-1475	15131	82205	PIN,BRASS	EA	2
33	29	PAFFF	6660-00-176-0096	SMB204926	80063	BUSHING ASSEMBLY	EA	1
33	30	PAFZZ	5315-00-457-1475	15131	82205	PIN,BRASS	EA	2
33	31	PAFZZ	3120-00-976-7971	SMB204925	80063	BUSHING	EA	1
33	32	PAFZZ	3020-00-552-9295	SMB204924	80063	GEAR	EA	2
33	33	PAFZZ	5360-00-490-4945	SMB204932	80063	SPRING	EA	1
33	34	PAFZZ	3120-00-003-4001	SMB204922	80063	BUSHING	EA	8
33	35	PAFZZ	5365-00-893-5545	MS90707-4012	96906	RING,RETAINER	EA	8
33	36	PAFFF	6660-00-159-8472	SMB429406	80063	CLUTCH ASSEMBLY	EA	3
33	37	PAFZZ	5360-00-490-4961	SMB204941	80063	SPRING	EA	1
33	38	PAFZZ	6660-00-159-8374	SMC204934	80063	CLUTCH ASSEMBLY	EA	1
33	39	PAFZZ	3040-00-764-7899	SMB204942	80063	SHAFT	EA	3
33	40	XDFZZ		SMD204916	80063	HOUSING	EA	1

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
33	41	XDFZZ		SMB204927	80063	STOP	EA	1
33	42	PAFZZ	5315-00-187-3218	MS24692-6	96906	PIN,TAPER	EA	2
33	43	PAFZZ	5305-00-980-3934	MS18064-1	96906	SETSCREW	EA	2
33	44	PAFZZ	3040-00-463-5618	SMB204930	80063	SHAFT	EA	1
33	45	XDFZZ		SMB204931	80063	BAR	EA	1
33	46	PAFZZ	5305-00-068-5414	MS16995-11	96906	SCREW,CAP	EA	2

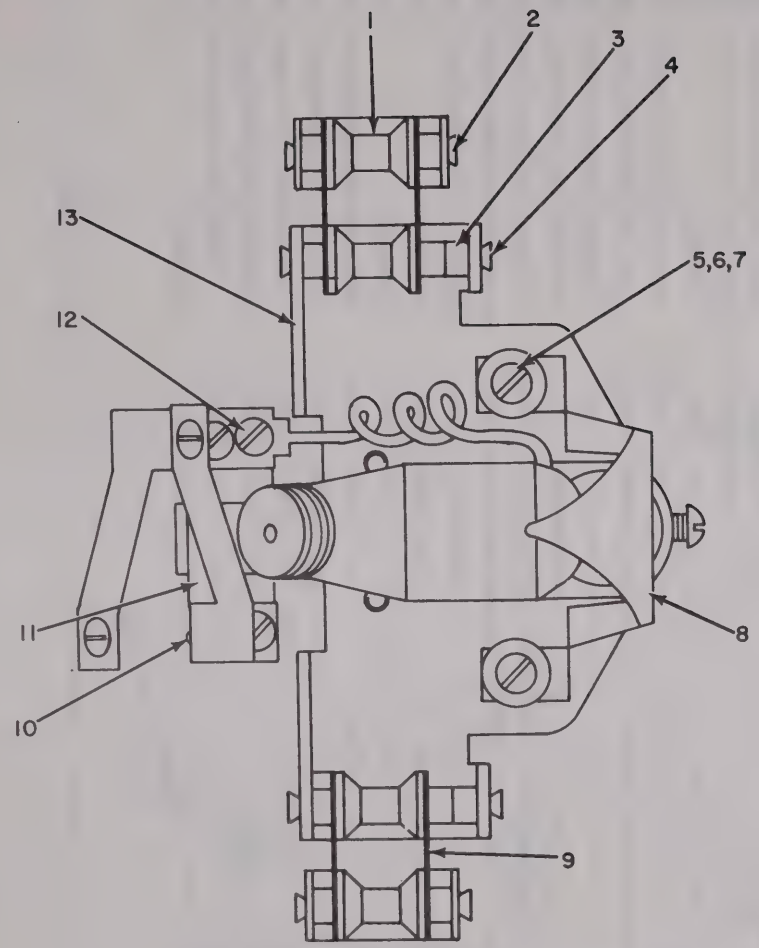

PEN CARRIAGE, TOP VIEW

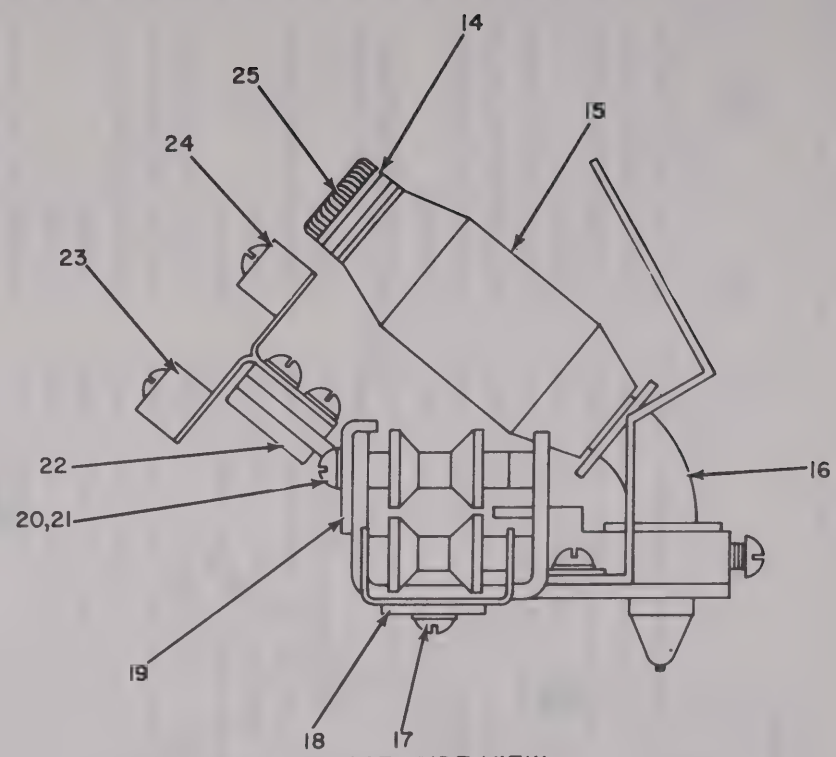

PEN CARRIAGE, SIDE VIEW

EL4PF045

Figure 34. Recorder, Frequency Time RD-88C/TMQ-5, Pen Carriage and Desk Assemblies (Sheet 1 of 2).

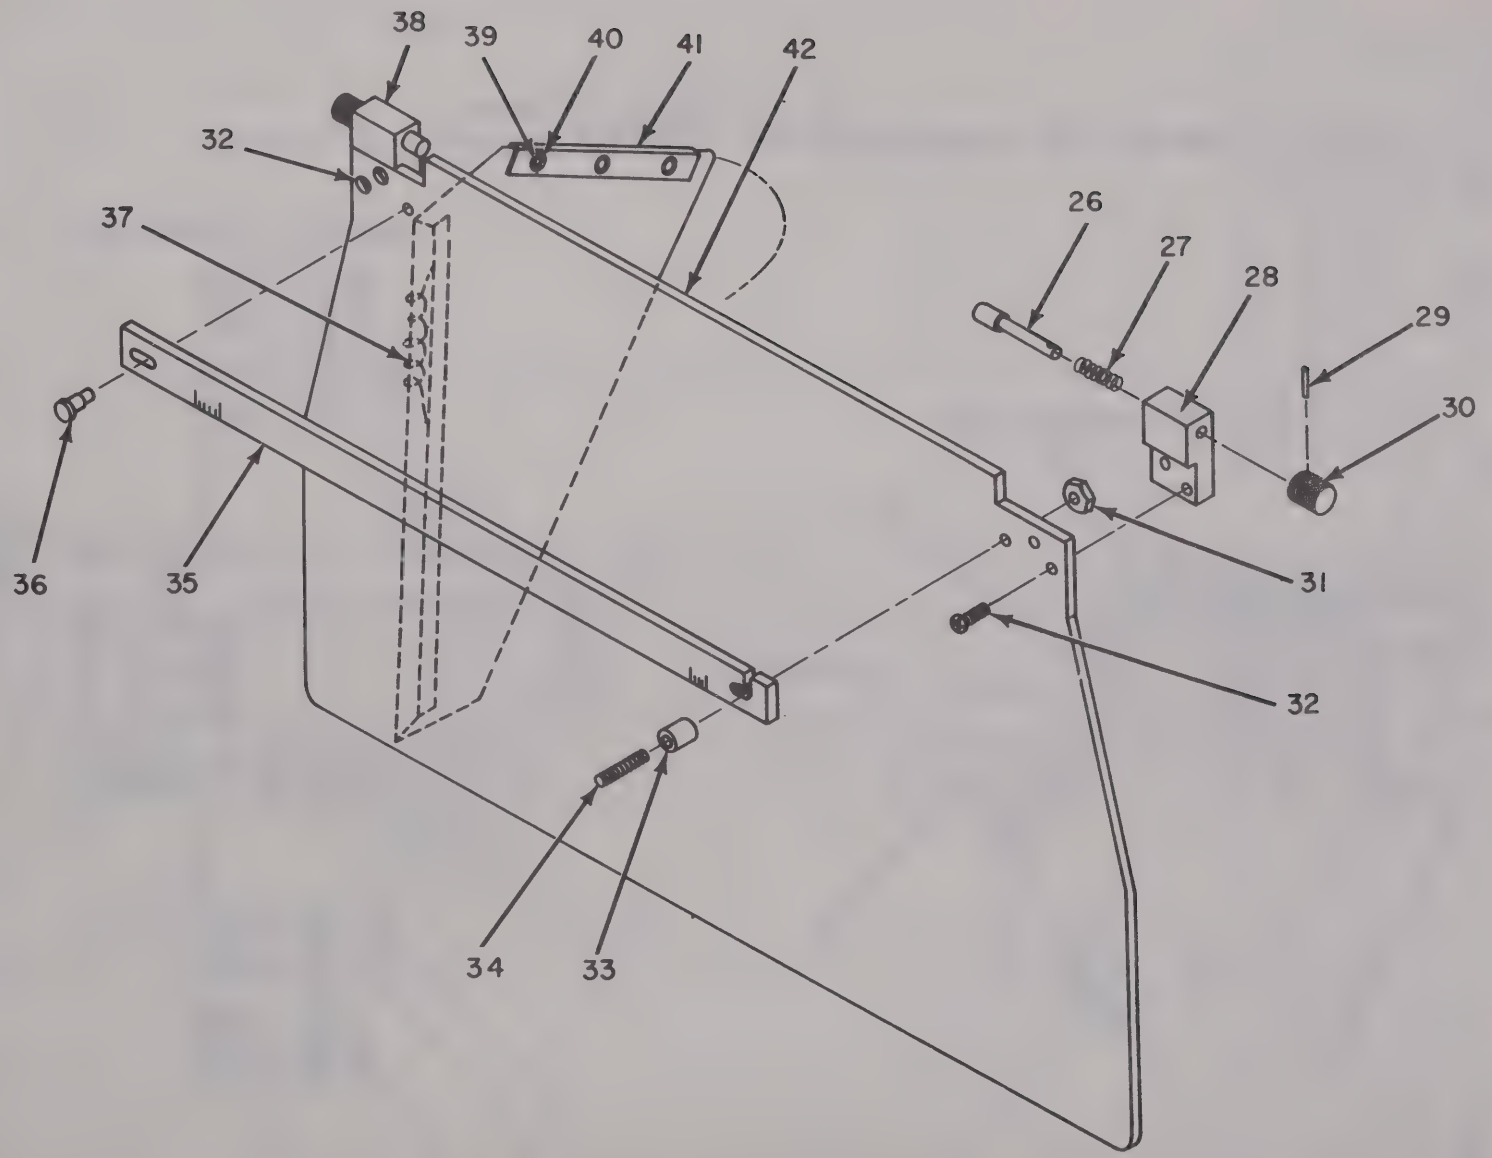

DESK ASSEMBLY

EL4PF050

Figure 34. Recorder, Frequency Time RD-88C-TMQ-5, Pen Carriage and Desk Assemblies (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
34	1	PAFZZ	6660-00-513-0089	SMB133884	80063	ROLLER	EA	9
34	2	PAFZZ	5315-00-527-3029	SMB133887-2	80063	SHAFT	EA	2
34	3	PAFZZ	5365-00-513-0075	SMB133888	80063	SLEEVE,SPACER	EA	2
34	4	XDFZZ		SMB133887-1	80063	SHAFT	EA	2
34	5	PAFZZ	5305-00-762-7482	MS35206-202	96906	SCREW,MACHINE	EA	8
34	6	PAFZZ	5310-00-543-5060	MS35338-39	96906	WASHER,LOCK	EA	19
34	7	PAFZZ	5310-00-045-5201	MS15795-902	96906	WASHER,FLAT	EA	2
34	8	XDOZZ		SCB125789	80063	POINTER	EA	1
34	9	PAFZZ	6660-00-513-0086	SMB133885	80063	LEVER,TENSION	EA	1
34	10	PAFZZ	5999-00-712-8436	S716	37942	CONTACT	EA	1
34	11	XDFZZ		SCB125791	80063	BLOCK	EA	1
34	12	PAFZZ	5305-00-889-3118	MS35206-203	96906	SCREW,MACHINE	EA	2
34	13	XDFZZ		SMB133891	80063	BRACKET ASSEMBLY	EA	1
34	14	XDOZZ		SK5320-595	35529	WASHER,FLAT	EA	1
34	15	PAFZZ	6660-00-373-2838	SCC125798	80063	PEN HEATER ASSEMBLY	EA	1
34	16	PAOZZ	6660-00-663-7917	SMB133955	80063	PEN	EA	1
34	17	PAFZZ	5305-00-990-8386	MS35206-201	96906	SCREW,MACHINE	EA	2
34	18	XDFZZ		SMB133886	80063	PLATE,CLAMP	EA	1
34	19	XDFZZ		SCB125793	80063	CLAMP	EA	2
34	20	PAFZZ	5305-00-993-0191	MS35206-212	96906	SCREW,MACHINE	EA	2
34	21	PAFZZ	5310-00-543-2410	MS35338-40	96906	WASHER,LOCK	EA	2
34	22	XDFZZ		SCB125790	80063	PLATE	EA	2
34	23	PAFZZ	5360-00-759-2748	SCB125792-1	80063	SPRING	EA	1
34	24	PAFZZ	5999-00-373-2836	SCB125792-2	80063	SPRING	EA	1
34	25	XDOZZ		SMB133944	80063	CAP	EA	1
34	26	PAOZZ	5315-00-613-6909	SCB125557	80063	PIN	EA	2
34	27	PAOZZ	5360-00-598-4719	SCB125558	80063	SPRING	EA	2
34	28	PAOZZ	6660-00-392-9706	SCB125552	80063	BLOCK,RIGHT HAND	EA	1
34	29	PAOZZ	5340-00-582-2742	MS35647-2	96906	PIN,GROOVED	EA	2
34	30	PAOZZ	5355-00-667-6073	SCB125559	80063	KNOB	EA	2
34	31	PAOZZ	5310-00-934-9739	MS35649-242	96906	NUT,PLAIN,HEXAGON	EA	11
34	32	PAOZZ	5305-00-958-5453	MS35190-236	96906	SCREW,MACHINE	EA	4
34	33	XDOZZ		SCB125560	80063	NUT,HEXAGON	EA	1
34	34	XDOZZ		SCB125561	80063	STUD	EA	1
34	35	PAOZZ	6660-00-787-6657	SCC125556	80063	SCALE	EA	1
34	36	PAOZZ	5315-00-003-3995	SCB125553	80063	PIVOT	EA	1
34	37	PAFZZ	6660-00-712-8429	SCB125564	80063	SPRING	EA	6
34	38	PAOZZ	6660-00-392-9709	SCB125552-2	80063	BLOCK,LEFT HAND	EA	1
34	39	PAFZZ	5325-00-202-1480	SE39	61957	EYELET	EA	4
34	40	XDFZZ		SCD125505-3	80063	WASHER,FLAT	EA	12

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
34	41	XDFZZ		SCB125563	80063	CHANNEL	EA	2
34	42	PAOZZ	6660-00-176-0082	SCD125555	80063	SHELF	EA	1

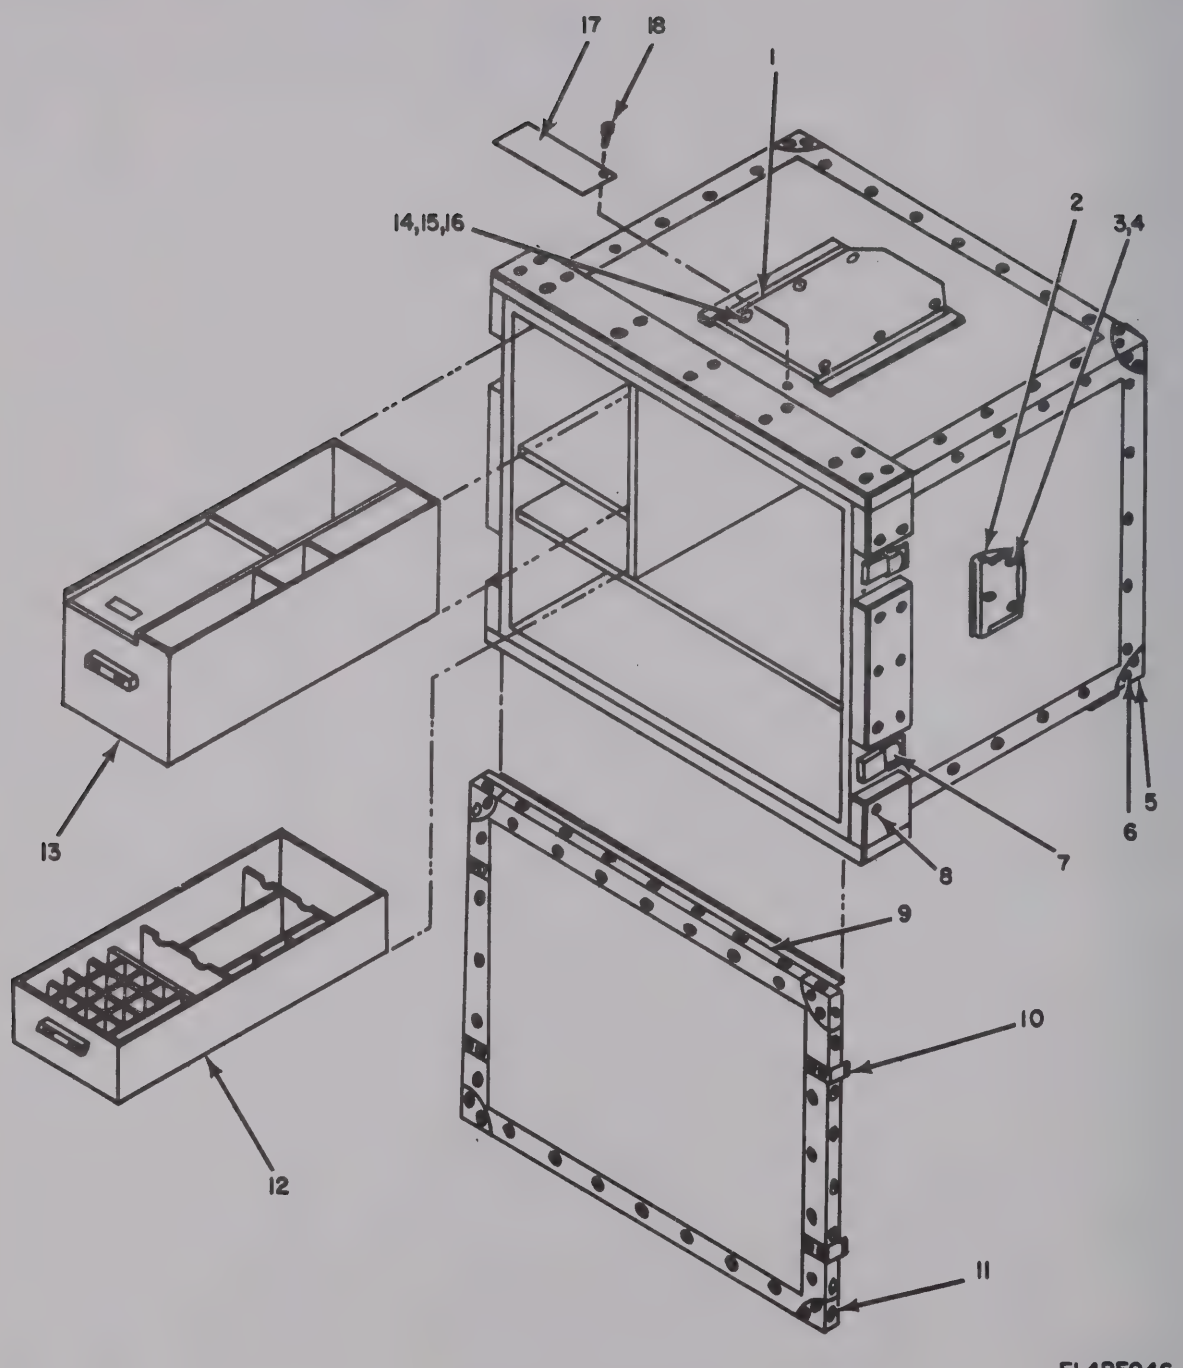

Figure 35. Case, Accessories CY-930/TMQ-5.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 07 CASE, ACCESSORIES CY-990/TNQ-5		
35	1	XDOZZ		SCC125802	80063	PLATE,MOUNTING	EA	1
35	2	XDOZZ		S512168	97068	HANDLE,CHEST	EA	2
35	3	PAOZZ	5305-00-984-7343	MS35191-276	96906	SCREW,MACHINE	EA	6
35	4	PAOZZ	5310-00-208-2793	S358077	61864	TEE NUT	EA	14
35	5	XDOZZ		MS35260-13	96906	BRACE,CORNER	EA	4
35	6	PAOZZ	5305-00-984-7341	MS35191-273	96906	SCREW,MACHINE	EA	36
35	7	PAOZZ	5340-00-200-8630	S1097	77893	CATCH	EA	4
35	8	PAOZZ	5305-00-993-1848	MS35207-265	96906	SCREW,MACHINE	EA	8
35	9	PAOZZ	5330-00-435-2055	MX40281	74951	GASKET	FT	8
35	10	XDOZZ		SMBJ33925	80063	FASTENER	EA	4
35	11	XDOZZ		MS35259-9	96906	BRACE,CORNER	EA	4
35	12	XDOZZ		SCD125806	80063	DRAWER,LOWER	EA	1
35	13	XDOZZ		SCD125807	80063	DRAWER,UPPER	EA	1
35	14	PAOZZ	5310-00-543-2648	S358685	61864	TEE NUT	EA	6
35	15	PAOZZ	5305-00-988-1725	MS35206-281	96906	SCREW,MACHINE	EA	6
35	16	PAOZZ	5310-00-582-5915	MS35338-44	96906	WASHER,LOCK	EA	6
35	17	XDOZZ		SMC133952	80063	PLATE	EA	4
35	18	PAOZZ	5305-00-900-3244	MS35493-502	96906	SCREW,WOOD	EA	1

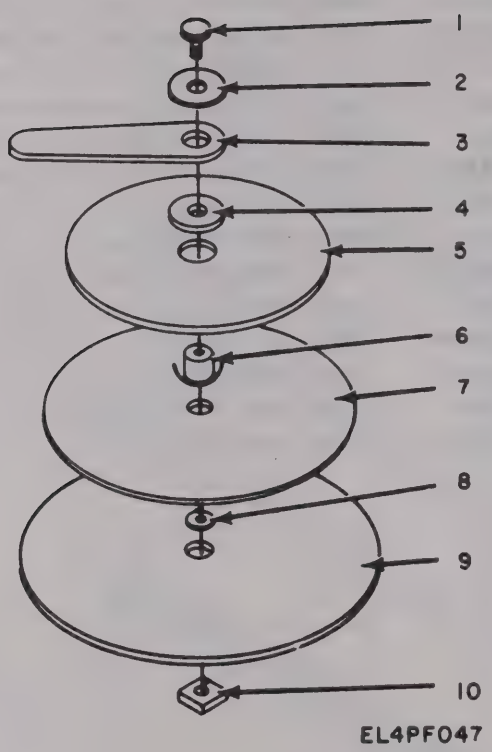

Figure 36. Computer, Humidity-Temperature CP-223C/U.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 08 COMPUTER,HUMIDITY-TEMPERATURE		
						CP-223C/U		
36	1	XDOZZ		SCB21644	80063	NUT,THUMB	EA	1
36	2	XDOZZ		SCB30136-2	80063	WASHER,FLAT	EA	1
36	3	XDOZZ		SCC21642-1	80063	CURSOR	EA	1
36	4	XDOZZ		SCB30136-1	80063	WASHER,FLAT	EA	1
36	5	XDOZZ		SCC598914	80063	HUMIDITY PLATE	EA	1
36	6	XDOZZ		SCB21645	80063	NUT,CLINCH	EA	1
36	7	XDOZZ		SCC92349	80063	FREQUENCY PLATE	EA	1
36	8	XDOZZ		SCB21646-3	80063	WASHER,FLAT	EA	1
36	9	XDOZZ		SC0598913	80063	BASEPLATE	EA	1
36	10	XDOZZ		SCB21643	80063	SPINDLE	EA	1

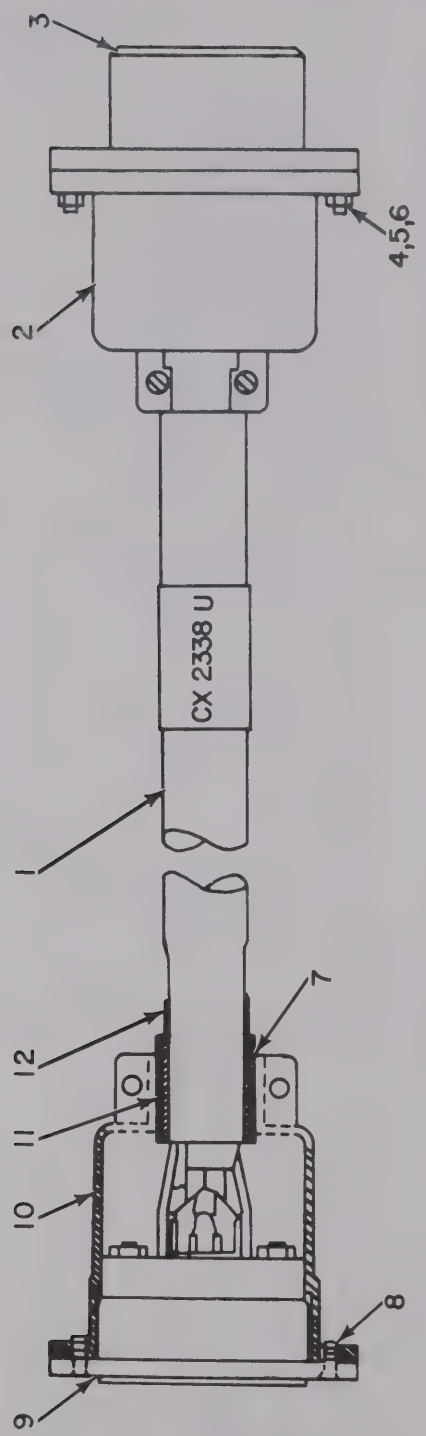

Figure 37. Cable Assembly, Special Purpose, Electrical CX-2338/U.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 09 CABLE ASSEMBLY,SPECIAL PURPOSE, ELECTRICAL CX-2338/U		
37	1	XDHZZ		2-20S1220PVC	70903	CABLE	FT	V
37	2	PAHZZ	5935-00-392-6277	DP83313615	71468	SHELL	EA	1
37	3	PAHZZ	5935-00-173-5906	DP8814-33S	71468	CONNECTOR	EA	1
37	4	PAHZZ	5305-00-958-5453	MS35190-236	96906	SCREW,MACHINE	EA	3
37	5	PAHZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	4
37	6	PAHZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	4
37	7	PAHZZ	5365-00-769-1803	15138	82205	BUSHING	EA	2
37	8	PAHZZ	5305-00-958-5451	MS35190-239	96906	SCREW	EA	4
37	9	PAHZZ	5935-00-283-7104	DP8814-34P1G	71468	CONNECTOR	EA	1
37	10	PAHZZ	5935-00-392-6276	DP834	71468	SHELL	EA	1
37	11	PAHZZ	5365-00-709-3308	15136	82205	BUSHING	EA	2
37	12	PAHZZ	5975-00-437-6719	SCB125125	80063	FERRULE	EA	2

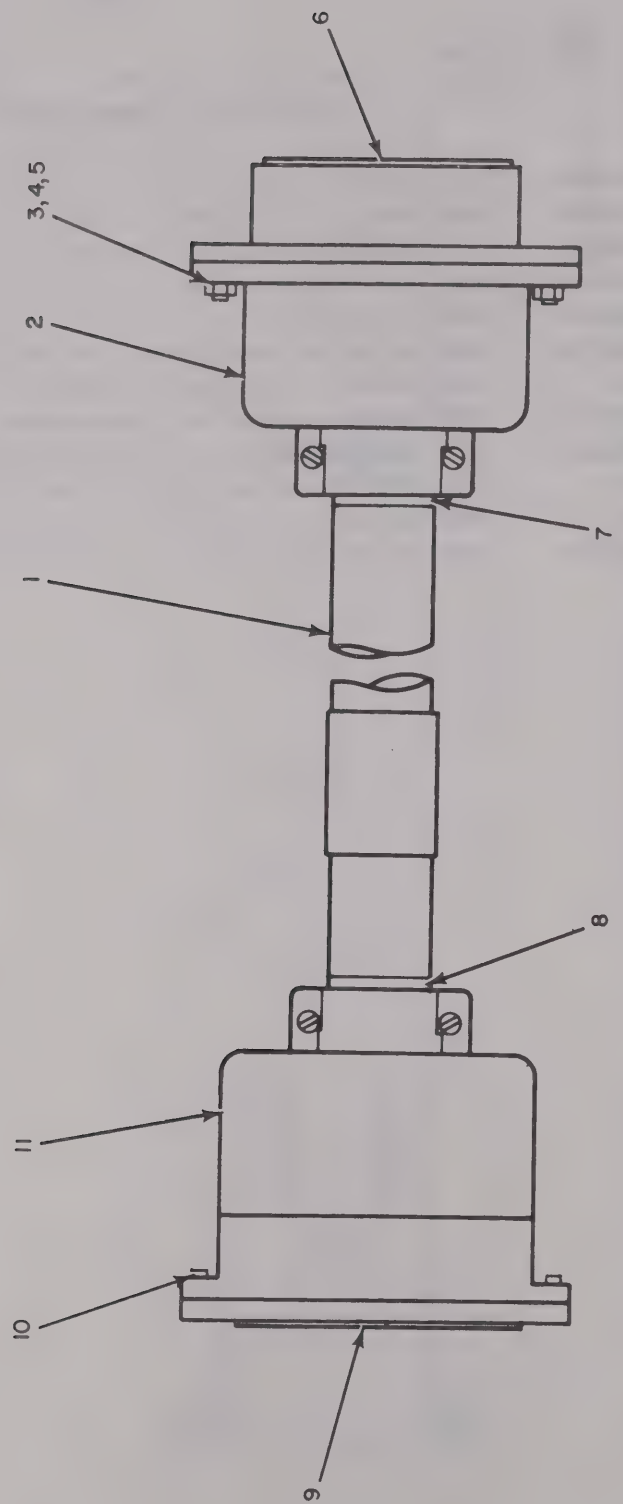

Figure 38. Cable Assembly, Special Purpose, Electrical CX-2339/U.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION / USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 10 CABLE ASSEMBLY,SPECIAL PURPOSE,		
						ELECTRICAL CX-2339/U		
38	1	XDHZZ		CO28MGF28200900	70903	CABLE	FT	8
38	2	PAHZZ	5935-00-518-6983	DPD33-11612	71468	SHELL	EA	1
38	3	PAHZZ	5305-00-958-5451	MS35190-239	96906	SCREW,MACHINE	EA	4
38	4	PAHZZ	5310-00-045-4007	MS35338-41	96906	WASHER,LOCK	EA	4
38	5	PAHZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	4
38	6	PAHZZ	5935-00-259-4102	DPD828-33S1G	71468	CONNECTOR	EA	1
38	7	PAHZZ	5365-00-769-1883	15138	82209	BUSHING,RUBBER	EA	2
38	8	PAHZZ	5365-00-709-3308	15136	82209	SPACER,SLEEVE	EA	2
38	9	PAHZZ	5935-00-201-2476	DPD828-34P	71468	CONNECTOR	EA	1
38	10	PAHZZ	5305-00-958-5453	MS35190-236	96906	SCREW,MACHINE	EA	3
38	11	PAHZZ	5935-00-518-6982	DPD34-12172	71468	SHELL	EA	1

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX.

STOCK NUMBER	FIGURE NO.	ITEM NO.
5315-00-003-3995	34	36
3120-00-003-4001	33	34
5365-00-004-3487	9	94
5365-00-004-3488	9	89
3040-00-004-8299	33	24
5307-00-005-1052	22	21
3120-00-005-8274	21	44
5315-00-007-1608	25	3
5315-00-007-1608	28	2
3120-00-008-5811	24	1
3120-00-009-3983	21	46
5310-00-014-5850	1	22
5365-00-036-8104	7	60
5310-00-045-3296	1	10
5310-00-045-3296	2	32
5310-00-045-3296	21	39
5310-00-045-3299	2	52
5310-00-045-3299	14	7
5310-00-045-3299	15	92
5310-00-045-3299	15	102
5310-00-045-3299	19	40
5310-00-045-3299	21	18
5310-00-045-3299	31	8
5310-00-045-4007	2	49
5310-00-045-4007	7	28
5310-00-045-4007	14	2
5310-00-045-4007	15	60
5310-00-045-4007	15	85
5310-00-045-4007	19	8
5310-00-045-4007	19	56
5310-00-045-4007	19	81
5310-00-045-4007	21	52
5310-00-045-4007	30	5
5310-00-045-4007	37	5
5310-00-045-4007	38	4
5310-00-045-5201	20	19
5310-00-045-5201	27	5
5310-00-045-5201	34	7
5310-00-045-5202	2	81
5310-00-045-5210	2	67
5910-00-052-5504	15	15
5305-00-054-5647	22	41
5305-00-054-5648	33	1
5320-00-055-3209	3	7
5310-00-056-8519	9	53
5940-00-057-2805	2	56
6240-00-057-2887	19	2
5305-00-059-4550	30	3
5305-00-059-4552	19	30
5305-00-059-4552	19	74
5305-00-059-4553	2	47
5305-00-059-4553	7	13
5305-00-059-4553	9	52
5305-00-059-4553	14	35
5305-00-059-4553	19	67
5305-00-059-4553	20	11
5305-00-059-4568	14	14
5905-00-059-8104	8	19
5305-00-059-8249	19	64
5305-00-059-8251	14	15
5305-00-059-8255	19	59
5905-00-059-9871	8	17
5310-00-061-7326	22	15
5305-00-068-5276	31	2
5305-00-068-5414	33	46
5310-00-082-1404	7	64
5310-00-082-1404	15	61
5310-00-082-1404	15	76
5310-00-082-1404	19	68
5960-00-082-4115	15	30
5960-00-082-4139	9	8
5905-00-092-8732	21	3
5905-00-104-8330	13	4
5905-00-104-8346	11	9
5905-00-104-8350	11	21
5930-00-108-6980	9	77
5310-00-111-3657	23	3
5940-00-113-3137	14	19
5905-00-114-5393	11	20
5905-00-114-5393	12	9
5905-00-114-5393	18	7
5905-00-114-5428	11	6
5935-00-129-9358	9	69
5935-00-129-9358	15	42
5905-00-141-1073	11	8
5905-00-141-1073	12	5
5935-00-149-3083	14	16
3110-00-151-9206	19	28
5310-00-159-6321	23	11
6660-00-159-8374	33	38
6660-00-159-8472	33	36
5120-00-159-8489	2	21
5910-00-160-4918	9	25
5910-00-160-4919	15	109
5355-00-160-7105	7	15
6660-00-162-4460	32	6
6660-00-162-4461	32	7
6660-00-162-4463	32	8
6660-00-163-4919	31	3
6660-00-163-4929	21	30
5960-00-166-7674	15	6
5905-00-171-1976	18	2
5905-00-171-1985	9	78
5905-00-171-2005	18	11
5905-00-171-2009	9	75
5905-00-171-2009	16	2
5905-00-171-2009	17	6
6660-00-172-5768	7	66
5935-00-173-5906	2	4
5935-00-173-5906	9	51
5935-00-173-5906	37	3
5325-00-174-5317	8	12
6660-00-176-0080	32	10
6660-00-176-0081	32	14
6660-00-176-0082	34	42
6660-00-176-0088	9	79
6660-00-176-0094	20	1
6660-00-176-0095	33	25
6660-00-176-0096	33	29
6660-00-176-0098	9	70
5999-00-177-1694	17	9
5940-00-177-6738	17	12
6240-00-179-1811	11	5
6240-00-179-1811	12	3
6240-00-179-1811	17	8
5960-00-179-3710	15	12
5310-00-184-8970	2	68
5905-00-185-6575	12	7
5905-00-185-6946	11	15
5905-00-185-6946	16	5
5905-00-185-6946	17	2
5905-00-185-6946	18	1
5905-00-185-8518	11	14
5905-00-185-8518	12	4
5905-00-185-8518	18	23
5315-00-187-3218	33	42
5905-00-192-0450	11	19
5905-00-192-0662	11	22
5905-00-192-0662	16	4
5905-00-192-3987	10	1
5905-00-192-3987	11	13
5905-00-192-4408	18	12
5905-00-192-9260	17	3
5310-00-193-7577	7	27
5310-00-193-7577	9	62
5310-00-193-7577	15	10
5310-00-193-7577	32	21
5905-00-195-6741	10	4
5905-00-195-6817	11	18
5340-00-197-8812	2	10
5340-00-197-8812	7	29
5340-00-197-8812	9	18
5340-00-197-8812	15	34
5310-00-198-3738	19	18
5340-00-200-5463	2	8
5340-00-200-5463	8	11
5340-00-200-5463	15	37
5340-00-200-5463	19	78

STOCK NUMBER	FIGURE NO.	ITEM NO.
5340-00-200-8630	35	7
5935-00-201-2478	15	4
5935-00-201-2478	38	9
5325-00-202-1480	34	39
4730-00-203-6585	21	27
3020-00-204-2420	30	10
5945-00-204-5776	15	29
5340-00-205-5159	4	4
5305-00-206-3716	15	97
5305-00-206-5275	22	52
5305-00-206-5281	2	34
5305-00-206-5555	22	33
5310-00-208-2793	35	4
5310-00-209-0123	19	53
5310-00-209-0786	15	106
5310-00-209-0788	15	98
5340-00-209-7531	20	2
5340-00-209-7541	7	12
6240-00-223-9100	7	19
6660-00-238-3827	33	15
6660-00-238-3827	33	21
6660-00-238-4366	9	71
6660-00-238-4367	9	55
5935-00-240-0173	19	5
5905-00-249-3663	17	5
5905-00-249-4243	16	3
5905-00-249-4248	18	17
5930-00-249-6518	22	25
5305-00-253-5607	2	76
5305-00-253-5607	14	24
5305-00-253-5607	19	13
5305-00-253-5607	32	12
5935-00-257-7041	9	47
5935-00-257-7041	15	54
5935-00-257-7042	9	38
5940-00-258-2109	9	64
5940-00-258-2109	21	47
5940-00-258-2359	7	63
5940-00-258-2359	14	9
5940-00-258-2359	15	104
5935-00-259-4102	2	22
5935-00-259-4102	38	6
5935-00-260-0516	15	43
5960-00-262-0167	9	1
5960-00-262-0210	9	6
5960-00-262-0286	15	13
5960-00-262-1703	15	2
5910-00-262-8532	9	11
5910-00-262-8533	9	24
5960-00-264-3004	9	5
5910-00-264-8352	9	35
5960-00-264-9519	9	23
5310-00-271-4642	33	3
5905-00-279-1884	11	7
5905-00-279-2531	16	6
5905-00-279-2531	17	1
5905-00-279-2672	12	8
5935-00-280-2284	15	50
5910-00-280-8195	9	15
5960-00-280-8629	15	35
5120-00-281-3887	2	20
5935-00-283-7104	7	31
5935-00-283-7104	9	16
5935-00-283-7104	19	66
5935-00-283-7104	37	9
5910-00-284-4043	9	93
5355-00-284-5196	19	21
3040-00-285-4333	32	15
5310-00-285-6582	30	12
5360-00-288-2005	32	13
3040-00-288-3010	22	13
3020-00-288-3309	30	11
3020-00-288-3405	25	4
3020-00-288-3405	28	3
5330-00-291-1724	20	7
5305-00-292-2383	21	60
5340-00-292-3703	22	9
5950-00-295-7642	15	14
3020-00-295-8128	33	20
3020-00-295-8129	33	8
3020-00-295-8129	33	12
5960-00-295-8500	15	8
5310-00-297-3879	20	10
5330-00-297-5286	2	38
5310-00-298-6545	2	59
5905-00-299-2001	13	7
5905-00-299-2020	11	11
5360-00-306-2112	21	23
5970-00-307-9261	8	5
3120-00-318-7687	33	7
6660-00-322-4639	20	16
5355-00-323-6094	19	50
6660-00-327-6481	23	1
6130-00-330-9728	9	19
5360-00-333-2966	21	68
6660-00-338-0824	22	46
6660-00-342-7253	21	32
6660-00-342-7256	26	5
6660-00-350-3598	33	10
6660-00-370-3721	30	1
2090-00-370-3725	19	43
6660-00-370-3727	22	18
6660-00-370-3728	22	11
6660-00-370-3729	19	46
5945-00-373-2833	15	28
6130-00-373-2834	15	17
5999-00-373-2836	34	24
6660-00-373-2838	34	15
6660-00-373-2839	29	5
6660-00-373-2843	1	17
4140-00-376-2213	14	17
5360-00-376-9560	2	44
5360-00-376-9565	22	4
5950-00-376-9663	15	1
5965-00-377-0087	7	11
6660-00-377-0176	21	67
5310-00-378-5142	22	14
6660-00-378-5155	19	24
6660-00-378-5252	21	24
5330-00-378-5329	7	53
5960-00-387-6270	15	31
5365-00-392-5622	25	5
5365-00-392-5622	28	4
6660-00-392-6150	29	8
6660-00-392-6224	7	61
5935-00-392-6276	37	10
5935-00-392-6277	37	2
5315-00-392-8246	19	34
6660-00-392-9132	30	7
6660-00-392-9616	2	37
6660-00-392-9706	34	28
6660-00-392-9709	19	29
6660-00-392-9709	34	38
6660-00-392-9712	19	41
6625-00-392-9716	22	22
6660-00-392-9717	21	9
5310-00-407-9566	22	45
5905-00-409-7616	10	2
5905-00-409-7616	11	16
5905-00-409-7616	12	6
5905-00-409-7616	13	3
5935-00-421-5864	15	48
5340-00-434-1553	15	21
5330-00-435-2055	35	9
5975-00-437-6719	2	3
5975-00-437-6719	7	57
5975-00-437-6719	9	49
5975-00-437-6719	37	12
5995-00-456-1286	9	48
5995-00-456-1297	7	56
5940-00-456-1418	11	25
5940-00-456-1485	18	15
5940-00-456-1591	16	8
5940-00-456-1650	13	1
5995-00-456-1743	2	2
5995-00-456-1744	7	58
5940-00-456-1748	10	3
5940-00-456-1749	12	11

STOCK NUMBER	FIGURE NO.	ITEM NO.
5315-00-457-1466	33	16
5315-00-457-1467	33	6
5315-00-457-1469	23	14
5315-00-457-1475	33	28
5315-00-457-1475	33	30
5315-00-457-1478	33	22
5310-00-457-1519	22	16
5310-00-457-1541	9	41
5310-00-457-1587	22	34
5310-00-457-1600	22	5
3020-00-463-3325	33	23
3040-00-463-5561	24	7
3040-00-463-5618	33	44
3040-00-463-9520	21	11
5970-00-464-0443	9	56
5340-00-465-8331	26	7
6660-00-470-3020	19	75
5355-00-472-9090	7	51
5960-00-475-4950	9	28
3010-00-475-5077	33	9
3120-00-475-9544	24	3
5340-00-480-4267	15	96
5950-00-482-3060	9	36
5340-00-486-7889	19	72
5307-00-487-9552	15	74
5360-00-490-4945	33	33
5360-00-490-4961	33	37
3020-00-491-6382	33	14
3020-00-491-6382	33	18
3020-00-491-6382	33	26
5330-00-492-2244	2	11
5315-00-498-6490	24	2
5315-00-498-6727	15	93
5315-00-498-6727	15	100
6660-00-503-0669	1	1
6660-00-503-0671	1	6
6660-00-503-0672	1	5
6660-00-508-7633	29	3
5970-00-508-9956	26	4
5970-00-508-9956	26	8
3020-00-510-1866	21	19
6660-00-513-0029	21	37
5365-00-513-0075	34	3
6660-00-513-0086	34	9
6660-00-513-0089	34	1
5340-00-514-0112	2	27
5340-00-514-0112	9	74
5340-00-514-0112	15	89
3020-00-517-0504	21	21
5950-00-518-1174	9	37
5905-00-518-5609	7	32
5935-00-518-6982	38	11
5935-00-518-6983	38	2
5355-00-519-7643	19	14
5945-00-523-5723	22	1
5315-00-527-3029	34	2
3110-00-528-5777	19	19
6660-00-537-7902	1	4
5935-00-539-2651	19	6
3040-00-541-4776	21	13
5910-00-543-0772	9	4
5305-00-543-2024	19	31
5310-00-543-2410	2	62
5310-00-543-2410	7	9
5310-00-543-2410	19	32
5310-00-543-2410	21	56
5310-00-543-2410	26	3
5310-00-543-2410	34	21
5310-00-543-2648	35	14
5310-00-543-5060	9	42
5310-00-543-5060	21	36
5310-00-543-5060	21	73
5310-00-543-5060	22	8
5310-00-543-5060	27	2
5310-00-543-5060	34	6
5910-00-543-9081	16	1
6150-00-548-1713	27	7
5930-00-549-0280	7	30
5935-00-549-9278	9	45
5935-00-549-9278	15	49
5325-00-550-0619	17	11
5905-00-552-2093	7	37
5905-00-552-2093	9	81
5905-00-552-3481	9	52
3020-00-552-9295	33	32
6660-00-553-1946	1	2
3110-00-554-6678	22	47
3110-00-555-5449	24	4
5935-00-557-2938	9	43
5935-00-557-2938	15	52
3040-00-558-2301	19	25
5310-00-559-0070	2	14
5310-00-559-0070	7	23
5310-00-559-0070	9	22
5310-00-559-0070	14	10
5310-00-559-0070	15	57
5310-00-576-5752	9	14
5310-00-576-5752	15	108
5910-00-578-1368	9	30
5910-00-578-1368	15	24
5310-00-579-0079	9	90
5310-00-579-0079	15	19
5330-00-580-2278	7	48
5340-00-582-2742	34	29
5310-00-582-5965	2	63
5310-00-582-5965	15	67
5310-00-582-5965	35	16
5310-00-582-9461	21	72
5940-00-583-1066	27	3
5935-00-590-2182	15	99
5310-00-595-6211	33	4
5310-00-595-7237	19	45
5310-00-596-7691	15	73
5310-00-596-7691	15	86
5310-00-596-7691	18	3
5360-00-597-9039	21	34
5360-00-597-9098	22	17
5360-00-598-4719	34	27
5330-00-611-7522	2	45
5310-00-611-7526	23	13
5305-00-611-7527	27	1
5340-00-611-7530	14	28
5305-00-611-7534	20	17
5340-00-611-7538	19	54
5340-00-611-7544	22	10
5315-00-613-6909	34	26
5340-00-613-6910	19	27
6660-00-614-9859	1	8
5910-00-615-0340	9	2
5930-00-615-7883	7	42
5930-00-615-9376	7	33
5340-00-616-5067	7	44
5960-00-617-6097	15	38
5340-00-622-7484	19	36
5310-00-627-6128	9	60
6105-00-635-3071	21	16
5935-00-636-5983	2	58
5905-00-636-6710	15	84
5905-00-642-2444	15	79
3010-00-643-4662	31	9
5950-00-646-0459	15	25
5950-00-646-3108	9	26
5930-00-655-1517	7	34
5930-00-655-1523	21	66
5930-00-655-1575	14	32
6660-00-663-7914	22	32
6660-00-663-7917	34	16
5905-00-665-5364	8	16
5910-00-666-0087	15	16
5355-00-667-6073	34	30
6625-00-668-9516	7	25
5960-00-669-6861	15	11
5965-00-678-6925	7	41
5325-00-682-2168	9	7
5305-00-682-5932	21	79
6660-00-682-6510	1	20
5935-00-685-9396	9	46
5935-00-685-9396	15	51
5905-00-686-7667	7	50
5905-00-702-1789	7	35

STOCK NUMBER	FIGURE NO.	ITEM NO.
5365-00-709-3308	37	11
5365-00-709-3308	38	8
5360-00-712-8426	23	4
6660-00-712-8427	19	26
5365-00-712-8428	24	6
6660-00-712-8429	34	37
6660-00-712-8430	23	12
6660-00-712-8431	21	77
6660-00-712-8432	22	23
6660-00-712-8433	22	31
5999-00-712-8436	34	10
5305-00-719-5329	22	12
5305-00-719-5336	21	15
5305-00-724-6792	21	12
5305-00-724-6794	19	15
5305-00-724-6794	21	22
5305-00-724-6798	19	22
5305-00-724-6798	21	31
5910-00-725-1994	12	2
6660-00-725-7917	1	21
5310-00-735-0797	19	17
5910-00-752-4843	15	22
5310-00-753-4036	19	58
5310-00-753-4038	23	18
5310-00-753-4447	30	2
5360-00-759-2748	34	23
5305-00-762-7482	21	35
5305-00-762-7482	22	7
5305-00-762-7482	34	5
5340-00-763-0268	19	70
5310-00-763-0280	8	14
5310-00-763-0280	9	88
5310-00-763-0400	23	15
3040-00-764-7899	33	39
5310-00-765-2039	21	80
5310-00-765-2040	19	57
5340-00-765-2115	21	43
5340-00-765-2115	29	2
5340-00-765-2118	21	45
5310-00-765-2194	2	69
5310-00-765-2195	23	16
6660-00-765-5419	9	50
6250-00-766-8454	19	1
5360-00-769-1212	32	19
5315-00-769-1398	32	18
5315-00-769-1402	32	2
5365-00-769-1803	37	7
5365-00-769-1803	38	7
6660-00-771-2211	23	20
6660-00-771-9966	19	33
6660-00-787-6657	34	35
6660-00-788-2133	1	11
5935-00-791-8711	15	94
5365-00-801-2500	24	5
5365-00-803-7301	24	8
6625-00-809-7334	7	1
5310-00-809-8544	1	15
5310-00-809-8544	2	51
5310-00-809-8544	14	29
5310-00-809-8544	19	39
5310-00-809-8544	21	7
5310-00-809-8544	31	7
5310-00-809-8546	2	19
5935-00-812-4936	9	44
5935-00-812-4936	15	44
5310-00-820-3015	7	49
5365-00-822-4498	21	64
5910-00-823-1145	13	2
5360-00-823-5260	22	51
5310-00-826-5217	2	64
5310-00-826-5217	15	68
5960-00-827-8782	9	31
5930-00-833-5123	26	6
5310-00-834-0424	19	52
5910-00-840-6672	12	1
5320-00-842-2748	20	9
5315-00-846-0405	22	6
5310-00-853-6477	29	4
3020-00-853-6789	31	5
5320-00-855-0842	3	1
5320-00-855-0842	4	5
5305-00-855-3249	9	66
5905-00-857-5527	9	87
5905-00-857-5542	8	2
5340-00-860-1088	3	3
5940-00-867-7806	26	9
5305-00-869-4104	20	15
5905-00-883-8356	18	20
5305-00-889-2997	15	9
5305-00-889-2997	21	55
5305-00-889-2998	2	60
5305-00-889-2998	22	27
5305-00-889-3000	2	24
5305-00-889-3000	9	72
5305-00-889-3000	15	18
5305-00-889-3000	20	21
5305-00-889-3000	21	83
5305-00-889-3001	21	48
5305-00-889-3001	21	51
5305-00-889-3002	7	46
5305-00-889-3002	19	38
5305-00-889-3116	32	20
5305-00-889-3118	20	18
5305-00-889-3118	21	71
5305-00-889-3118	34	12
3120-00-890-4271	33	27
6660-00-898-7474	21	28
5305-00-900-3244	35	18
5310-00-905-8451	9	63
5910-00-913-7445	9	12
5365-00-922-1692	7	43
5365-00-922-1855	33	13
5365-00-922-1855	33	19
5305-00-931-3143	31	4
5310-00-933-8118	22	42
5310-00-933-8118	33	2
5310-00-934-9738	21	75
5310-00-934-9738	27	6
5310-00-934-9739	2	61
5310-00-934-9739	7	10
5310-00-934-9739	9	29
5310-00-934-9739	15	32
5310-00-934-9739	21	57
5310-00-934-9739	34	31
5310-00-934-9747	2	48
5310-00-934-9747	7	14
5310-00-934-9747	8	10
5310-00-934-9747	9	91
5310-00-934-9747	14	3
5310-00-934-9747	15	20
5310-00-934-9747	15	87
5310-00-934-9747	19	9
5310-00-934-9747	19	69
5310-00-934-9747	20	12
5310-00-934-9747	21	61
5310-00-934-9747	30	6
5310-00-934-9747	37	6
5310-00-934-9747	38	5
5310-00-934-9751	2	31
5310-00-934-9751	15	88
5310-00-934-9751	18	5
5310-00-934-9751	22	24
5310-00-934-9757	2	53
5310-00-934-9757	7	40
5310-00-934-9757	9	21
5310-00-934-9757	14	8
5310-00-934-9757	15	56
5310-00-934-9757	19	48
5310-00-934-9757	21	17
5310-00-934-9757	31	6
5315-00-935-3711	25	7
5305-00-954-2728	14	22
5305-00-957-2635	2	77
5305-00-957-6265	30	13
5305-00-957-6644	29	7
5305-00-958-0586	15	81
5305-00-958-5450	14	33
5305-00-958-5451	37	8
5305-00-958-5451	38	3
5305-00-958-5453	2	29

STOCK NUMBER	FIGURE NO.	ITEM NO.
5305-00-958-5453	14	25
5305-00-958-5453	34	32
5305-00-958-5453	37	4
5305-00-958-5453	38	10
5305-00-958-5457	7	8
5305-00-958-5477	7	52
5305-00-959-0379	22	37
3120-00-976-7971	33	31
5305-00-978-9342	32	3
5305-00-978-9343	32	5
5305-00-980-3934	33	43
5940-00-983-6082	14	1
5305-00-983-6730	15	70
5305-00-983-6730	22	28
5310-00-983-8483	15	58
5310-00-983-8483	20	20
5310-00-983-8483	21	20
5310-00-983-8483	26	2
5305-00-984-4977	7	26
5305-00-984-4977	26	1
5305-00-984-4982	20	4
5305-00-984-4983	22	36
5305-00-984-4984	7	6
5305-00-984-4984	9	68
5305-00-984-4984	15	33
5305-00-984-4984	19	73
5305-00-984-4988	2	9
5305-00-984-4988	8	8
5305-00-984-4988	9	61
5305-00-984-4988	15	36
5305-00-984-4988	15	75
5305-00-984-4988	19	7
5305-00-984-4988	19	80
5305-00-984-4988	21	53
5305-00-984-4989	9	40
5305-00-984-4989	15	59
5305-00-984-4989	19	55
5305-00-984-4989	30	4
5305-00-984-4993	7	54
5305-00-984-6191	15	101
5305-00-984-6191	21	6
5305-00-984-6193	7	22
5305-00-984-6193	14	11
5305-00-984-6193	22	2
5305-00-984-6194	2	50
5305-00-984-6194	7	39
5305-00-984-6194	15	103
5305-00-984-6194	21	29
5305-00-984-6195	2	13
5305-00-984-6196	9	20
5305-00-984-6197	2	15
5305-00-984-6197	21	25
5305-00-984-6222	8	13
5305-00-984-7341	2	18
5305-00-984-7341	19	51
5305-00-984-7341	35	6
5305-00-984-7343	2	80
5305-00-984-7343	35	3
5930-00-987-8593	7	3
5305-00-988-1167	21	76
5305-00-988-1725	35	15
5305-00-989-7434	1	9
5305-00-989-7434	21	38
5305-00-989-7435	2	33
5305-00-990-8386	34	17
5305-00-993-0190	9	58
5305-00-993-0190	22	50
5305-00-993-0191	34	20
5305-00-993-1848	35	8
5305-00-995-6311	18	4

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AM12-4	74193	7	3
AN3057-4	81352	19	5
AN3102A20-7P	81349	2	57
AN3106A10SL4S	81349	19	6
AN931-3-5	81349	8	12
AR2KL5	73138	7	59
A1037-0121	78553	20	10
CD09181	00656	9	27
CM20C221K	81349	12	2
CO28MGF28200900	70903	38	1
CP-223C/U	80058	1	7
CP05AIKF223K3	81349	13	2
CP06SA2	81349	15	109
CP06SA4	81349	9	3
CP07SA4	81349	9	25
CP07SB4	81349	15	16
CP07SB6	00656	9	12
CP091B2	00656	9	34
CP091B3	00656	9	9
CP091B6	00656	9	32
CP091SA6	00656	15	21
CP25AIEF103K	81349	12	1
CP26AIEF503K	81349	16	1
CP53BIEF105V1	81349	22	35
CP53BIEF105V1	81349	14	6
CP61BIEF105K	81349	9	30
CP61BIEF105K	81349	15	24
CP61BIEF503K	81349	9	2
CP61BIEF504K	81349	9	4
CP70EIEF405K	81349	15	15
CP70EIEG405K	81349	15	22
CV146ATMQ5	80058	1	1
CX-2338/U	80058	1	6
CX-2339/U	80058	1	5
CY1390ATMQ5	80058	1	3
CY930TMQ5	80058	1	4
C834ATMQ5	80058	1	23
DFGS4501R92AS	82877	14	18
DPBB14-33S	71468	2	4
DPBB14-33S	71468	9	51
DPBB14-33S	71468	37	3
DPBB14-34P1G	71468	7	31
DPBB14-34P1G	71468	9	16
DPBB14-34P1G	71468	19	66
DPBB14-34P1G	71468	37	9
DPBB8-33S	71468	2	22
DPB3313615	71468	37	2
DPB34	71468	37	10
DPDB28-33S1G	71468	38	6
DPDB28-34P	71468	15	4
DPDB28-34P	71468	38	9
DPD33-11612	71468	38	2
DPD34-12172	71468	38	11
FO2B250V1-8AS	81349	15	47
FO2GR3008	75915	15	46
GP3-109X562-14	73957	23	14
GP4-093X375-12	73957	19	23
JV5	80063	26	8
LM27	06247	19	2
ML432ATMQ5	80058	1	20
MR26W150ACVVR	81349	7	25
MSX7141	71785	21	81
MS15795-202	96906	21	72
MS15795-803	96906	33	4
MS15795-902	96906	20	19
MS15795-902	96906	27	5
MS15795-902	96906	34	7
MS15795-903	96906	2	81
MS15795-910	96906	2	67
MS16536-33	96906	3	1
MS16536-33	96906	4	5
MS16556-607	96906	25	7
MS16624-1050	96906	24	8

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
MS16624-2025	96906	2	46
MS16624-2025	96906	19	47
MS16624-2087	96906	2	43
MS16625-1112	96906	24	5
MS16633-2025	96906	23	5
MS16995-10	96906	22	37
MS16995-11	96906	33	46
MS16995-9	96906	31	2
MS16997-10	96906	32	5
MS16997-9	96906	32	3
MS17122-15	96906	17	12
MS18063-1	96906	32	4
MS18063-2	96906	31	4
MS18064-1	96906	33	43
MS19060-19	96906	19	28
MS20364-632	96906	9	63
MS20426D4-6	96906	5	3
MS20470D4-8	96906	4	3
MS20659-1	96906	14	19
MS21045-3	96906	22	15
MS21318-8	96906	2	76
MS21318-8	96906	14	24
MS21318-8	96906	19	13
MS21318-8	96906	32	12
MS24692-6	96906	33	42
MS25082-20	96906	23	11
MS25253-2	96906	26	6
MS27183-42	96906	1	22
MS27183-5	96906	15	58
MS27183-5	96906	20	20
MS27183-5	96906	21	20
MS27183-5	96906	26	2
MS27183-6	96906	7	64
MS27183-6	96906	15	61
MS27183-6	96906	15	76
MS27183-6	96906	19	68
MS27183-7	96906	1	15
MS27183-7	96906	2	51
MS27183-7	96906	14	29
MS27183-7	96906	19	39
MS27183-7	96906	21	7
MS27183-7	96906	31	7
MS27183-8	96906	2	19
MS35058-26	96906	7	34
MS35058-31	96906	21	66
MS35059-21	96906	7	33
MS35059-22	96906	14	32
MS35190-220	96906	29	7
MS35190-226	96906	7	8
MS35190-234	96906	30	13
MS35190-235	96906	30	3
MS35190-236	96906	2	29
MS35190-236	96906	14	25
MS35190-236	96906	34	32
MS35190-236	96906	37	4
MS35190-236	96906	38	10
MS35190-237	96906	19	30
MS35190-237	96906	19	74
MS35190-238	96906	2	47
MS35190-238	96906	7	13
MS35190-238	96906	9	52
MS35190-238	96906	14	35
MS35190-238	96906	19	67
MS35190-238	96906	20	11
MS35190-239	96906	37	8
MS35190-239	96906	38	3
MS35190-240	96906	14	33
MS35190-253	96906	14	14
MS35190-254	96906	7	52
MS35190-255	96906	14	22
MS35191-273	96906	2	18
MS35191-273	96906	19	51
MS35191-273	96906	35	6
MS35191-276	96906	2	80
MS35191-276	96906	35	3
MS35191-277	96906	2	77
MS35206-201	96906	34	17
MS35206-202	96906	21	35
MS35206-202	96906	22	7
MS35206-202	96906	34	5
MS35206-203	96906	20	18
MS35206-203	96906	21	71
MS35206-203	96906	34	12
MS35206-204	96906	21	76
MS35206-208	96906	27	4
MS35206-212	96906	34	20
MS35206-213	96906	32	20
MS35206-214	96906	9	58
MS35206-214	96906	22	50
MS35206-215	96906	15	9
MS35206-215	96906	21	55
MS35206-216	96906	2	60
MS35206-216	96906	22	27
MS35206-218	96906	15	70
MS35206-218	96906	22	28
MS35206-220	96906	7	26
MS35206-220	96906	26	1
MS35206-225	96906	20	4
MS35206-226	96906	22	36
MS35206-227	96906	7	6
MS35206-227	96906	9	68
MS35206-227	96906	15	33
MS35206-227	96906	19	73
MS35206-228	96906	2	9
MS35206-228	96906	8	8
MS35206-228	96906	9	61
MS35206-228	96906	15	36
MS35206-228	96906	15	75
MS35206-228	96906	19	7
MS35206-228	96906	19	80
MS35206-228	96906	21	53
MS35206-229	96906	9	40
MS35206-229	96906	15	59
MS35206-229	96906	19	55
MS35206-229	96906	30	4
MS35206-230	96906	2	24
MS35206-230	96906	9	72
MS35206-230	96906	15	18
MS35206-230	96906	20	21
MS35206-230	96906	21	83
MS35206-231	96906	21	48
MS35206-233	96906	7	54
MS35206-235	96906	8	13
MS35206-242	96906	7	46
MS35206-242	96906	19	38
MS35206-243	96906	15	101
MS35206-243	96906	21	6
MS35206-245	96906	7	22
MS35206-245	96906	14	11
MS35206-245	96906	22	2
MS35206-246	96906	2	50
MS35206-246	96906	7	39
MS35206-246	96906	15	103
MS35206-246	96906	21	29
MS35206-247	96906	2	13
MS35206-249	96906	2	15
MS35206-249	96906	21	25
MS35206-281	96906	35	15
MS35206-296	96906	22	44
MS35207-263	96906	1	9
MS35207-263	96906	21	38
MS35207-264	96906	2	33
MS35207-265	96906	35	8
MS35207-271	96906	18	4
MS35207-273	96906	15	81
MS35214-24	96906	19	64
MS35214-25	96906	15	97
MS35214-26	96906	14	15
MS35214-30	96906	19	59
MS35225-31	96906	21	51
MS35225-43	96906	9	20
MS35233-13	96906	22	41
MS35259-9	96906	35	11
MS35260-13	96906	35	5
MS35265-13	96906	19	31
MS35333-19	96906	7	27
MS35333-20	96906	7	7

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
MS35333-20	96906	8	9
MS35333-21	96906	7	23
MS35333-36	96906	9	62
MS35333-36	96906	15	10
MS35333-36	96906	32	21
MS35333-37	96906	9	90
MS35333-37	96906	15	19
MS35333-38	96906	2	14
MS35333-38	96906	9	22
MS35333-38	96906	14	10
MS35333-38	96906	15	57
MS35333-39	96906	9	14
MS35333-39	96906	15	107
MS35333-42	96906	19	45
MS35335-30	96906	15	98
MS35335-32	96906	15	73
MS35335-32	96906	15	86
MS35335-32	96906	18	3
MS35335-33	96906	15	106
MS35335-35	96906	9	60
MS35337-39	96906	9	42
MS35338-101	96906	2	68
MS35338-135	96906	33	2
MS35338-39	96906	21	36
MS35338-39	96906	21	73
MS35338-39	96906	22	8
MS35338-39	96906	27	2
MS35338-39	96906	34	6
MS35338-40	96906	2	62
MS35338-40	96906	7	9
MS35338-40	96906	19	32
MS35338-40	96906	21	56
MS35338-40	96906	26	3
MS35338-40	96906	34	21
MS35338-41	96906	2	49
MS35338-41	96906	7	28
MS35338-41	96906	14	2
MS35338-41	96906	15	60
MS35338-41	96906	15	85
MS35338-41	96906	19	8
MS35338-41	96906	19	56
MS35338-41	96906	19	81
MS35338-41	96906	21	52
MS35338-41	96906	30	5
MS35338-41	96906	37	5
MS35338-41	96906	38	4
MS35338-42	96906	2	52
MS35338-42	96906	14	7
MS35338-42	96906	15	92
MS35338-42	96906	15	102
MS35338-42	96906	19	40
MS35338-42	96906	21	18
MS35338-42	96906	31	8
MS35338-43	96906	1	10
MS35338-43	96906	2	32
MS35338-43	96906	21	39
MS35338-44	96906	2	63
MS35338-44	96906	15	67
MS35338-44	96906	35	16
MS35338-45	96906	22	45
MS35338-78	96906	22	42
MS35493-502	96906	35	18
MS35647-10	96906	30	9
MS35647-2	96906	34	29
MS35649-22	96906	21	75
MS35649-22	96906	27	6
MS35649-242	96906	2	61
MS35649-242	96906	7	10
MS35649-242	96906	9	29
MS35649-242	96906	15	32
MS35649-242	96906	21	57
MS35649-242	96906	34	31
MS35649-262	96906	2	48
MS35649-262	96906	7	14
MS35649-262	96906	8	10
MS35649-262	96906	9	91
MS35649-262	96906	14	3
MS35649-262	96906	15	20
MS35649-262	96906	15	87
MS35649-262	96906	19	9
MS35649-262	96906	19	69
MS35649-262	96906	20	12
MS35649-262	96906	21	61
MS35649-262	96906	30	6
MS35649-262	96906	37	6
MS35649-262	96906	38	5
MS35649-282	96906	2	53
MS35649-282	96906	7	40
MS35649-282	96906	9	21
MS35649-282	96906	14	8
MS35649-282	96906	15	56
MS35649-282	96906	19	48
MS35649-282	96906	21	17
MS35649-282	96906	31	6
MS35649-44	96906	33	3
MS35650-102	96906	9	13
MS35650-102	96906	15	72
MS35650-102	96906	2	31
MS35650-102	96906	15	88
MS35650-102	96906	18	5
MS35650-102	96906	22	24
MS35650-102	96906	15	68
MS35690-401	96906	2	64
MS35690-4010-401	96906	7	16
MS51029-29	96906	19	42
MS51936-21	96906	33	1
MS51957-14	96906	22	12
MS51963-20	96906	21	15
MS51963-33	96906	21	10
MS51964-31	96906	19	15
MS51964-48	96906	21	22
MS51964-48	96906	19	22
MS51964-49	96906	21	31
MS51964-49	96906	21	12
MS51964-54	96906	7	48
MS9021-010	96906	33	35
MS90707-4012	96906	22	6
MS9245-44	70903	19	11
MWC227J91	80058	1	8
MX1482TMQ5	80205	9	66
NAS601-408	08108	11	5
NE2	08108	12	3
NE2	08108	17	8
NE2	81349	7	19
NE51	74951	35	9
NX402B1	80058	1	2
PP968ATMQ5	81349	7	50
RA25NASA101AK	81349	7	35
RA25NASA201AK	81349	8	2
RB16AE121R0F	81349	8	16
RB16AE3560OF	81349	8	18
RB16AE385R0F	81349	8	17
RB16AE4R600F	81349	8	19
RB19AE41702F	81349	9	87
RB19CE10002F	81349	12	7
RCGF292K	81349	11	18
RC20GF102K	81349	11	14
RC20GF103K	81349	12	4
RC20GF103K	81349	18	23
RC20GF103K	81349	10	1
RC20GF104K	81349	11	13
RC20GF104K	81349	10	2
RC20GF105K	81349	11	16
RC20GF105K	81349	12	6
RC20GF105K	81349	13	3
RC20GF154K	81349	17	3
RC20GF182K	81349	12	8
RC20GF184K	81349	11	22
RC20GF184K	81349	16	4
RC20GF221K	81349	11	21
RC20GF222K	81349	9	75
RC20GF222K	81349	16	2
RC20GF222K	81349	17	6

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC20GF224K	81349	11	20
RC20GF224K	81349	12	9
RC20GF224K	81349	18	7
RC20GF272K	81349	10	4
RC20GF333K	81349	13	4
RC20GF333K	81349	18	17
RC20GF334K	81349	11	9
RC20GF335K	81349	11	7
RC20GF394K	81349	11	6
RC20GF471K	81349	18	11
RC20GF474K	81349	16	5
RC20GF474K	81349	18	1
RC20GF474K	81349	11	15
RC20GF474K	81349	17	2
RC20GF562K	81349	18	12
RC20GF564K	81349	11	8
RC20GF564K	81349	12	5
RC20GF822K	81349	9	78
RC30GF124K	81349	13	7
RC30GF273K	81349	11	11
RC30GF825K	81349	18	8
RC32GF206J	81349	16	6
RC32GF206J	81349	17	1
RC42GF153K	81349	18	2
RC42GF273K	81349	16	3
RC42GF683K	81349	17	5
RD88CTMQ5	80058	1	21
RU4NAYFD103A	77764	7	38
RV4LAYSA105A	81349	7	32
RV4LAYSA254A	81349	9	81
RV4LAYSA254A	81349	7	37
RV4LAYSA255A	81349	9	92
RV4LAYSA503A	81349	9	80
RV4LAYSA503A	81349	15	45
RV4LAYSA503A	81349	15	95
RW31V240	91637	18	20
RW32V222	81349	15	84
RW33G561	81349	15	79
R503AQ	35529	19	17
R8T1	43334	24	4
SC-B-125218	80063	16	8
SC-B-125338	80063	9	15
SC-B-1255151	80063	19	36
SC-B-1255152	80063	19	27
SC-B-125605	80063	22	21
SC-C-125220	80063	18	15
SC-D-125138	80063	7	56
SC-D-125321	80063	9	48
SC-D-125741	80063	2	2
SCA125107	80063	7	30
SCB125082	80063	1	19
SCB125083	80063	1	18
SCB125085	80063	1	16
SCB125086	80063	1	14
SCB125088	80063	1	13
SCB125106	80063	7	41
SCB125108-1	80063	7	18
SCB125108-1	80063	14	31
SCB125108-2	80063	7	21
SCB125109	80063	7	61
SCB125110	80063	7	62
SCB125113	80063	7	12
SCB125114	80063	7	11
SCB125115	80063	7	53
SCB125117	80063	7	47
SCB125123	80063	7	43
SCB125125	80063	2	3
SCB125125	80063	7	57
SCB125125	80063	9	49
SCB125125	80063	37	12
SCB125127	80063	7	65
SCB125128	80063	7	66
SCB125132	80063	7	5
SCB125211	80063	15	89
SCB125213	80063	15	96
SCB125215	80063	15	77
SCB125215	80063	15	82
SCB125217	80063	18	22
SCB125219	80063	17	13
SCB125221	80063	15	94
SCB125222	80063	15	71
SCB125223	80063	15	80
SCB125227	80063	15	17
SCB125228	80063	15	66
SCB125232	80063	15	93
SCB125232	80063	15	100
SCB125233	80063	15	14
SCB125238	80063	15	1
SCB125239	80063	15	29
SCB125312	80063	9	82
SCB125314	80063	9	67
SCB125315	80063	9	94
SCB125315-2	80063	9	89
SCB125322-1	80063	9	55
SCB125322-2	80063	9	71
SCB125324	80063	9	56
SCB125333	80063	9	26
SCB125334	80063	9	37
SCB125335	80063	9	36
SCB125336	80063	9	93
SCB125337	80063	9	11
SCB125340	80063	9	24
SCB125342	80063	9	50
SCB125405	80063	14	21
SCB125406	80063	14	13
SCB125407	80063	14	12
SCB125408	80063	14	30
SCB125409	80063	14	28
SCB125410	80063	14	26
SCB125411	80063	14	27
SCB125412	80063	14	20
SCB125413	80063	14	16
SCB125503	80063	19	70
SCB125510	80063	20	16
SCB125512	80063	19	50
SCB125513	80063	19	46
SCB125514	80063	19	34
SCB125516	80063	19	41
SCB125518-1	80063	21	80
SCB125518-2	80063	19	57
SCB125518-3	80063	19	53
SCB125518-4	80063	19	52
SCB125518-5	80063	29	4
SCB125519	80063	19	35
SCB125520	80063	19	58
SCB125521	80063	19	54
SCB125522	80063	19	29
SCB125524	80063	20	15
SCB125525-1	80063	20	14
SCB125525-2	80063	19	37
SCB125526	80063	20	22
SCB125528	80063	19	20
SCB125529	80063	19	26
SCB125530	80063	19	33
SCB125531	80063	20	17
SCB125532	80063	19	16
SCB125533	80063	19	19
SCB125534	80063	19	21
SCB125535	80063	19	25
SCB125536	80063	19	24
SCB125541	80063	20	6
SCB125542	80063	20	7
SCB125543	80063	20	8
SCB125544	80063	20	5
SCB125545	80063	20	9

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SCB125548	80063	19	61
SCB125552	80063	34	28
SCB125552-2	80063	34	38
SCB125553	80063	34	36
SCB125557	80063	34	26
SCB125558	80063	34	27
SCB125559	80063	34	30
SCB125560	80063	34	33
SCB125561	80063	34	34
SCB125563	80063	34	41
SCB125564	80063	34	37
SCB125575	80063	21	44
SCB125576	80063	21	46
SCB125577	80063	21	45
SCB125578	80063	21	43
SCB125578	80063	29	2
SCB125579	80063	22	52
SCB125580	80063	22	51
SCB125581	80063	22	48
SCB125582	80063	22	46
SCB125583	80063	21	63
SCB125584	80063	21	62
SCB125585	80063	21	60
SCB125586	80063	21	64
SCB125587	80063	21	21
SCB125588-1	80063	22	26
SCB125588-2	80063	22	20
SCB125590	80063	21	19
SCB125591	80063	21	27
SCB125592	80063	22	13
SCB125593	80063	21	23
SCB125594	80063	22	32
SCB125595	80063	21	32
SCB125596	80063	21	34
SCB125597	80063	21	33
SCB125598	80063	21	26
SCB125599	80063	21	24
SCB125600	80063	21	13
SCB125601	80063	22	18
SCB125602	80063	22	19
SCB125603	80063	22	17
SCB125604	80063	22	14
SCB125606	80063	22	22
SCB125607	80063	21	78
SCB125608	80063	21	77
SCB125609	80063	21	79
SCB125610	80063	21	11
SCB125611	80063	21	4
SCB125613	80063	23	3
SCB125614	80063	23	4
SCB125615	80063	22	33
SCB125616	80063	22	9
SCB125617	80063	22	4
SCB125618	80063	22	3
SCB125620	80063	21	59
SCB125621	80063	23	13
SCB125623	80063	21	9
SCB125626	80063	21	67
SCB125636	80063	29	8
SCB125653	80063	27	7
SCB125654	80063	21	28
SCB125655	80063	29	6
SCB125656	80063	29	5
SCB125657	80063	29	3
SCB125659	80063	22	23
SCB125660	80063	28	5
SCB125661	80063	25	3
SCB125661	80063	28	2
SCB125662	80063	25	4
SCB125662	80063	28	3
SCB125667	80063	22	31
SCB125668	80063	25	6
SCB125669	80063	25	1
SCB125671	80063	22	30
SCB125674	80063	21	40
SCB125686	80063	21	70
SCB125693	80063	24	2
SCB125694	80063	24	6
SCB125695	80063	24	7
SCB125697	80063	30	1
SCB125699	80063	30	7
SCB125709	80063	2	34
SCB125710	80063	2	59
SCB125712	80063	2	23
SCB125715	80063	2	17
SCB125716	80063	2	12
SCB125732	80063	2	42
SCB125733	80063	2	44
SCB125740	80063	2	41
SCB125748	80063	21	49
SCB125751	80063	30	12
SCB125753	80063	30	2
SCB125754	80063	30	14
SCB125755	80063	21	68
SCB125762	80063	25	5
SCB125762	80063	28	4
SCB125763	80063	21	1
SCB125769	80063	23	12
SCB125770	80063	23	10
SCB125771	80063	23	15
SCB125772	80063	23	17
SCB125773	80063	23	18
SCB125774	80063	23	19
SCB125775	80063	23	16
SCB125776	80063	23	20
SCB125777	80063	23	2
SCB125779	80063	23	1
SCB125780	80063	23	6
SCB125781	80063	22	10
SCB125782	80063	22	11
SCB125784	80063	21	5
SCB125785	80063	26	7
SCB125786	80063	26	5
SCB125787	80063	26	4
SCB125789	80063	34	8
SCB125790	80063	34	22
SCB125791	80063	34	11
SCB125792-1	80063	34	23
SCB125792-2	80063	34	24
SCB125793	80063	34	19
SCB21643	80063	36	10
SCB21644	80063	36	1
SCB21645	80063	36	6
SCB21646-3	80063	36	8
SCB30136-1	80063	36	4
SCB30136-2	80063	36	2
SCC125081	80063	1	11
SCC125084	80063	1	17
SCC125212	80063	15	91
SCC125224	80063	15	55
SCC125225	80063	15	63
SCC125231	80063	15	25
SCC125236	80063	15	27
SCC125311	80063	9	79
SCC125330	80063	9	57
SCC125331	80063	9	76
SCC125415	80063	14	17
SCC125523	80063	19	3
SCC125537	80063	20	13
SCC125540	80063	20	1
SCC125546	80063	20	2
SCC125547	80063	19	62
SCC125549	80063	20	3
SCC125556	80063	34	35
SCC125589	80063	21	37
SCC125612	80063	21	14
SCC125619	80063	22	1
SCC125633	80063	31	9
SCC125651	80063	22	29
SCC125652	80063	27	8
SCC125663	80063	21	16
SCC125696	80063	21	8
SCC125698	80063	30	8
SCC125702	80063	2	28
SCC125705GR1	80063	2	6
SCC125705GR2	80063	2	16
SCC125706GR1	80063	2	79
SCC125706GR2	80063	2	72
SCC125706GR3	80063	2	55
SCC125706GR4	80063	2	70

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SCC125707	80063	2	36
SCC125708-1	80063	2	30
SCC125708-2	80063	2	5
SCC125714	80063	2	7
SCC125720	80063	3	12
SCC125724-1	80063	5	1
SCC125724-2	80063	5	1
SCC125724-3	80063	6	1
SCC125724-4	80063	5	2
SCC125724-5	80063	5	2
SCC125724-6	80063	5	2
SCC125724-7	80063	5	2
SCC125725	80063	5	5
SCC125726	80063	5	5
SCC125727	80063	5	5
SCC125728	80063	5	5
SCC125729-2	80063	5	4
SCC125730-1	80063	5	4
SCC125730-2	80063	5	4
SCC125731	80063	2	38
SCC125734	80063	2	37
SCC125738	80063	2	39
SCC125739	80063	2	40
SCC125750	80063	30	10
SCC125752	80063	30	11
SCC125756	80063	21	3
SCC125768	80063	23	21
SCC125798	80063	34	15
SCC125802	80063	35	1
SCC21642-1	80063	36	3
SCC34953	80063	7	15
SCC598914	80063	36	5
SCC92349	80063	36	7
SCD125102	80063	7	17
SCD125118	80063	7	55
SCD125202	80063	15	23
SCD125226	80063	15	90
SCD125302	80063	9	65
SCD125303	80063	9	17
SCD125329	80063	9	59
SCD125402	80063	14	5
SCD125414	80063	14	34
SCD125505	80063	19	43
SCD125505-3	80063	34	40
SCD125555	80063	34	42
SCD125701-14	80063	2	21
SCD125703	80063	2	82
SCD125704	80063	2	54
SCD125711	80063	2	25
SCD125713	80063	2	1
SCD125721	80063	6	2
SCD125722	80063	6	2
SCD125723	80063	6	3
SCD125806	80063	35	12
SCD125807	80063	35	13
SCD20648	80063	4	4
SCD20650-30	80063	3	3
SCD598913	80063	36	9
SE39	61957	34	39
SE47	61957	17	11
SE48	61957	18	16
SH17	72653	2	20
SK5320-595	35529	34	14
SMB125129	80063	7	2
SMB133884	06840	34	1
SMB133885	80063	34	9
SMB133886	80063	34	18
SMB133887-1	80063	34	4
SMB133887-2	80063	34	2
SMB133888	80063	34	3
SMB133891	80063	34	13
SMB133892	80063	9	86
SMB133894	80063	8	21
SMB133894	80063	9	85
SMB133895	80063	8	20
SMB133896	80063	8	14
SMB133896	80063	9	88
SMB133897	80063	8	5
SMB133901	80063	9	84
SMB133902	80063	19	10
SMB133907	80063	21	74
SMB133914	80063	21	54
SMB133916	80063	21	65
SMB133917	80063	22	25
SMB133923	80063	19	14
SMB133929	80063	35	10
SMB133931	80063	21	2
SMB133933	80063	21	69
SMB133934	80063	2	65
SMB133935	80063	2	66
SMB133936	80063	2	69
SMB133937	80063	19	63
SMB133944	80063	34	25
SMB133945	80063	19	49
SMB133955	80063	34	16
SMB145656	80063	31	5
SMB204917	80063	33	8
SMB204917	80063	33	12
SMB204918	80063	33	14
SMB204918	80063	33	18
SMB204918	80063	33	26
SMB204919-1	80063	33	15
SMB204919-1	80063	33	21
SMB204920-1	80063	33	13
SMB204920-1	80063	33	19
SMB204922	80063	33	34
SMB204923	80063	33	24
SMB204924	80063	33	32
SMB204925	80063	33	31
SMB204926	80063	33	29
SMB204927	80063	33	41
SMB204928	80063	33	27
SMB204929	80063	33	25
SMB204930	80063	33	44
SMB204931	80063	33	45
SMB204932	80063	33	33
SMB204937	80063	33	10
SMB204938	80063	33	20
SMB204940	80063	33	23
SMB204941	80063	33	37
SMB204942	80063	33	39
SMB204945	80063	33	7
SMB374440	80063	10	3
SMB374441	80063	13	1
SMB374442	80063	17	10
SMB374443	80063	16	7
SMB374444	80063	12	11
SMB374454	80063	3	11
SMB374455	80063	3	6
SMB374470	80063	22	38
SMB374471	80063	32	16
SMB374472	80063	32	13
SMB374473	80063	32	15
SMB374474	80063	32	14
SMB374475	80063	32	19
SMB374478-1	80063	32	8
SMB374478-2	80063	32	7
SMB374478-3	80063	32	6
SMB374479	80063	32	17
SMB374484	80063	32	10
SMB374485	80063	32	9
SMB374487-1	80063	32	2
SMB374487-2	80063	32	18
SMB429405	80063	33	9
SMB429406	80063	33	36
SMB429407	80063	33	17
SMB429408	80063	33	5
SMC125310	80063	9	70
SMC133890	80063	22	40
SMC133893	80063	8	6
SMC133900	80063	7	45
SMC133911	80063	19	1
SMC133930	80063	24	3
SMC133930-1	80063	24	1
SMC133949	80063	14	23
SMC133951	80063	2	73
SMC133952	80063	35	17
SMC145647	80063	21	30
SMC145649	80063	19	12
SMC145650	80063	22	39

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMC145653	80063	2	75
SMC204921	80063	33	11
SMC204934	80063	33	38
SMC374445	80063	18	13
SMC374446	80063	11	25
SMC374480	80063	32	1
SMC374481	80063	32	11
SMC374486	80063	31	3
SMC429409	80063	22	43
SMD125103	80063	7	20
SMD125137	80063	7	58
SMD125332	80063	9	39
SMD125507	80063	19	76
SMD133906-4	80063	9	19
SMD133919	80063	21	42
SMD133920	80063	15	65
SMD133921	80063	21	41
SMD133925	80063	15	64
SMD145645	80063	19	71
SMD145646	80063	19	75
SMD145651	80063	19	65
SMD145657	80063	19	60
SMD145657-5	80063	19	44
SMD145658	80063	19	77
SMD204916	80063	33	40
SMD204943	80063	31	1
SMD374448	80063	2	26
SMD374449	80063	2	74
SMD374456	80063	4	1
SMD374457	80063	4	2
SMD374461	80063	3	9
SMD374464	80063	3	8
SS1216B	57068	2	78
SS1216B	57068	35	2
SS58077	61864	35	4
SS58685	61864	35	14
ST42D	04009	9	77
S1097	77893	35	7
S303AB	71785	15	99
S716	37942	34	10
TS101P02	80058	9	69
TS101P02	80058	15	42
TS102P01	81349	15	43
TS103P01	00629	15	44
TS103P01	73690	9	44
TS103U02	80058	9	5
UB241	90201	7	60
X207	70485	2	71
1029S4	96906	2	35
1036	71785	7	36
1036	71785	14	4
1036	71785	19	4
1036	71785	19	79
1036	71785	21	84
105-601-1	74970	9	46
105-601-1	74970	15	51
105-602-5	74970	9	95
105-602-5	74970	15	53
105-605-1	74970	9	45
105-605-1	74970	15	49
105-606-1	74970	15	50
105-609-1	74970	9	43
105-609-1	74970	15	52
105-610-1	74970	9	47
105-610-1	74970	15	54
1056031	74970	15	48
1056071	74970	9	38
1060-1	07387	15	28
1068	71785	2	8
1068	71785	8	11
1068	71785	15	37
1068	71785	19	78
1069	71785	2	10
1069	71785	7	29
1069	71785	9	18
1069	71785	15	34
1070	71785	2	27
1070	71785	9	74
1070	71785	15	89
116-266-2	74970	7	51
12ATWA	95303	9	1
12AX7	95303	9	31
12AY7	95303	9	28
121002	75915	17	9
1222-01	78189	19	18
143	76281	2	45
15126	82205	22	5
15127	82205	22	34
15128	82205	22	16
15129	82205	9	41
15130	82205	33	6
15131	82205	33	28
15131	82205	33	30
15132	82205	33	22
15133	82205	33	16
15134	82205	15	78
15134	82205	15	83
15134	82205	18	21
15135	82205	15	74
15136	82205	37	11
15136	82205	38	8
15137	82205	2	11
15138	82205	37	7
15138	82205	38	7
15143	82205	12	12
2-20S1220PVC	70903	37	1
2THAT	66150	15	39
2120-06-00	78189	9	64
2120-06-00	78189	21	47
2120-08-00	78189	7	63
2120-08-00	78189	14	9
2120-08-00	78189	15	104
213	79963	2	56
22NC2193-3-62	72962	9	53
2209-7	71468	2	58
225	90201	7	49
24-2-0-11	35529	9	35
244-16	71286	3	2
25-0203	78189	27	1
302-2B	07387	15	35
302-2C	07387	15	31
302-2D	07387	15	8
32	66150	15	40
369S	57737	7	1
38-504-07-13	94222	3	7
38T84	81349	14	1
4YHAT	66150	15	3
4002-14	71286	3	5
4002P3187	71286	3	4
4007	77147	26	9
4029	77147	27	3
42	66150	15	5
5R4WGB	49956	15	2
5YHAT	66150	15	7
52	66150	15	62
53-0408-0993-341	72619	7	24
5651WA	03507	15	13
5751	95303	9	8
5814A	95303	9	6
6AS7G	95303	15	6
6AU6WC	95303	15	12
6Y6GT	95303	15	38
6005-6AQ5W	95303	15	11
6L-332-7T	42689	7	44
6189	95303	15	30
6303C	72653	19	72
7TS102U02	03507	15	26
72002	70485	9	7
7663K5	15605	7	42
77R2X1	43334	25	2
77R2X1	43334	28	1
77R2X1	43334	29	1

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
77038X1	43334	22	47
774X1	43334	22	49
926E3	07387	9	23

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5310-00-012-0614	15	107
5340-00-197-8812	8	7
5325-00-276-5954	15	105

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
MS35489-49	96906	15	105
MS35650-102	96906	15	107
SCC125087	80063	1	12
SCC125729-1	80063	5	4
1069	71785	8	7

ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5310-00-045-4007	9	54
5940-00-050-7021	7	4
5940-00-050-7021	9	73
6210-00-053-8387	7	24
5905-00-106-1282	11	17
5905-00-114-5489	18	19
5320-00-117-7294	3	10
5320-00-117-7294	5	3
5905-00-120-9152	10	5
5910-00-129-6260	14	6
5910-00-129-6260	22	35
5910-00-160-1158	11	2
5905-00-171-2000	11	24
5905-00-171-2000	12	10
5905-00-171-2000	17	7
5940-00-177-6738	18	14
6660-00-179-8633	1	7
5905-00-190-8885	13	5
5905-00-190-8885	18	10
3110-00-198-2922	23	8
3110-00-198-2922	23	9
5905-00-247-8710	18	6
5905-00-247-8730	17	4
5905-00-249-3642	11	12
5905-00-249-3642	18	9
5365-00-263-5917	23	5
5905-00-279-1754	11	10
5905-00-279-1943	13	6
5920-00-281-0205	15	47
5935-00-283-2916	21	58
5330-00-291-1963	20	5
5905-00-369-6923	11	23
5310-00-378-5143	21	62
5905-00-456-0662	18	18
5905-00-501-5184	9	80
5905-00-501-5184	15	45
5905-00-501-5184	15	95
5395-00-501-5487	9	95
5395-00-501-5487	15	53
5910-00-581-0009	9	10
3020-00-640-4659	30	8
5355-00-667-6260	19	49
5310-00-682-5939	23	17
5310-00-687-7791	23	19
5305-00-724-5805	21	10
5910-00-725-4795	11	1
5310-00-753-4037	19	20
5325-00-806-8448	3	4
5905-00-815-3417	8	1
5910-00-825-1842	9	33
5910-00-825-1842	15	41
5910-00-832-5724	11	4
5905-00-857-6514	8	15
5905-00-857-6531	8	3
5905-00-857-6911	8	4
5365-00-893-5545	33	35
5305-00-899-3995	7	16
5940-00-926-0037	8	22
5940-00-926-0037	9	83
5305-00-926-5637	32	4
5310-00-934-9751	9	13
5310-00-934-9751	15	72
5305-00-958-6381	27	4
5940-00-983-6085	21	50
5940-00-983-6115	21	82
5305-00-984-5676	22	44
5910-00-984-8373	11	3

CONTINUE ON NEXT PAGE - PART NUMBER INDEX

ADDITIONAL LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CM15FD101GP3	81349	11	3
CM15FD680G03	81349	11	4
CM20D331J	81349	11	2
CM20FD102G03	81349	11	1
CP91BIEF254K1	81349	9	10
CP91BIEG104K	81349	9	33
CP91BIEG104K	81349	15	41
MS20426D4-6	96906	3	10
MS2102A10SL4P	96906	21	58
MS35338-41	96906	9	54
M55155-30-15	81349	18	14
RB16CE10001F	81349	8	4
RB16CE150R0F	81349	8	1
RB16CE24900F	81349	8	15
RB16CE28700F	81349	8	3
RC20GF155J	81349	11	10
RC20GF225J	81349	13	5
RC20GF225J	81349	18	10
RC20GF684J	81349	11	24
RC20GF684J	81349	12	10
RC20GF687J	81349	17	7
RC32G220JS	81349	18	6
RC42GF184J	81349	13	6
RC42GF393J	81349	11	12
RC42GF393J	81349	18	9
RCR07G274JS	81349	10	5
RCR20G223JS	81349	11	17
RCR20G823JS	81349	18	19
RCR32G822JS	81349	18	18
RCR32G223JS	81349	11	23
RCR32G394JS	81349	17	4
SS77R3X3E	43334	23	8
SS77R3X3E	43334	23	9
38TB2	81349	21	82
38TB7	81349	21	50
1942-2-05	71279	8	22
1942-2-05	71279	9	83
2118-10-10	78189	7	4
2118-10-10	78189	9	73

☆ U.S. GOVERNMENT PRINTING OFFICE : 1985 O - 461-202 (20199)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER	DATE	TITLE
TM 11-5840-340-12	23 Jan 74	Radar Set AN/APX-76

BE EXACT. . .PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	
2-25	2-28			Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°. REASON: Experience has shown that with only a 1° lag, the antenna servo system is too sensitive to wind gusting in excess of 25 knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 2° without degradation of operation.
3-10	3-3		3-1	Item 5, Function column. Change "2 db" to "3db." REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator.
5-6	5-8			Add new step f.1 to read, "Replace cover plate removed in step e.1, above." REASON: To replace the cover plate.
		F03		Zone C 3. On J1-2, change "+24 VDC to "+5 VDC." REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage.

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER	SIGN HERE:
SSG I. M. DeSpiritof 999-1776	SSG I. M. DeSpiritof

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FINDS," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

TEAR ALONG DOTTED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM11-6660-204-24P-1	24 Nov 78	RECORDING SET, WEATHER DATA AN/TMQ-5C

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

FOLD BACK

TEAR ALONG DOTTED LINE

REVERSE OF DA FORM 2028-2

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM11-6660-204-24P-1	24 Nov 78	RECORDING SET, WEATHER DATA AN/TMQ-5C

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

FOLD BACK

TEAR ALONG DOTTED LINE

REVERSE OF DA FORM 2028-2

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 11-6660-204-24P-1	24 Nov 78	RECORDING SET, WEATHER DATA AN/TMQ-5C

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

FOLD BACK

TEAR ALONG DOTTED LINE

REVERSE OF DA FORM 2028-2

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

Active Army:

HISA (Ft Monmouth) (26)
USAINSCOM (2)
COE (1)
TSG (1)
USAARENBD (1)
DARCOM (1)
TRADOC (2)
OS Maj Comd (4)
TECOM (2)
USACC (4)
MDW (1)
Armies (2)
Corps (2)
TRADOC (2)
USAREUR (5)
Svc Colleges (1)
USASIGS (5)
USAADS (10)
USAFAS (10)
USAARMS (5)
USAIS (5)
USAES (2)
USAICS (3)
MAAG (1)
USARMIS (1)
USAERDAA (1)
USAERDAW (1)
USAFABD (2)
Ft Gordon (10)
Ft Huachuca (10)
Ft Carson (5)
Army Dep (1) except
LBAD (14)
SAAD (30)
TOAD (14)
SHAD (3)
Ft Gillem (10)
USA Dep (1)
Sig Sec USA Dep (1)
Ft Richardson (CERCOM Ofc)
Units reg under fol TOE:
(2 cys each)
29-207
29-610
(1 cy each)
6-100
6-185
6-186
6-200
6-201
6-300
6-302
6-525
6-526
6-575
6-700
6-701
7
7-100
11-15
11-36
11-95
11-215
11-237
11-35
11-500 (AA-AC)
17
17-100
29-134
29-136
37
37-100
39-51
57
67

NG: State AG (O); Units—None
USAR: None
For explanation of abbreviations used, see AR 310-50.